





Getting Started with Docker

Arun Gupta, @arungupta
VP Developer Advocacy, Couchbase

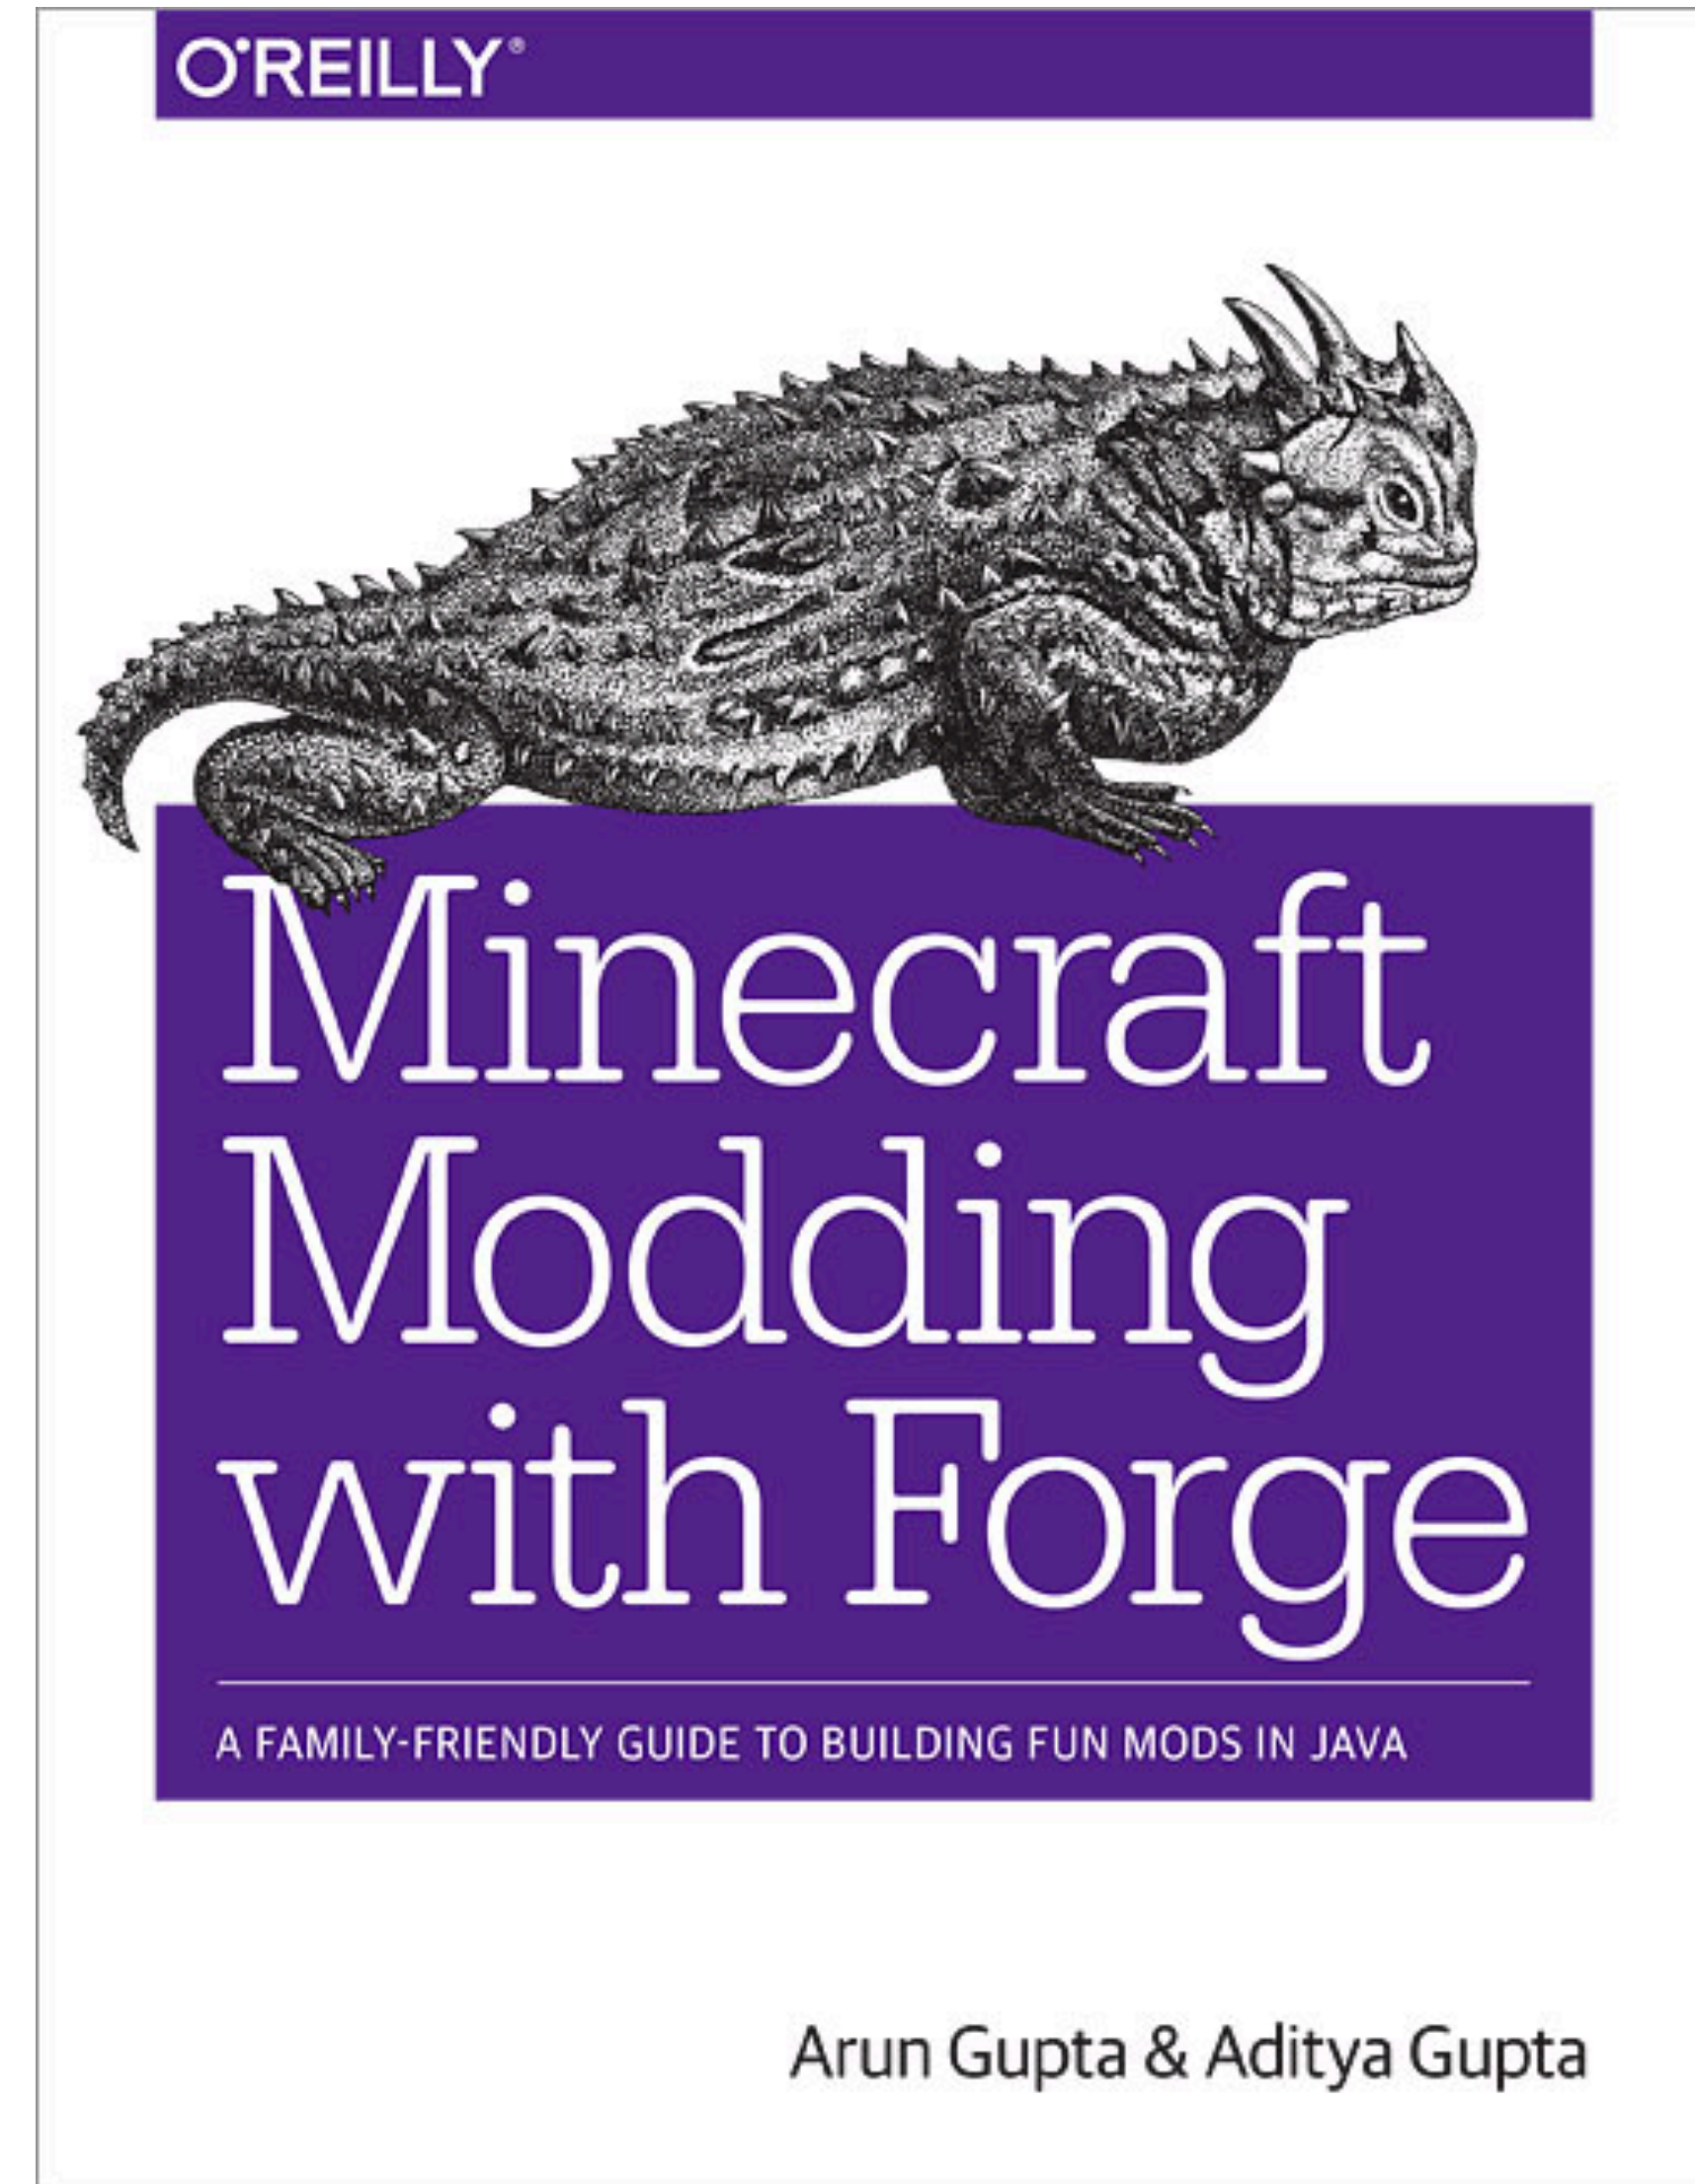


What is Docker?


- Open source project and company

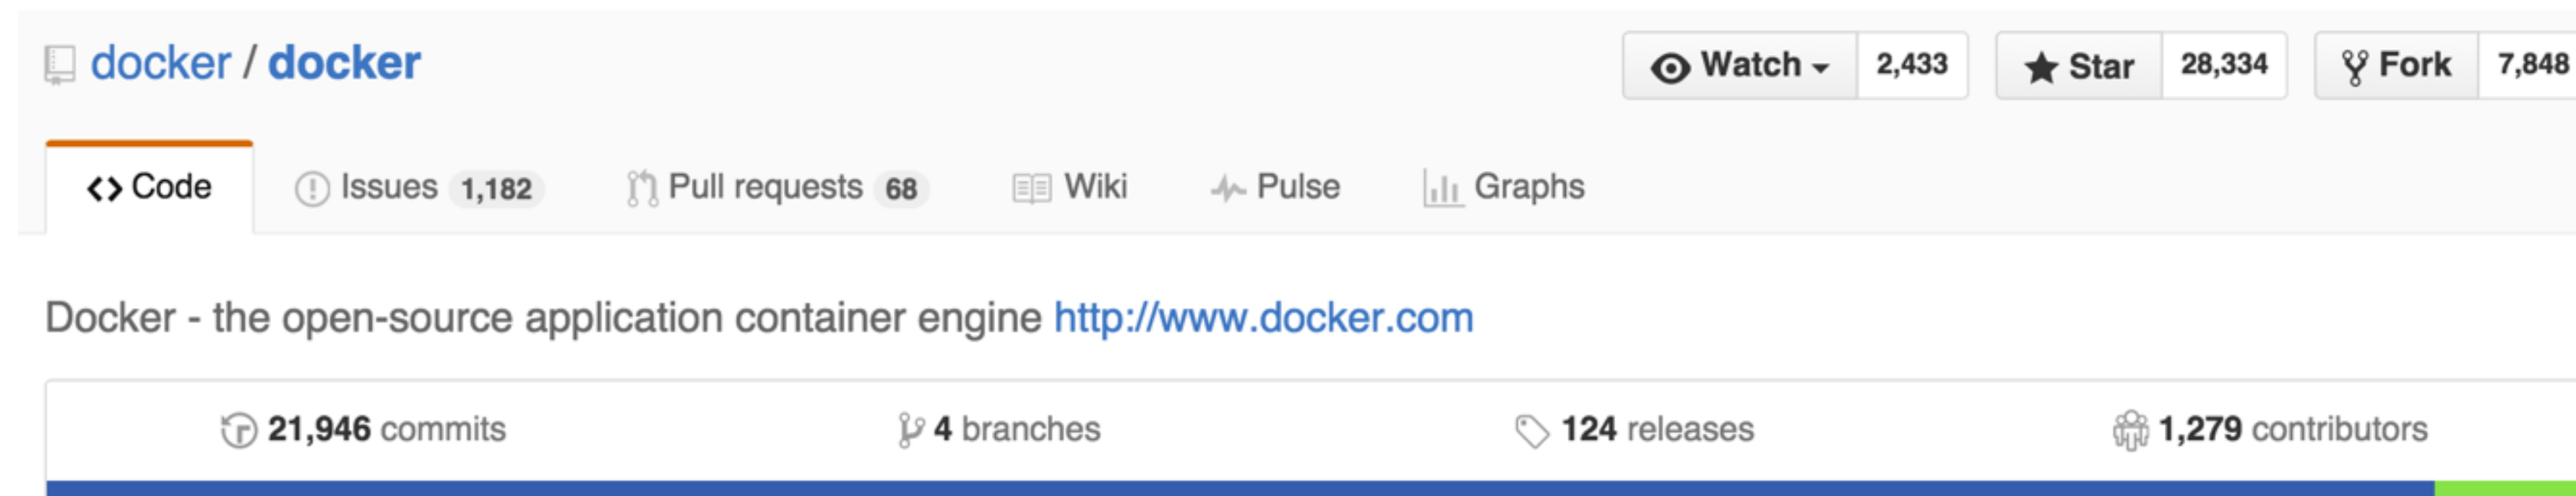

- Used to create containers for software applications
- Package Once Deploy Anywhere (PODA)

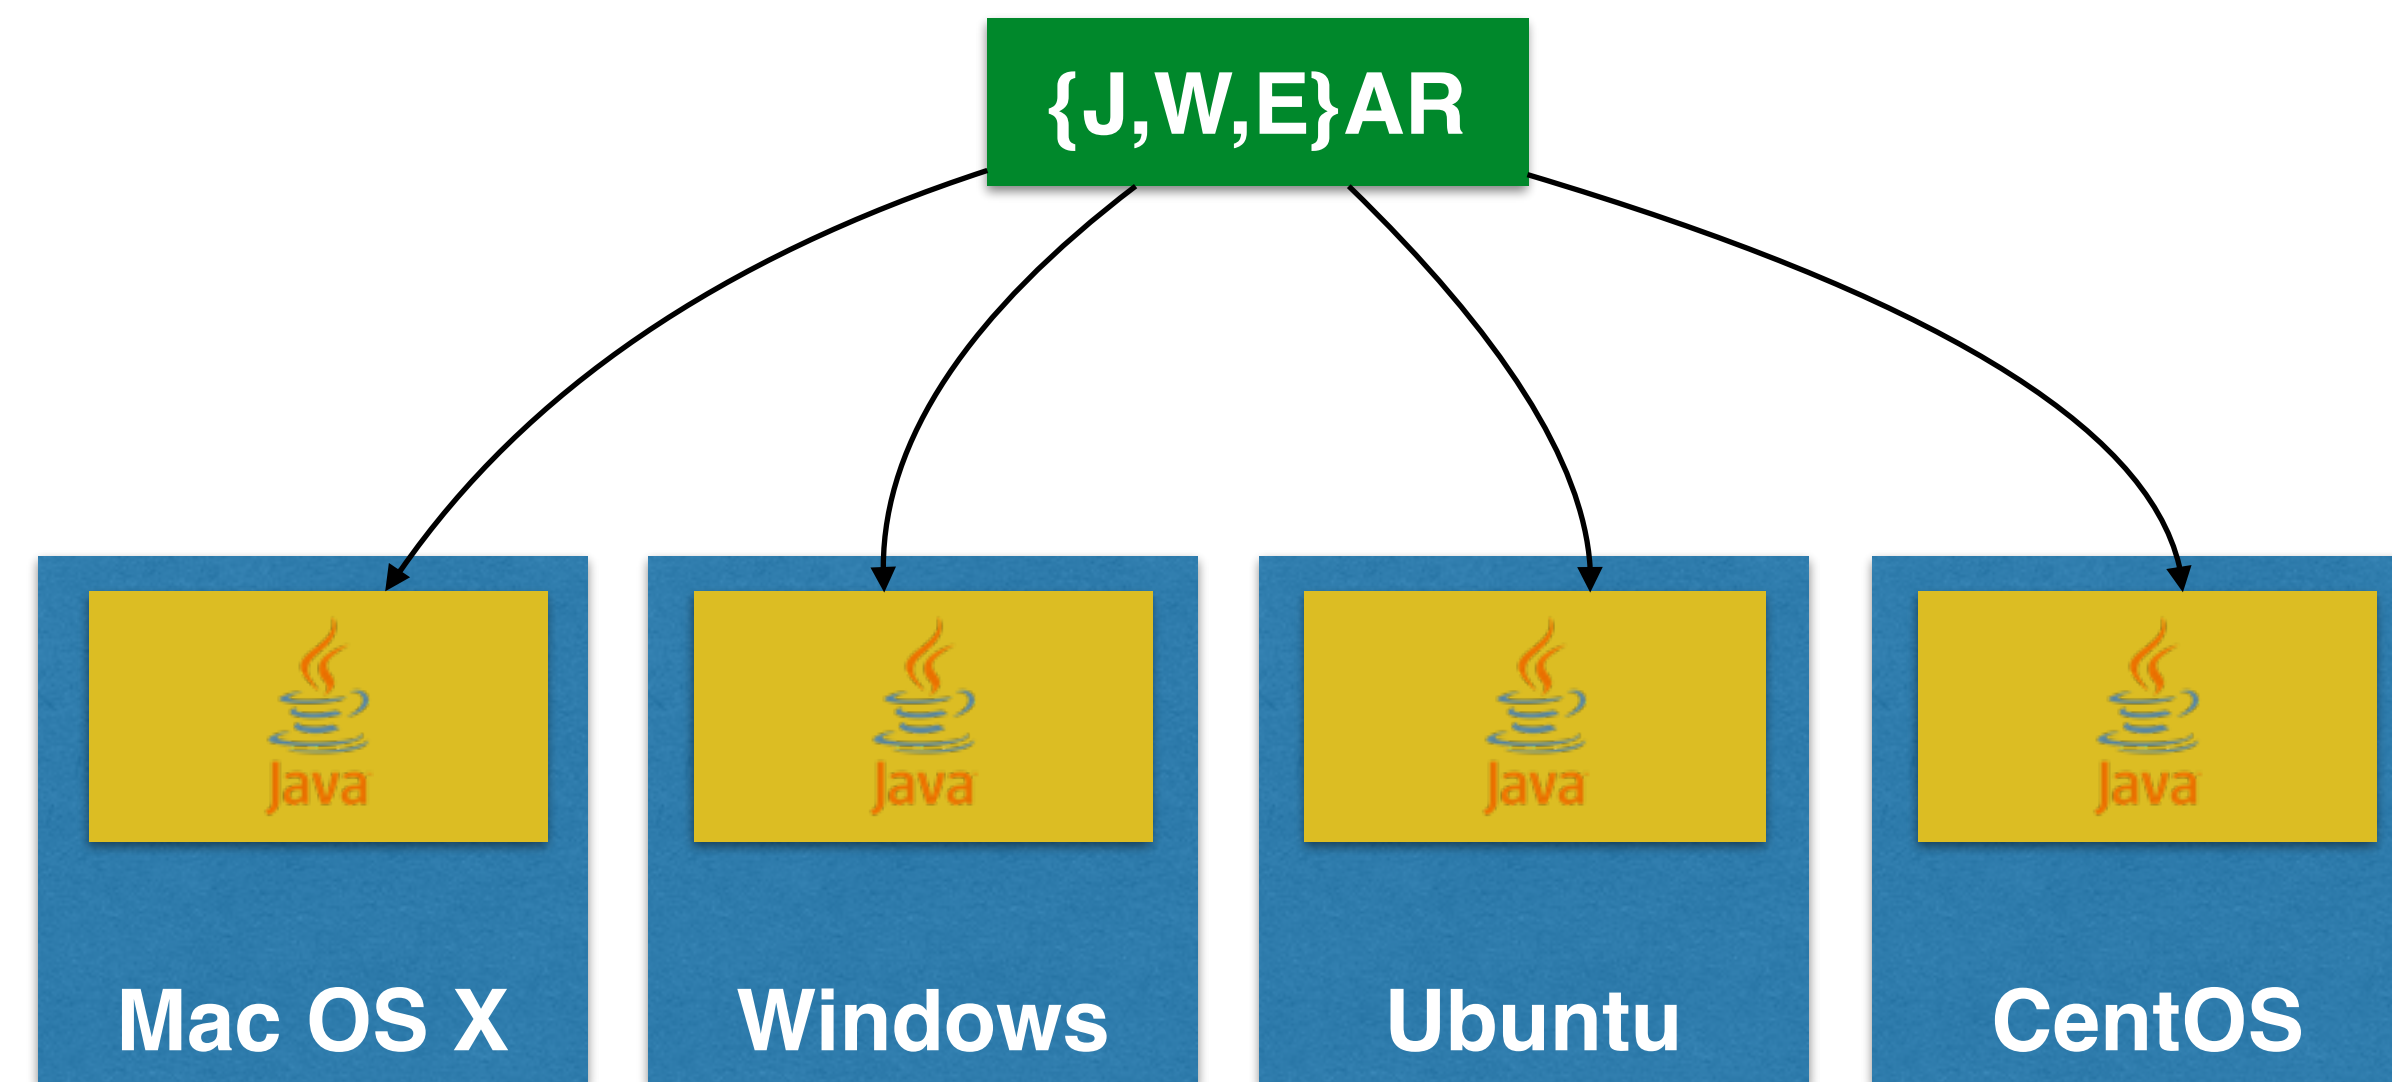

WORA = Write Once Run Anywhere

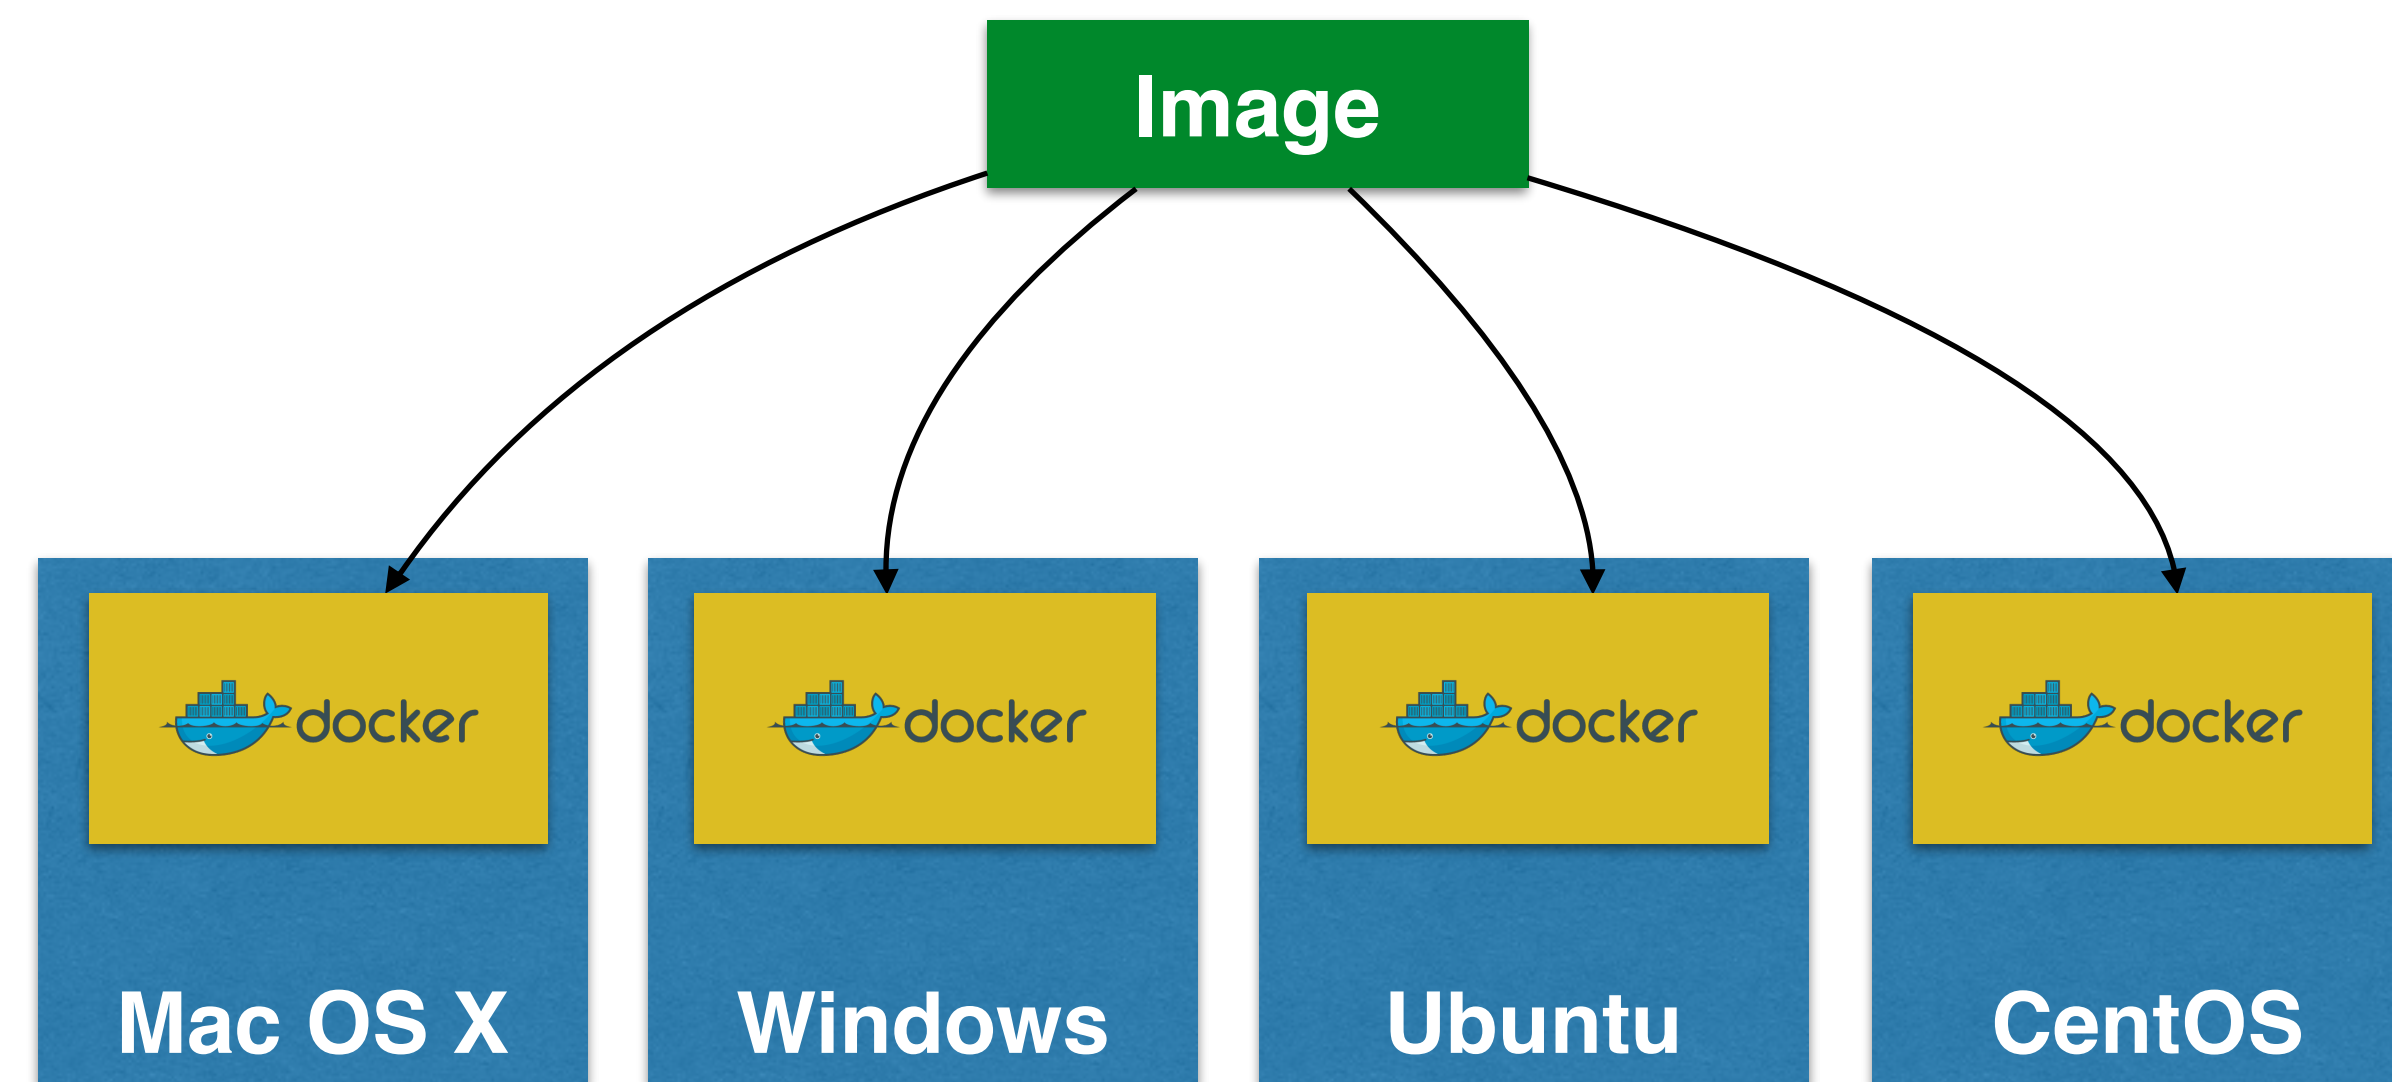


PODA = Package Once Deploy Anywhere

Docker Mission



Build




Ship






Run

Distributed Applications

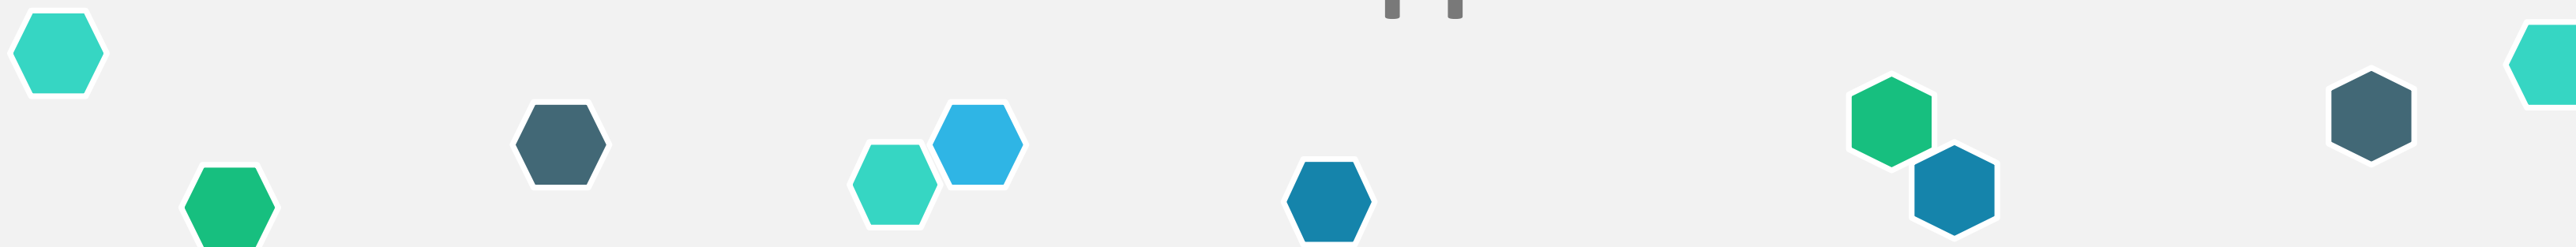

Anywhere



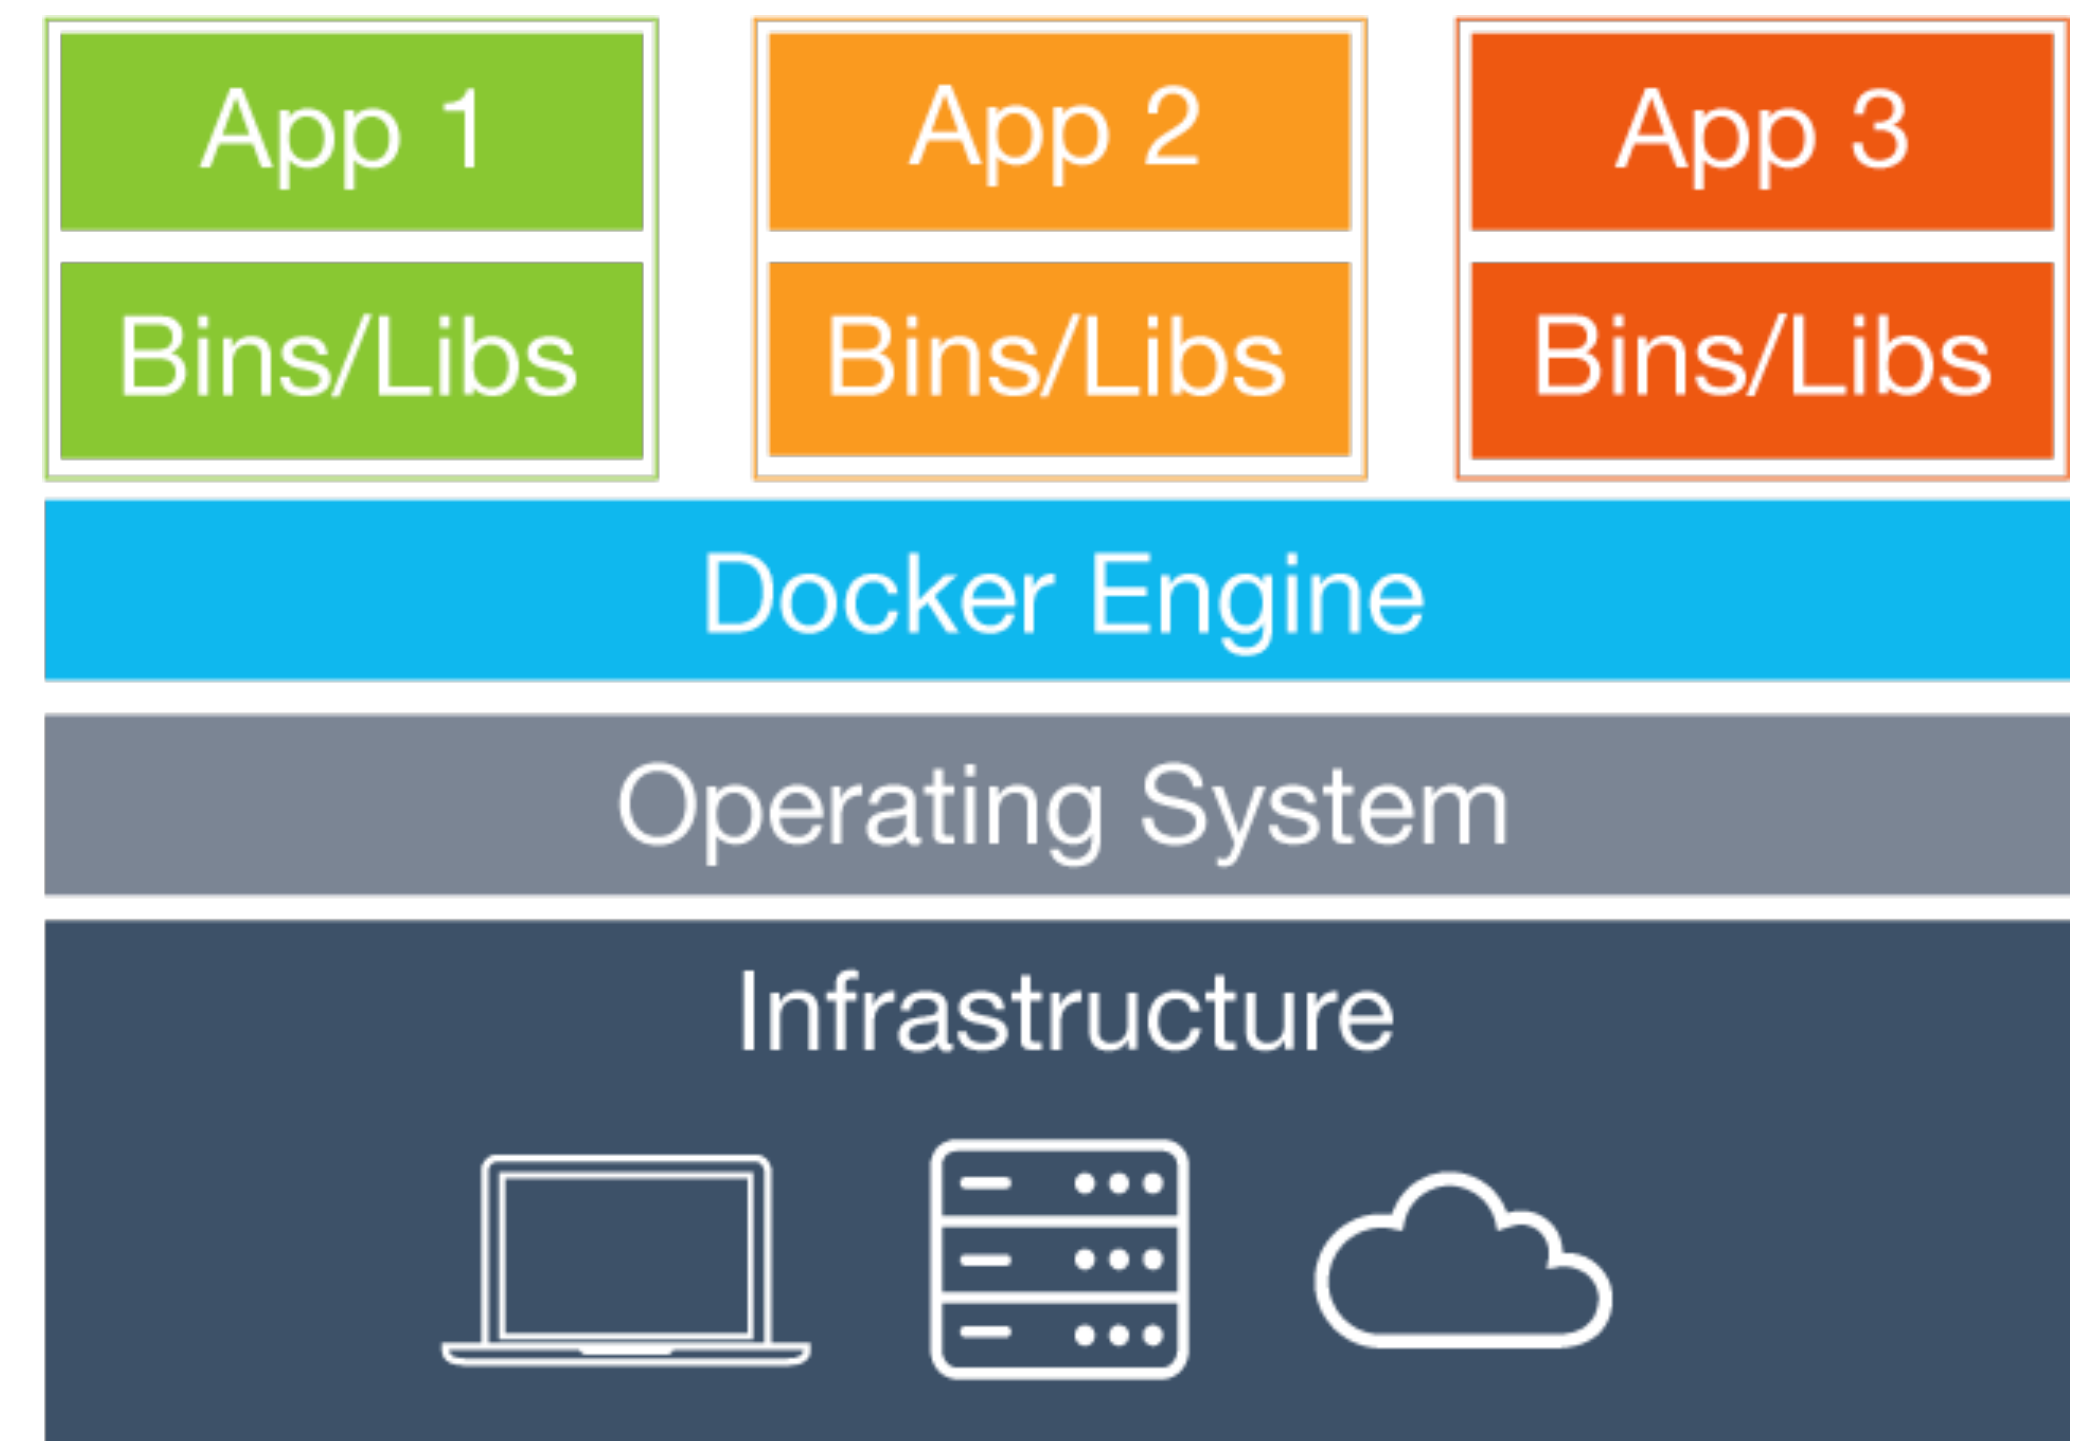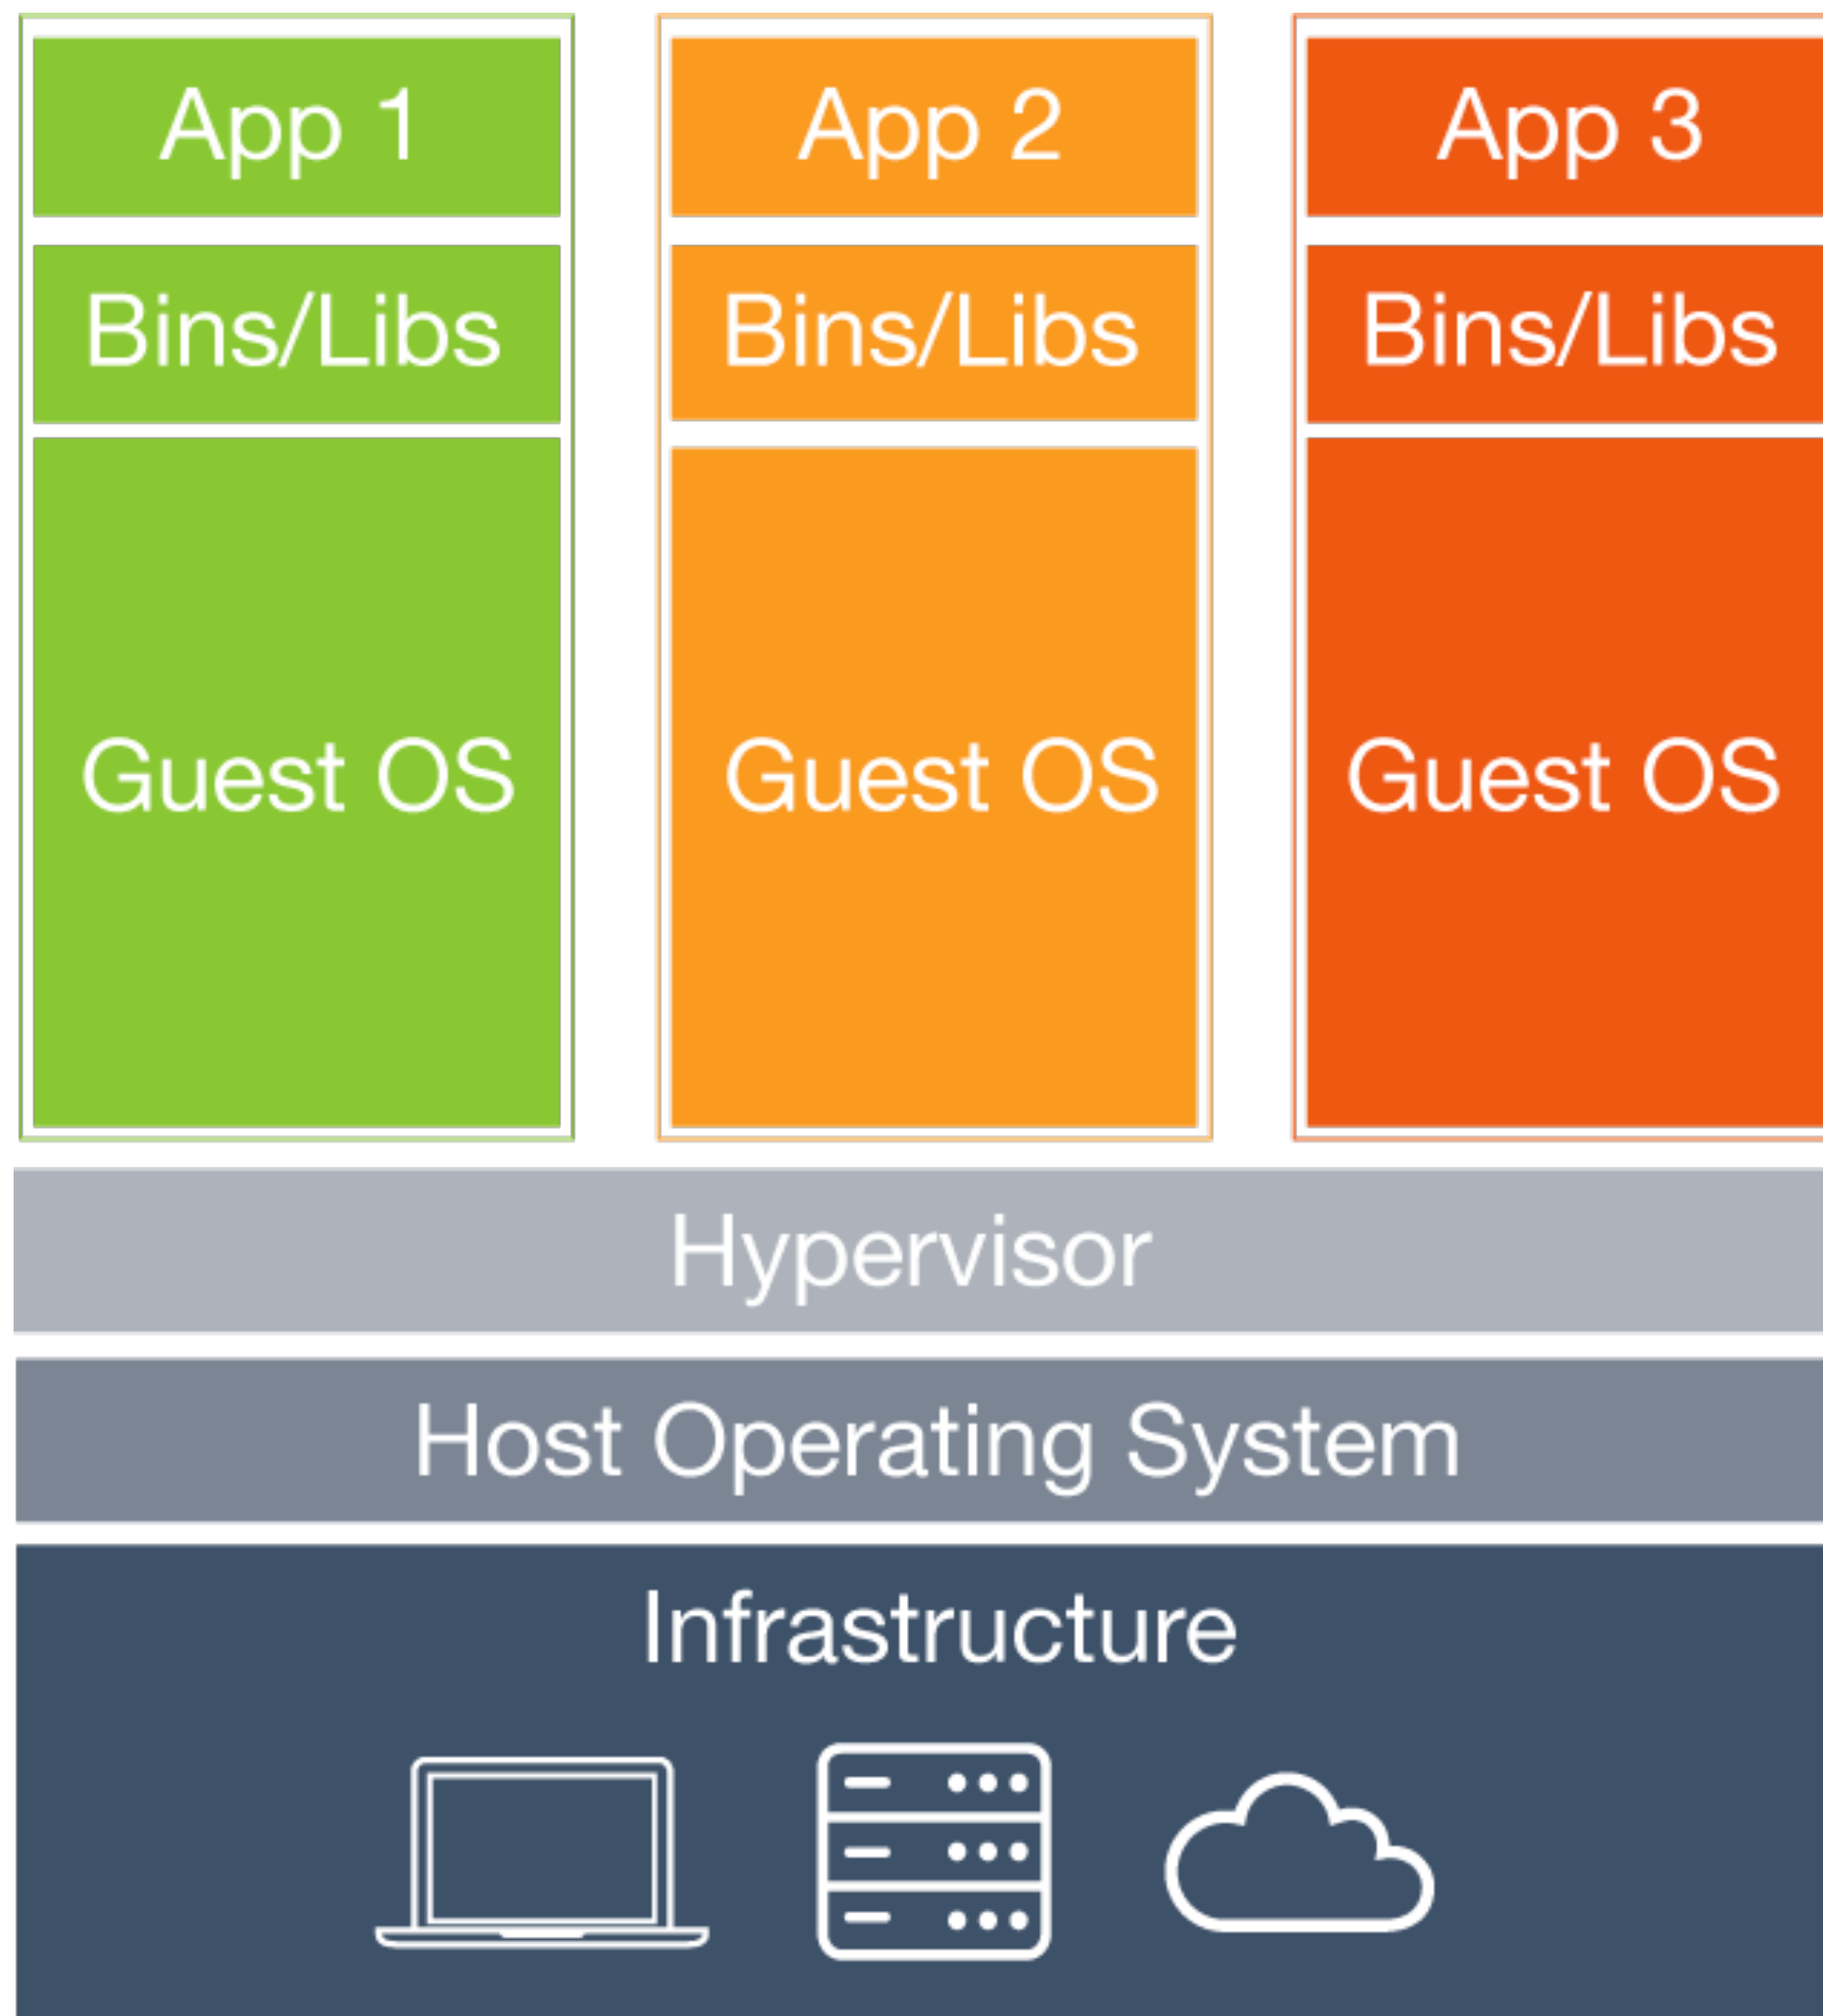



Build

Develop an app using Docker containers with any language and any toolchain.

```
FROM ubuntu
```

```
CMD echo "Hello world"
```

```
FROM jboss/wildfly
```

```
RUN curl -L https://github.com/javaee-  
samples/javaee7-hol/raw/master/solution/  
movieplex7-1.0-SNAPSHOT.war -o /opt/jboss/  
wildfly/standalone/deployments/  
movieplex7-1.0-SNAPSHOT.war
```

Dockerfile reference

Usage

Format

Environment replacement

.dockerignore file

FROM

MAINTAINER

RUN

Known issues (RUN)

CMD

LABEL

EXPOSE

ENV

ADD

COPY

ENTRYPOINT

Exec form ENTRYPOINT example

Shell form ENTRYPOINT example

VOLUME

USER

WORKDIR


ARG

ONBUILD

STOPSIGNAL

Dockerfile examples

Docker Workflow

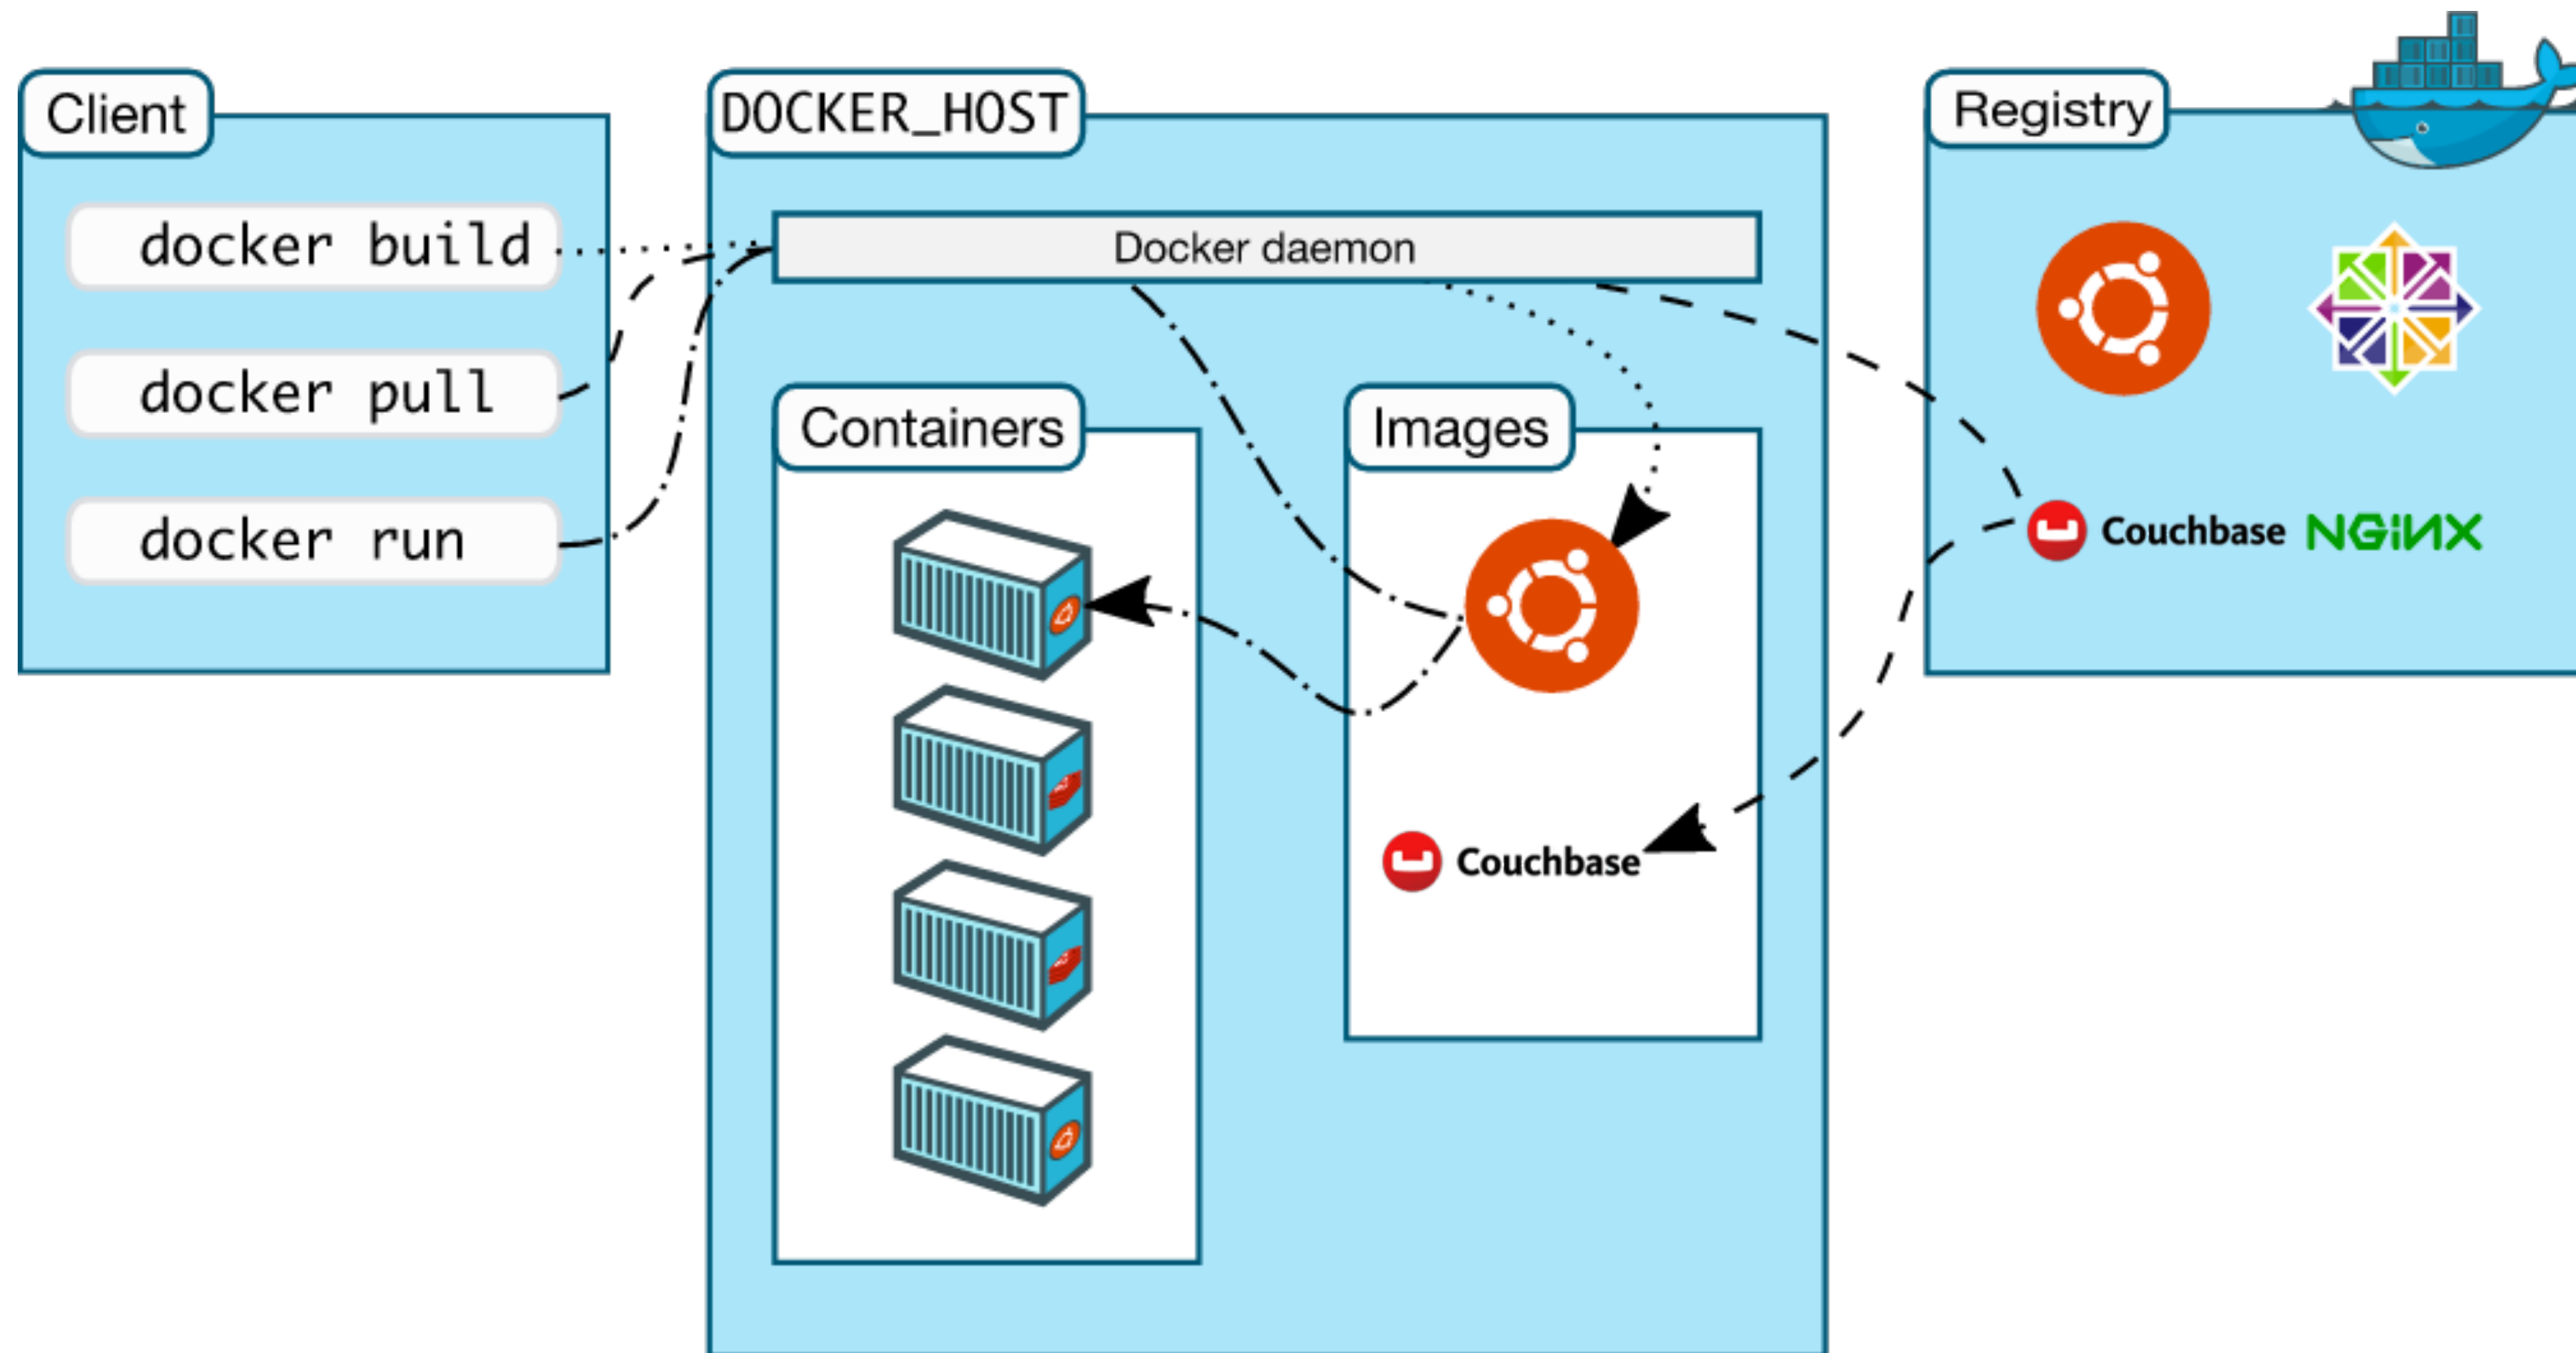

Union File System

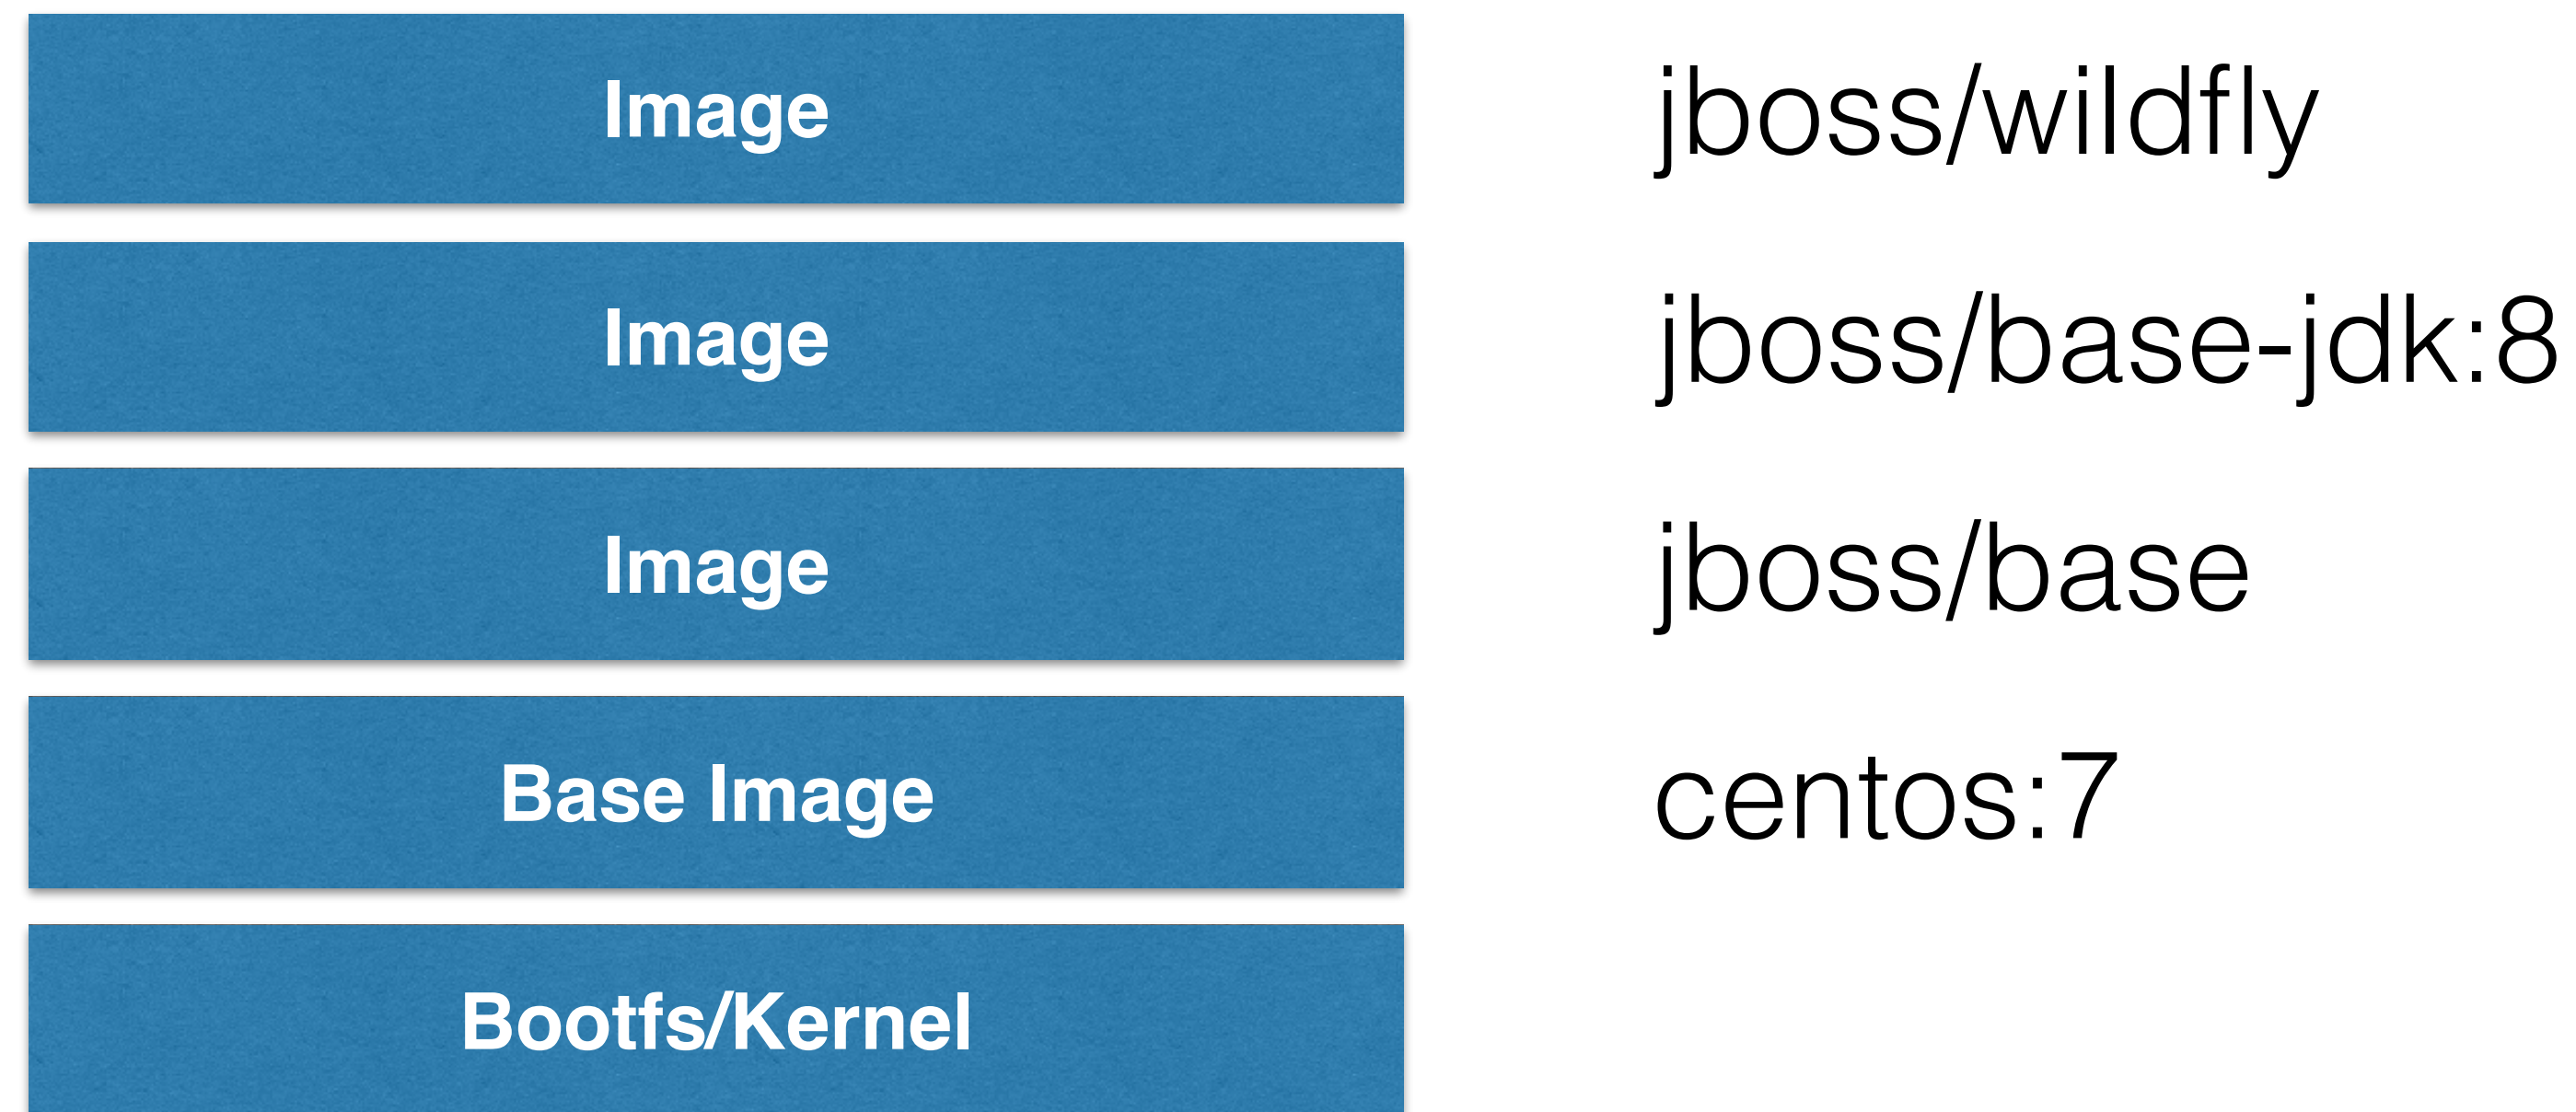


Image Layers - Couchbase

```
~ > docker images couchbase
```

REPOSITORY	TAG	IMAGE ID	CREATED	VIRTUAL SIZE
couchbase	latest	45abdd57689a	3 weeks ago	372 MB

```
~ > docker history couchbase
```

IMAGE	CREATED	CREATED BY	SIZE
45abdd57689a	3 weeks ago	/bin/sh -c #(nop) VOLUME [/opt/couchbase/var]	0 B
dd8c5611343d	3 weeks ago	/bin/sh -c #(nop) EXPOSE 11207/tcp 11210/tcp	0 B
30852bbad62b	3 weeks ago	/bin/sh -c #(nop) CMD ["couchbase-server"]	0 B
5537747ea12f	3 weeks ago	/bin/sh -c #(nop) ENTRYPOINT &{["/entrypoint.	0 B
e8a83a5448df	3 weeks ago	/bin/sh -c #(nop) COPY file:cbb44c9c65b64a9dc	182 B
18165b90fefa	3 weeks ago	/bin/sh -c #(nop) COPY file:34e32c52f0895191f	389 B
5f37b8bdc5a6	3 weeks ago	/bin/sh -c wget -N \$CB_RELEASE_URL/\$CB_VERSION	212.1 MB
1a8da511d01b	3 weeks ago	/bin/sh -c groupadd -g 1000 couchbase && user	328.7 kB
d9b2222c39b4	3 weeks ago	/bin/sh -c #(nop) ENV CB_VERSION=4.0.0 CB_REL	0 B
815f08b3c781	3 weeks ago	/bin/sh -c apt-get update && apt-get inst	23.57 MB
fc38f156c0ea	3 weeks ago	/bin/sh -c #(nop) MAINTAINER Couchbase Docker	0 B
2a7a952931ec	3 weeks ago	/bin/sh -c #(nop) CMD ["/bin/bash"]	0 B
10f1b5844a9c	3 weeks ago	/bin/sh -c sed -i 's/^#\s*\s*(deb.*universe\)\$/'	1.911 kB
23c388b926b6	3 weeks ago	/bin/sh -c echo '#!/bin/sh' > /usr/sbin/polic	156.2 kB
b45376f323f5	3 weeks ago	/bin/sh -c #(nop) ADD file:4a9e089e81d6581a54	135.9 MB


Image Layers - WildFly

```
~ > docker images jboss/wildfly
```

REPOSITORY	TAG	IMAGE ID	CREATED	VIRTUAL SIZE
jboss/wildfly	latest	be97bf33ad55	2 weeks ago	584.5 MB

```
~ > docker history jboss/wildfly
```

IMAGE	CREATED	CREATED BY	SIZE	COMMENT
be97bf33ad55	2 weeks ago	/bin/sh -c #(nop) CMD ["/opt/jboss/wildfly/bi	0 B	
fd24a9f17c67	2 weeks ago	/bin/sh -c #(nop) EXPOSE 8080/tcp	0 B	
f5dea43156ba	2 weeks ago	/bin/sh -c #(nop) ENV LAUNCH_JBOSS_IN_BACKGR0	0 B	
b17d8182afad	2 weeks ago	/bin/sh -c cd \$HOME && curl -0 https://do	159.1 MB	
00429dab510a	2 weeks ago	/bin/sh -c #(nop) ENV JBOSS_HOME=/opt/jboss/w	0 B	
ca2596a51c35	2 weeks ago	/bin/sh -c #(nop) ENV WILDFLY_SHA1=75738379f7	0 B	
62de294133f4	2 weeks ago	/bin/sh -c #(nop) ENV WILDFLY_VERSION=9.0.2.F	0 B	
52940fa06773	3 months ago	/bin/sh -c #(nop) ENV JAVA_HOME=/usr/lib/jvm/	0 B	
bda081e220a9	3 months ago	/bin/sh -c #(nop) USER [jboss]	0 B	
1681ffdbbe50	3 months ago	/bin/sh -c yum -y install java-1.8.0-openjdk-	195.3 MB	
3b4e1d18fb41	3 months ago	/bin/sh -c #(nop) USER [root]	0 B	
481c174e3d0d	3 months ago	/bin/sh -c #(nop) MAINTAINER Marek Goldmann <	0 B	
722c8bdf4d33	5 months ago	/bin/sh -c #(nop) USER [jboss]	0 B	
88389be452f6	5 months ago	/bin/sh -c #(nop) WORKDIR /opt/jboss	0 B	
e5351df2706d	5 months ago	/bin/sh -c groupadd -r jboss -g 1000 && usera	294.8 kB	
e3ff94cddd8b	5 months ago	/bin/sh -c yum update -y && yum -y install xm	57.58 MB	
92009d6c8aff	5 months ago	/bin/sh -c #(nop) MAINTAINER Marek Goldmann <	0 B	
7ed0005a64f9	5 months ago	/bin/sh -c #(nop) CMD ["/bin/bash"]	0 B	
4d1ec7e2b1dd	5 months ago	/bin/sh -c #(nop) ADD file:82835f82606420c764	172.2 MB	
a2c33fe967de	7 months ago	/bin/sh -c #(nop) MAINTAINER The CentOS Proje	0 B	

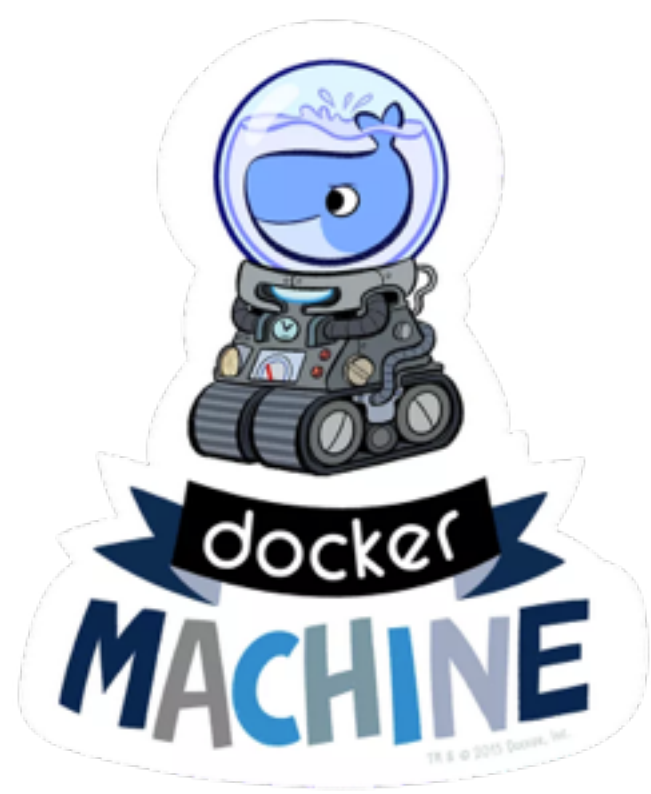


Docker Machine

- Create Docker Host on computer or cloud provider

```
docker-machine create --driver=virtualbox myhost
```

- Configure Docker client to talk to host
 - Create and pull images
 - Start, stop, restart containers
 - Upgrade Docker
- Not recommended for production yet

Docker Machine Providers

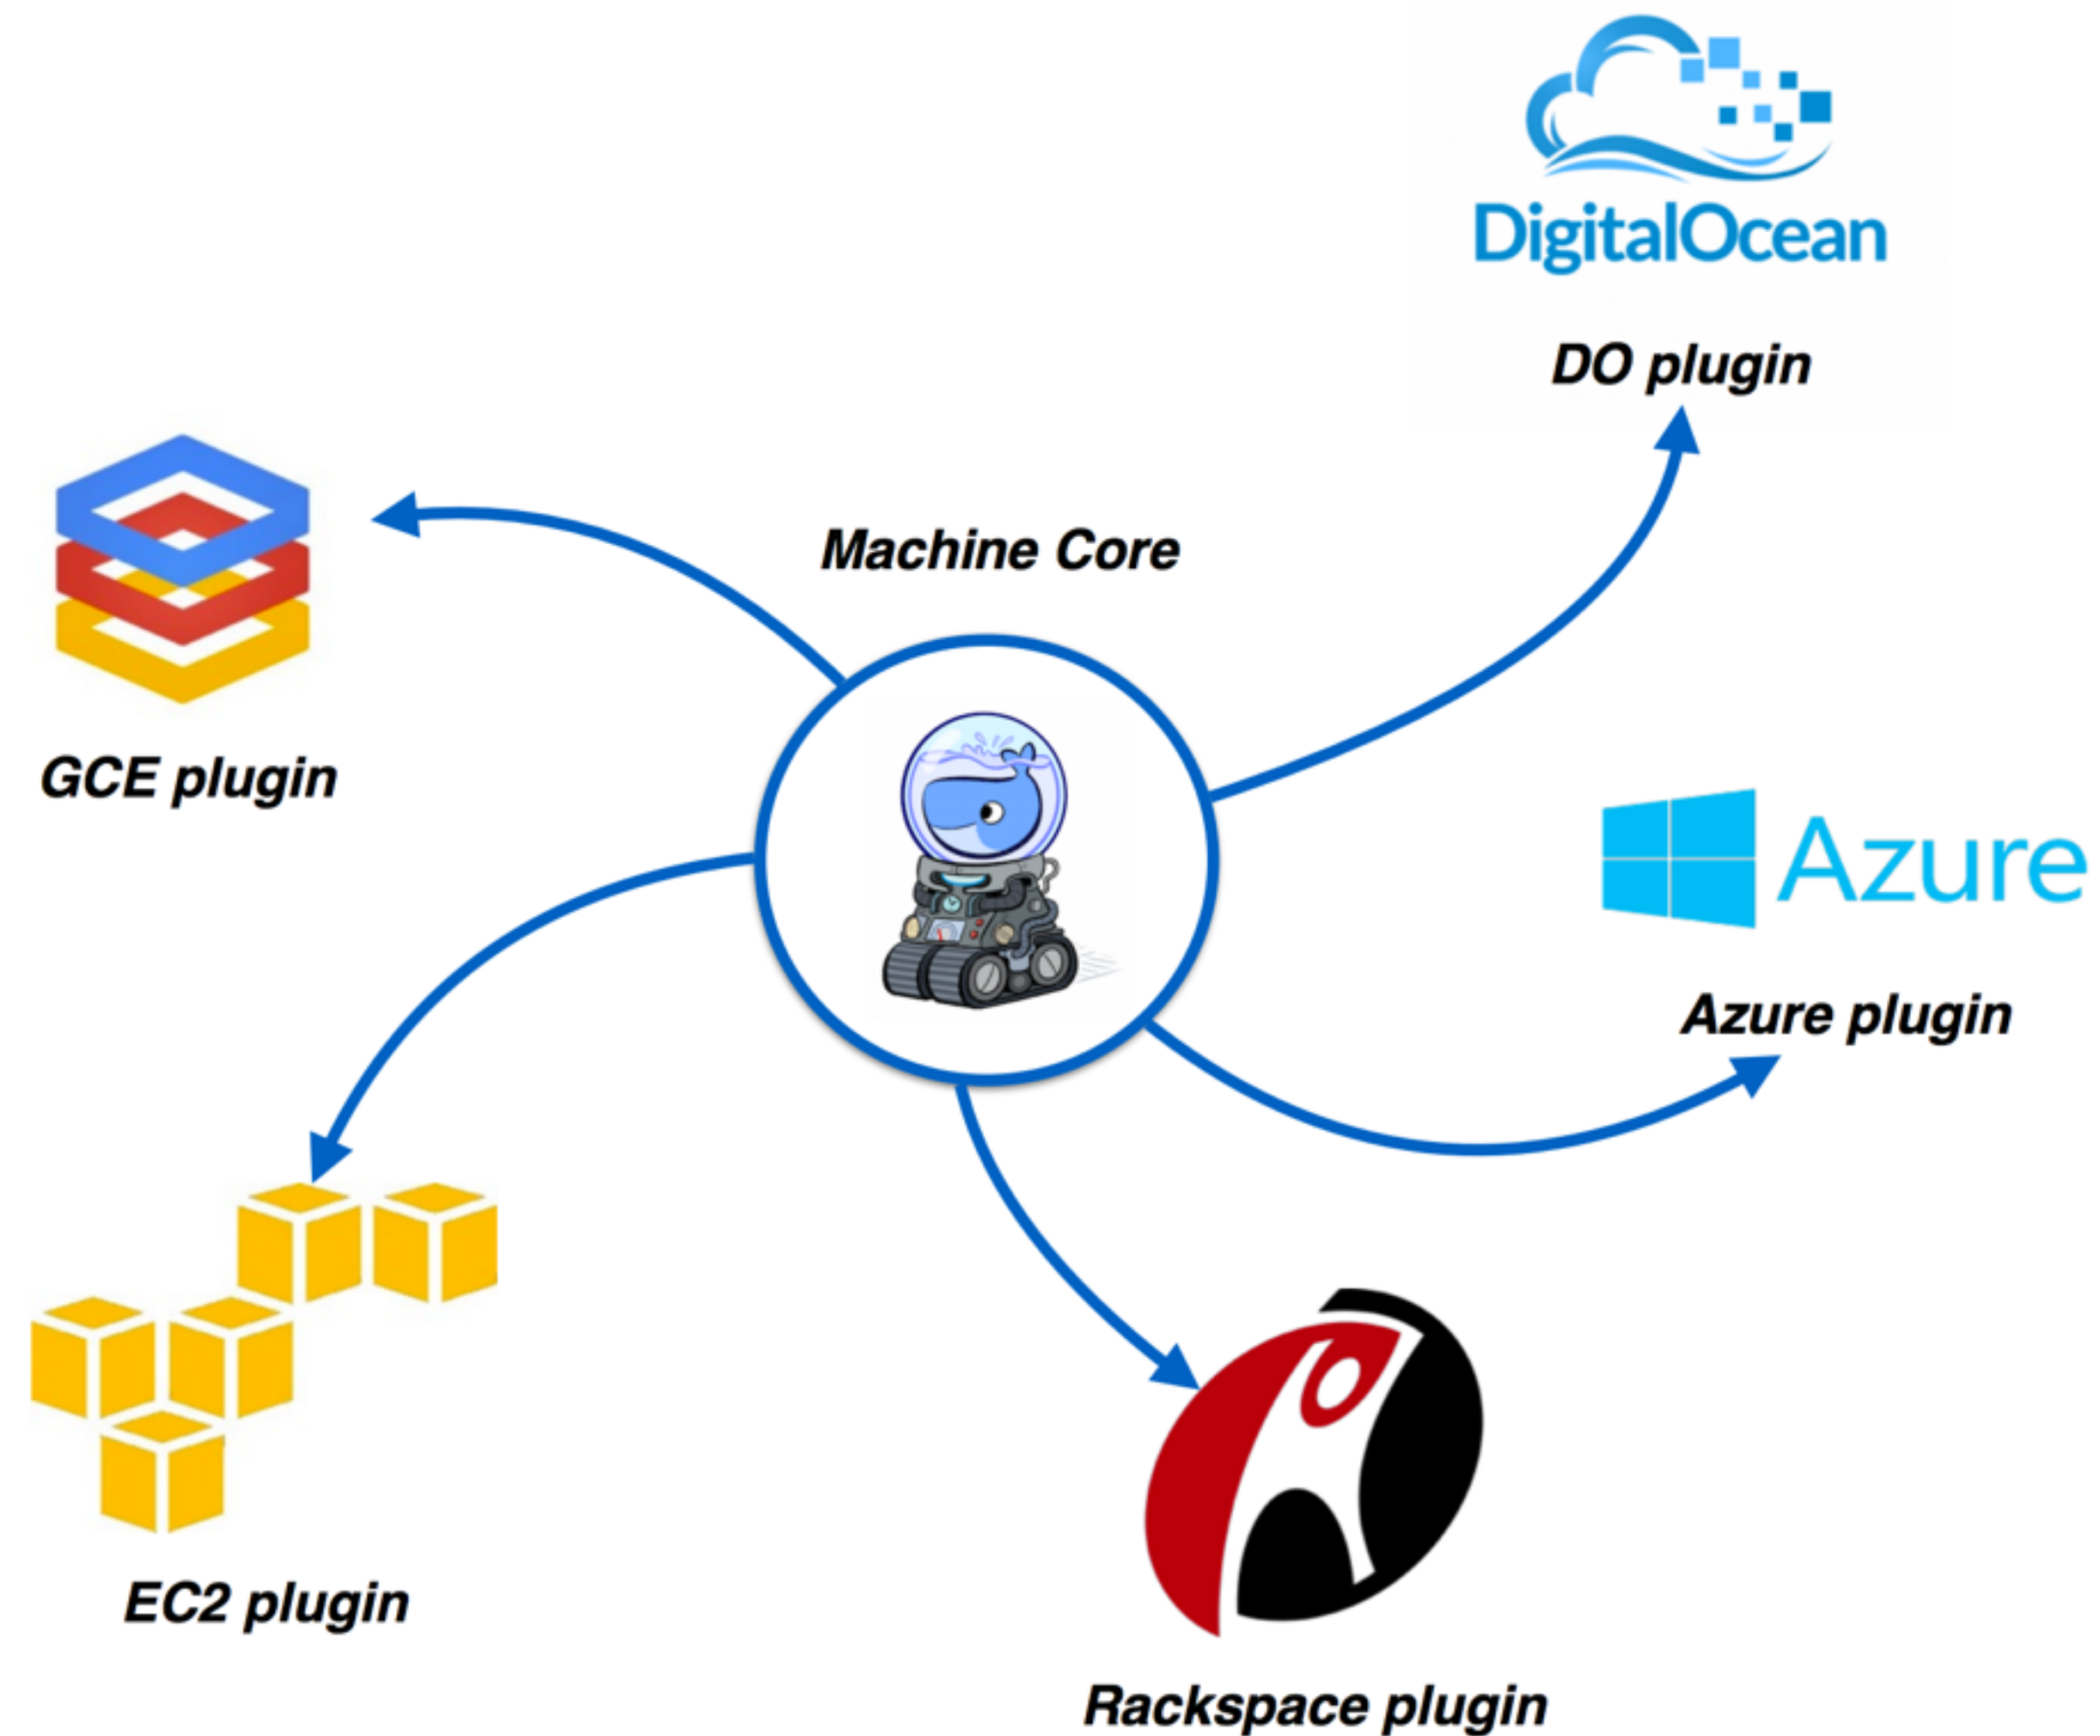

boot2docker

- Migrate to Docker Machine

```
docker-machine  
create -d virtualbox  
--virtualbox-import-boot2docker-vm  
boot2docker-vm docker-vm
```


boot2docker	docker-machine	description
init	create	Creates a new docker host.
up	start	Starts a stopped machine.
ssh	ssh	Runs a command or interactive ssh session on the machine.
save	-	Not applicable.
down	stop	Stops a running machine.
poweroff	stop	Stops a running machine.
reset	restart	Restarts a running machine.
config	inspect	Prints machine configuration details.
status	ls	Lists all machines and their status.
info	inspect	Displays a machine's details.
ip	ip	Displays the machine's ip address.
shellinit	env	Displays shell commands needed to configure your shell to interact with a machine
delete	rm	Removes a machine.
download	-	Not applicable.
upgrade	upgrade	Upgrades a machine's Docker client to the latest stable release.

Docker Toolbox

- Docker Client 1.10.0
- Docker Machine 0.6.0
- Docker Compose 1.6.0
- Docker Kitematic 0.10.0
- Boot2Docker ISO 1.10.0
- Virtualbox 5.0.14








Docker Compose - One Service

```
mycouchbase:  
  name: mycouchbase  
  image: couchbase/server  
  volumes:  
    - ~/couchbase:/opt/couchbase/var  
  ports:  
    - 8091:8091  
    - 8092:8092  
    - 8093:8093  
    - 11210:11210
```




```
docker run
--name mycouchbase
-p 8091:8091
-p 8093:8093
-p 11210:11210
-v ~/couchbase:/opt/couchbase/var
-d
couchbase
```

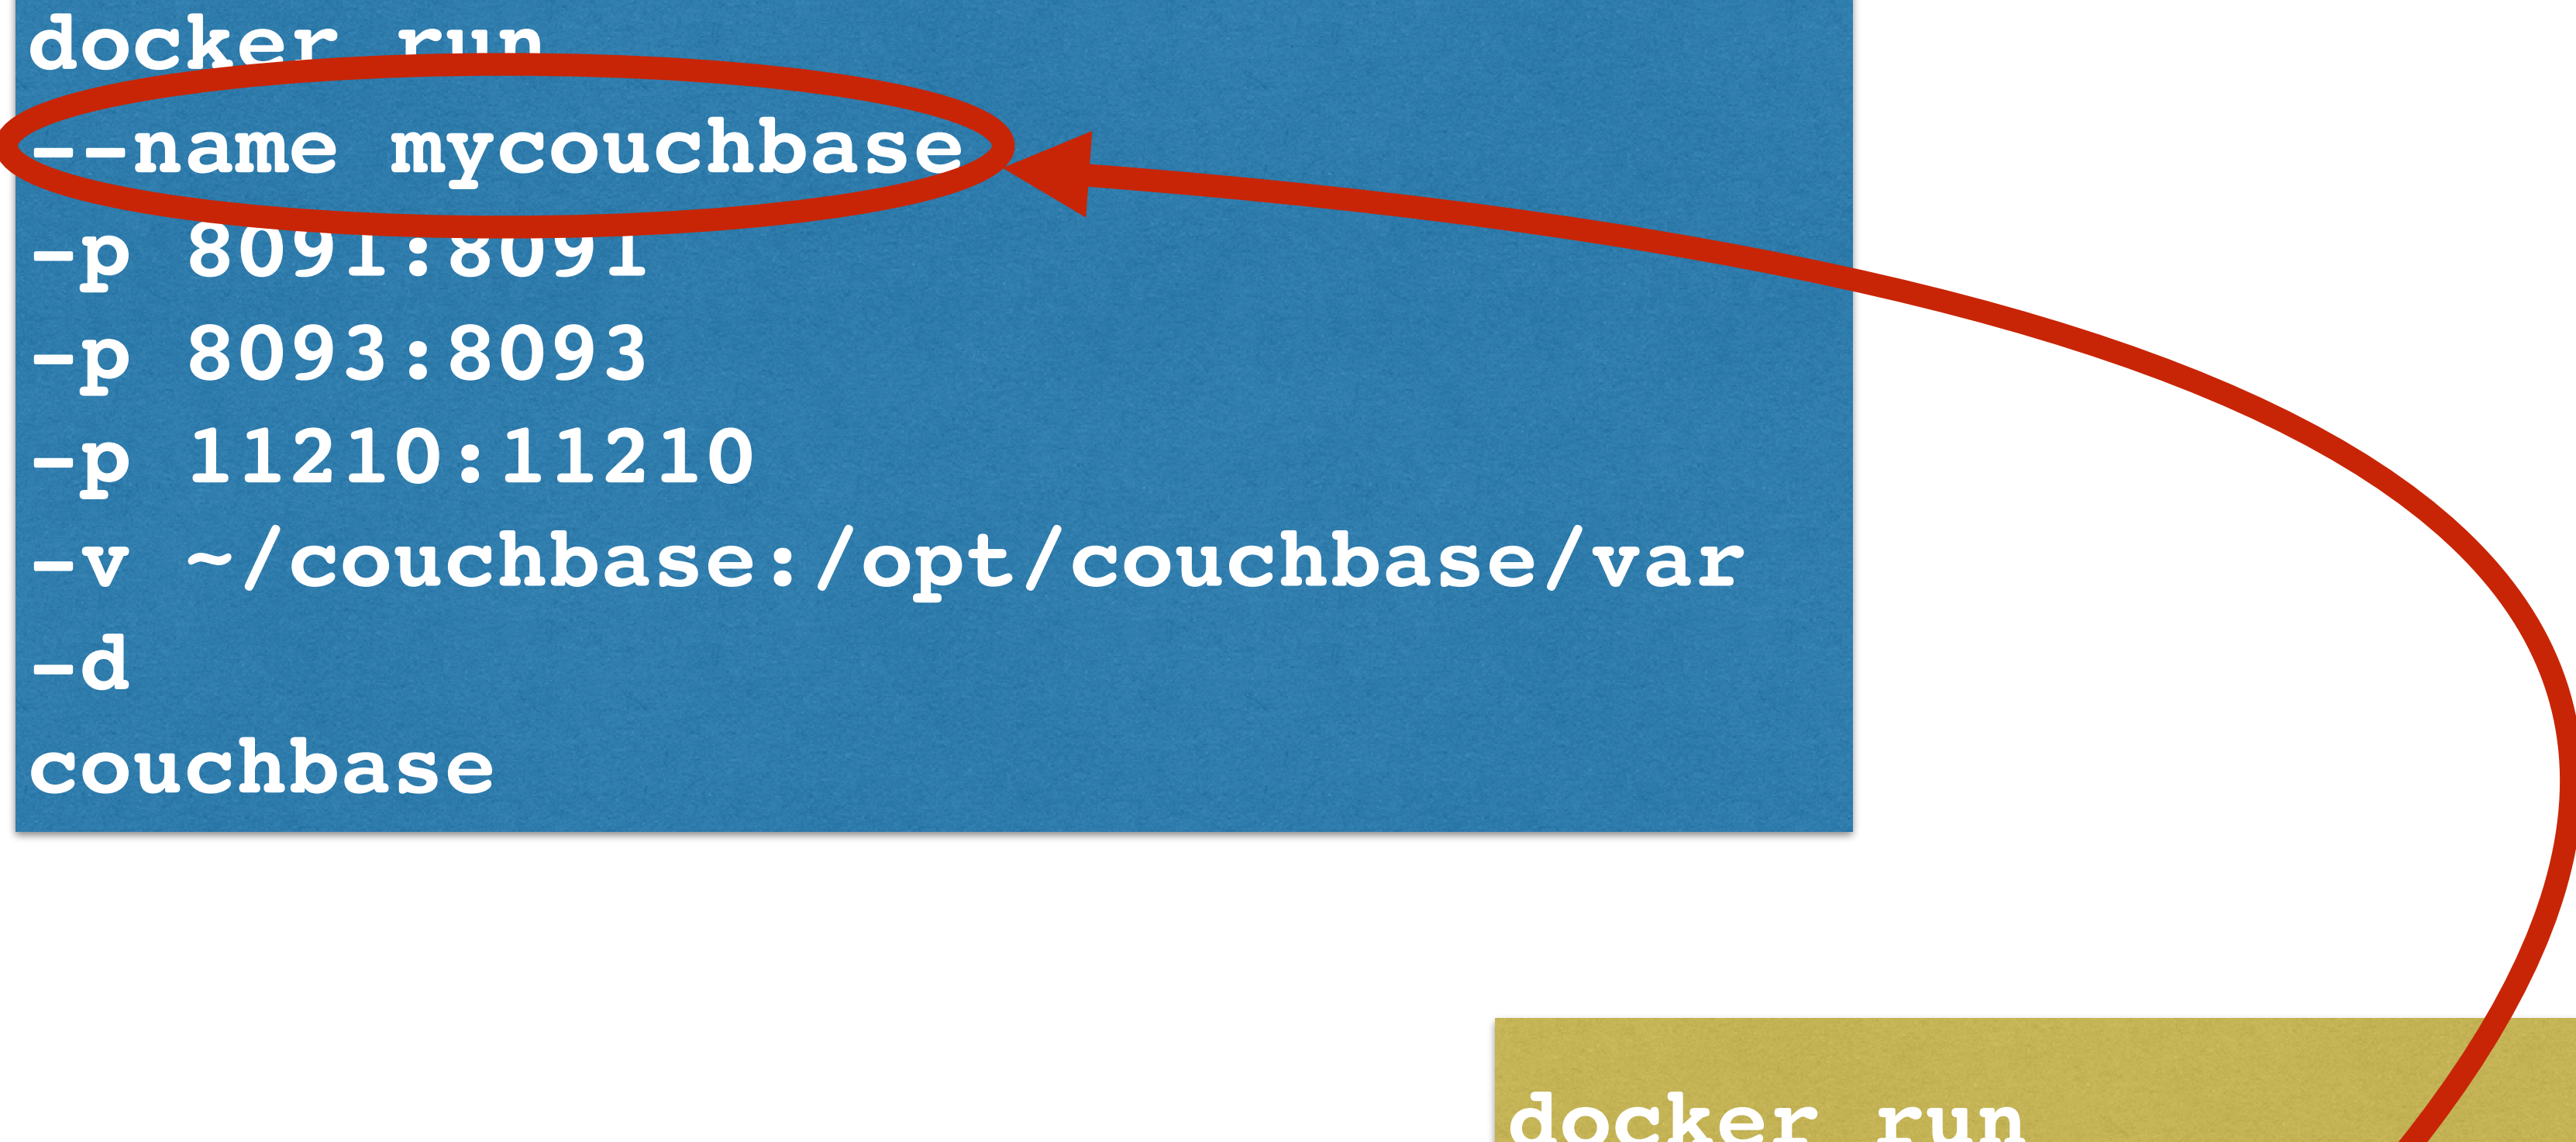

```
docker run
--name mywildfly
--link mycouchbase:cb
-p 8080:8080
-d
arungupta/wildfly-admin
```


Docker Compose - Two Services

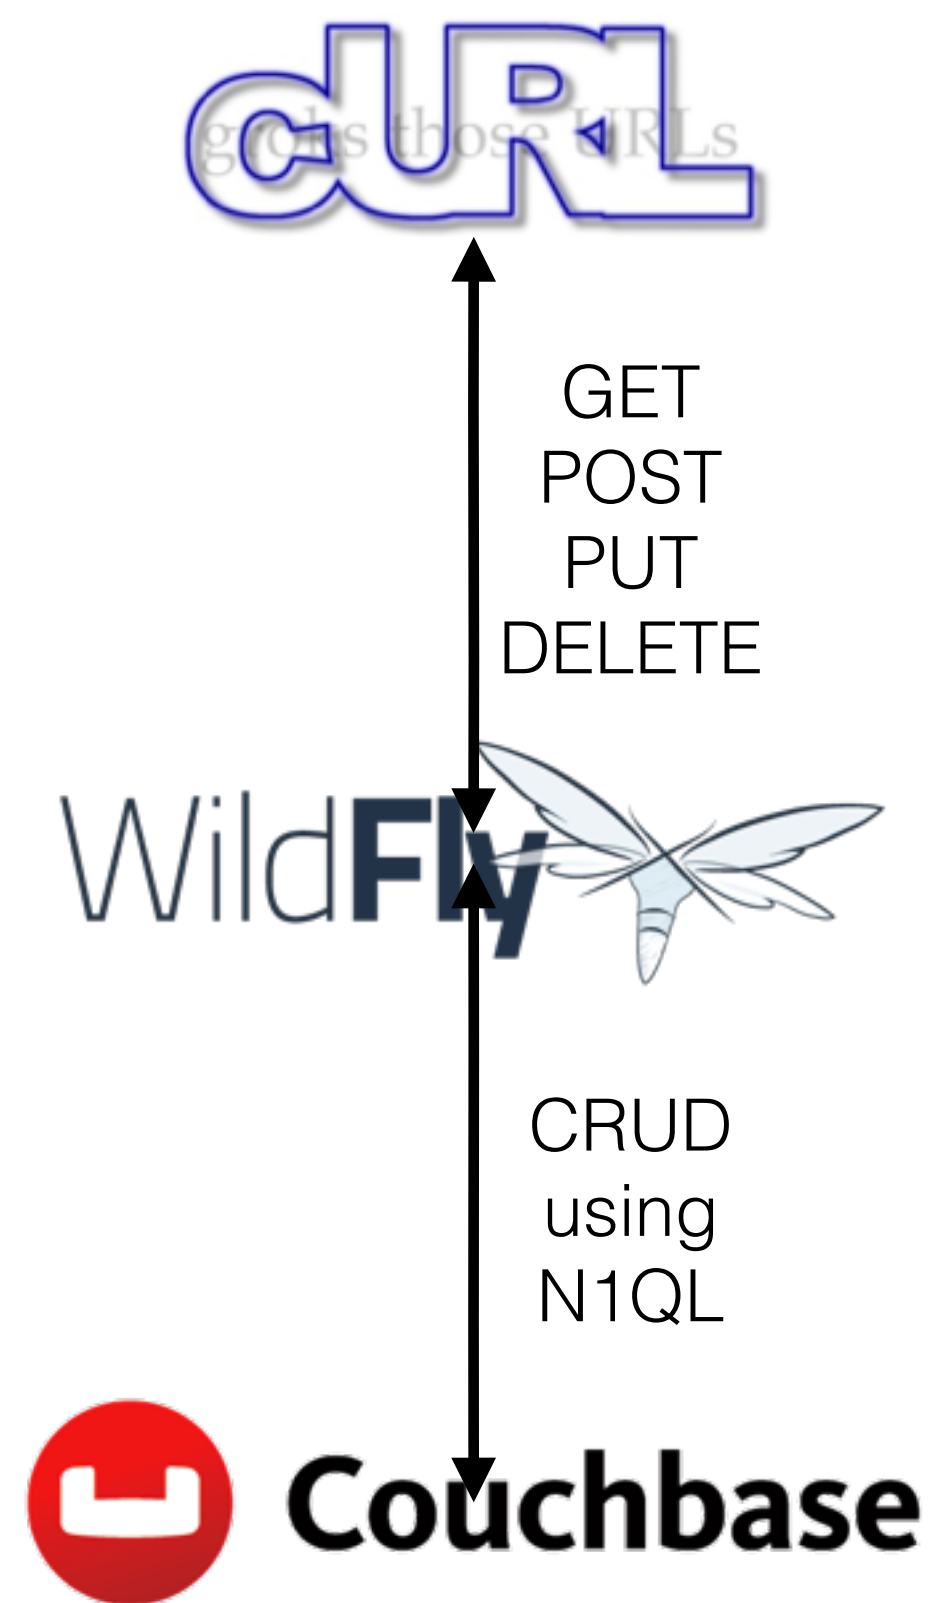



Docker Compose

- Defining and running multi-container applications
- Configuration defined in one or more files
 - `docker-compose.yml` (default)
 - `docker-compose.override.yml` (default)
 - Multiple files specified using `-f`
 - All paths relative to base configuration file
- Great for dev, staging, and CI

Docker Compose - Two Services

```
mycouchbase:  
  image: couchbase/server  
  ports:  
    - 8091:8091  
    - 8092:8092  
    - 8093:8093  
    - 11210:11210  
mywildfly:  
  image: arungupta/wildfly-admin  
  links:  
    - mycouchbase:cb  
  ports:  
    - 8080:8080  
    - 9990:9990
```



Docker Compose - Links

```
CouchbaseCluster.create(System.getenv("DB_PORT_8091_TCP_ADDR"));
```


Docker Compose - Couchbase Cluster

```
couchbase1:  
  image: couchbase/server  
  volumes:  
    - ~/couchbase/node1:/opt/couchbase/var  
couchbase2:  
  image: couchbase/server  
  volumes:  
    - ~/couchbase/node2:/opt/couchbase/var  
couchbase3:  
  image: couchbase/server  
  volumes:  
    - ~/couchbase/node3:/opt/couchbase/var  
ports:  
  - 8091:8091  
  - 8092:8092  
  - 8093:8093  
  - 11210:11210
```

Docker Machine



Overriding Services in Docker Compose

```
mywildfly:  
  image: jboss/wildfly  
  ports:  
    - 8080:8080
```

docker-compose.yml

```
mywildfly:  
  ports:  
    - 9080:8080
```

docker-compose.override.yml

```
docker-compose up -d
```


Dev/Prod with Compose

```
mycouchbase:
  container_name: "db-dev"
  image: couchbase/server
  ports:
    - . . .
mywildfly:
  image: arungupta/wildfly-couchbase-javaee7
  environment:
    - COUCHBASE_URI=db-dev:8093
  ports:
    - 8080:8080
```

docker-compose.yml

```
docker-compose up -d
```

```
mywildfly:
  environment:
    - COUCHBASE_URI=db-prod:8093
  ports:
    - 80:8080
mycouchbase:
  container_name: "db-prod"
```


production.yml

```
docker-compose up
-f docker-compose.yml
-f production.yml
-d
```


Compose in Production

- Primarily aimed at development and testing environments
- May be for smaller deployments
- Not suitable for larger deployments

Multi-host Networking

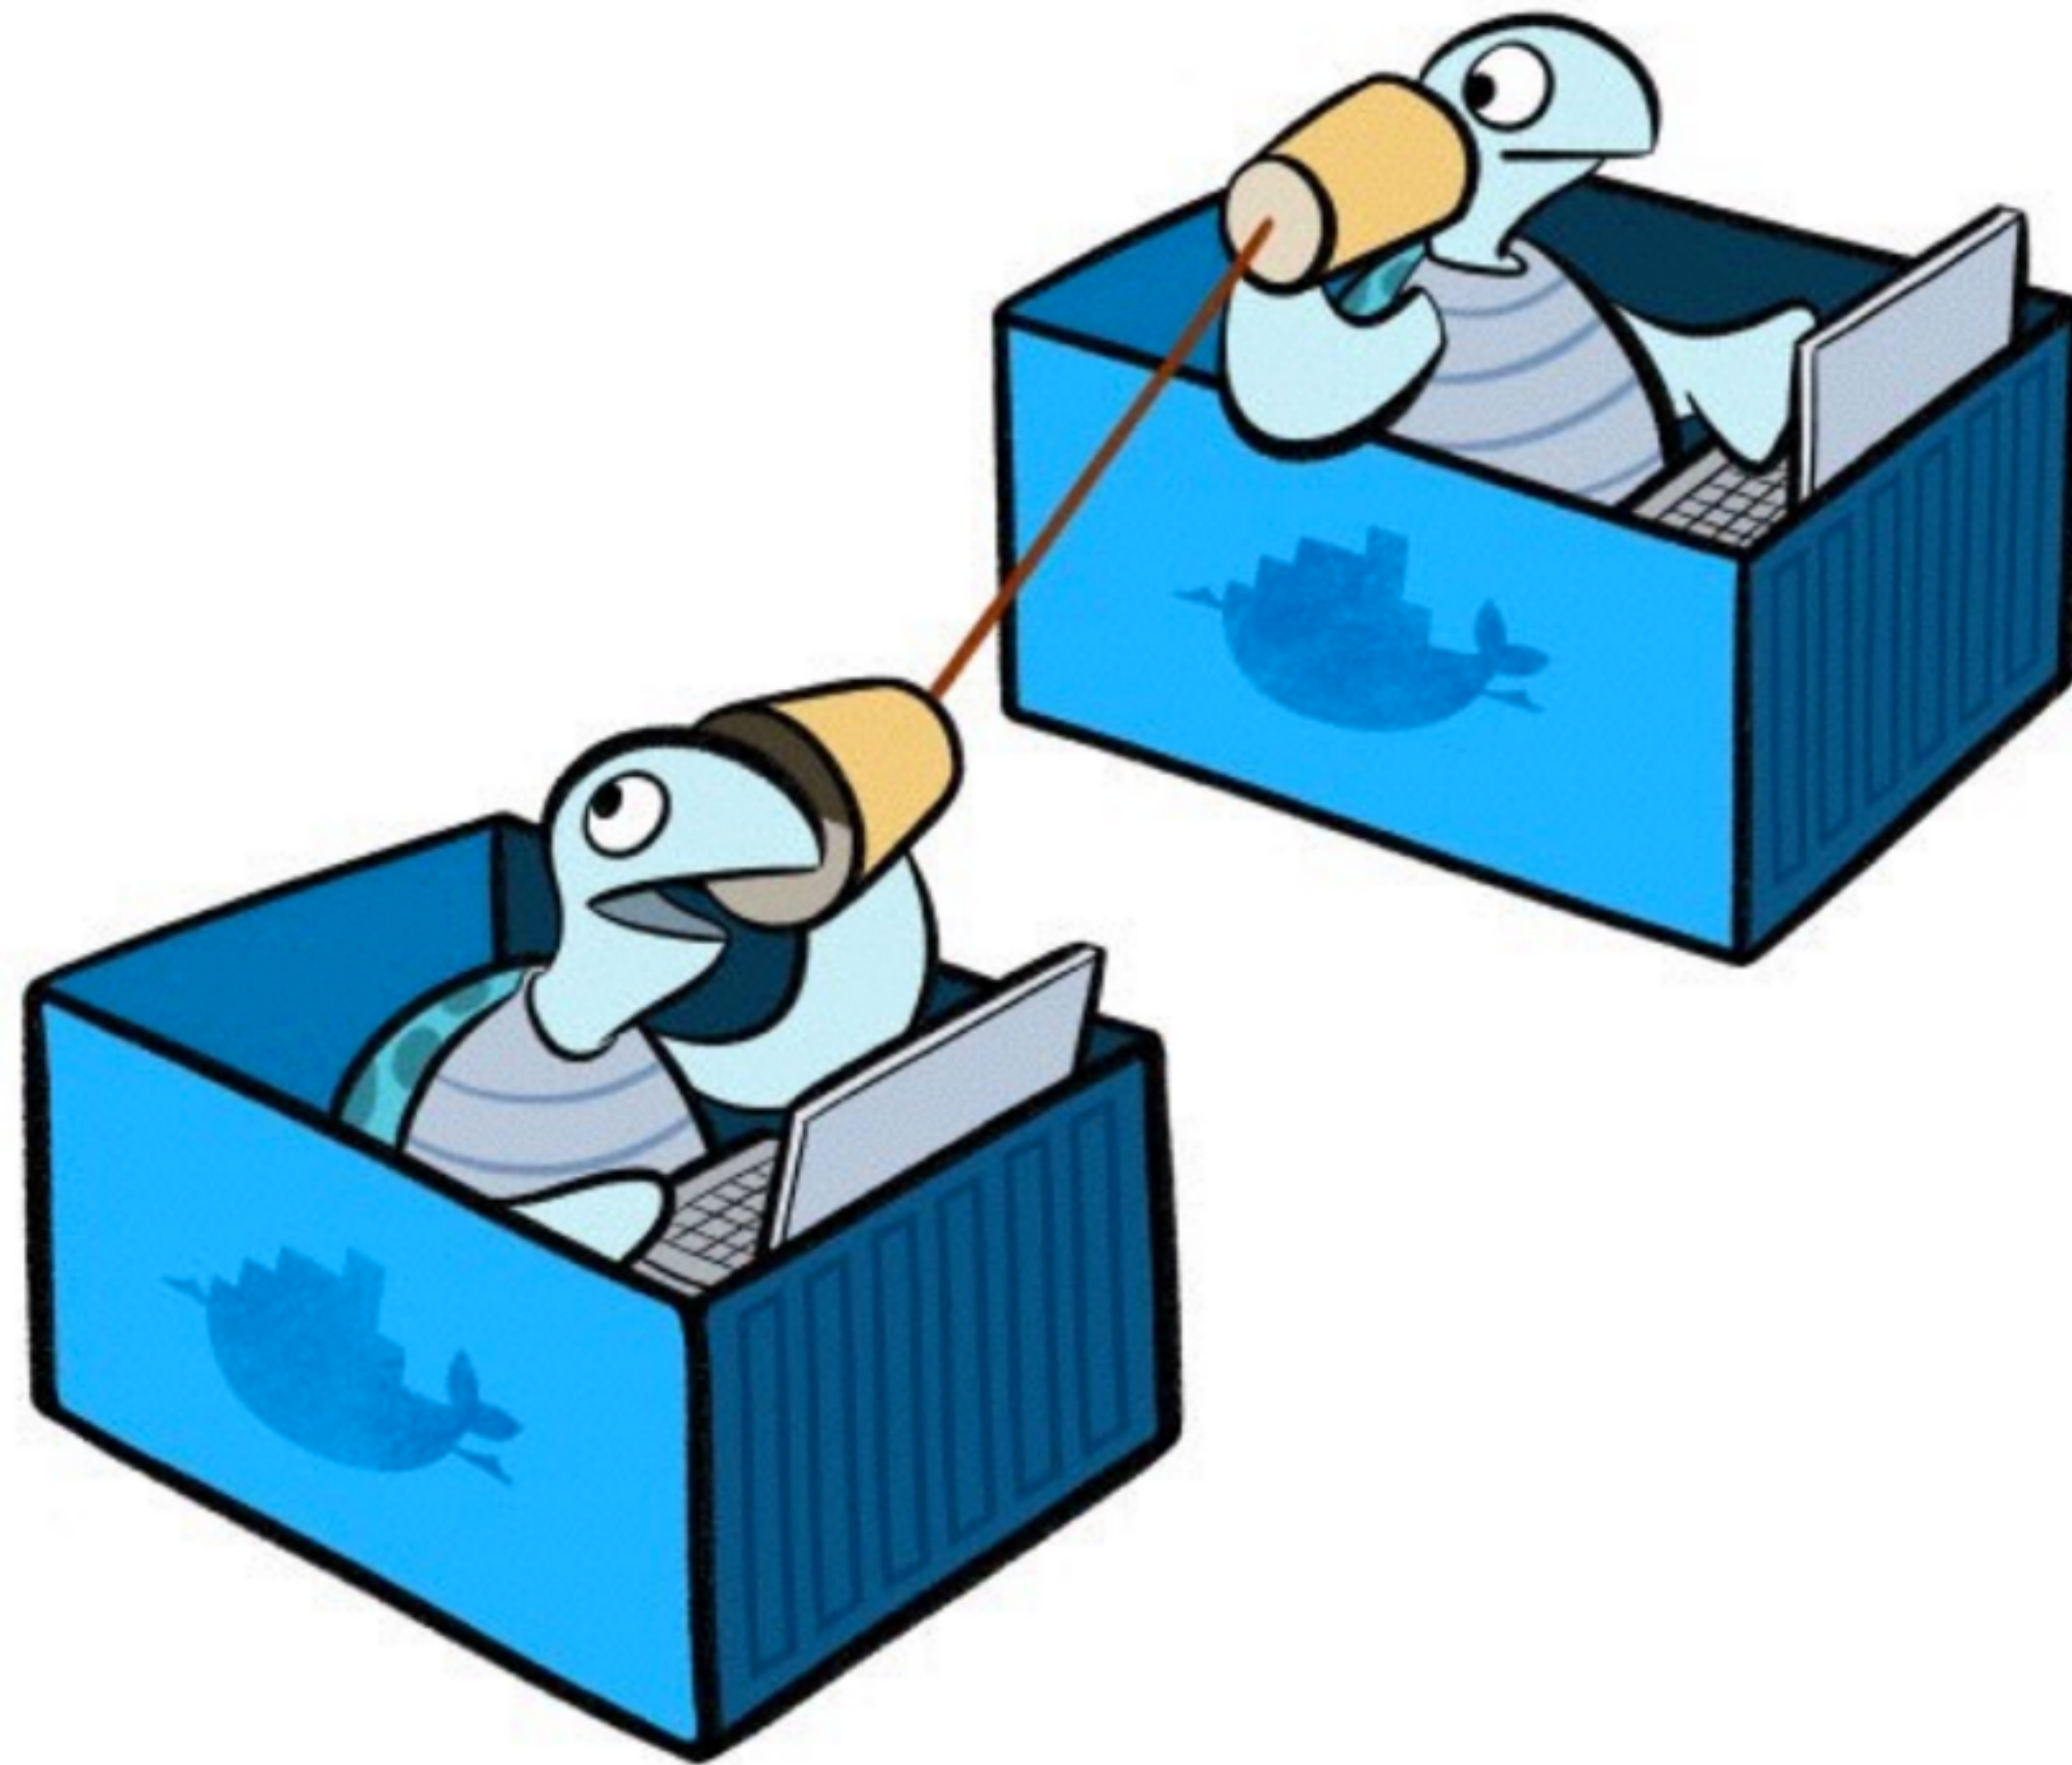

Default Networks

```
docker network ls
NETWORK ID          NAME                DRIVER
8cf651cafbeff      bridge             bridge
14e63204639e       none              null
96901337c96f       host              host
```

Network Name	Purpose
bridge	Default network that containers connect to
none	Container-specific networking stack
host	Adds container on hosts networking stack

Multi-host Networking

- Create virtual networks and attach containers
- **Bridge** network span single host
- **Overlay** network spans multiple hosts
 - Uses `libnetwork` (built-in VXLAN-based overlay network driver) and Docker's `libkv`
- Works with Swarm and Compose
 - ~~Experimental in Compose~~
- Pluggable: Calico, Cisco, Weave, . . .

Networking vs Links

- Connect containers to each other
- Across different physical or virtual hosts
- Containers can be easily stopped, started and restarted
 - Connection to other containers not disturbed
- Can be created in any order

```
mycouchbase:
  image: couchbase/server
  ports:
    - 8091:8091
    - 8092:8092
    - 8093:8093
    - 11210:11210
mywildfly:
  image: arungupta/wildfly-admin
  links:
    - mycouchbase:cb
  ports:
    - 8080:8080
    - 9990:9990
```

Links

```
mycouchbase:
  container_name: "db"
  image: couchbase/server
  ports:
    - 8091:8091
    - 8092:8092
    - 8093:8093
    - 11210:11210
mywildfly:
  image: arungupta/wildfly-admin
  environment:
    - COUCHBASE_URI=db
  ports:
    - 8080:8080
    - 9990:9990
```

Networking

Networking - Application Code

```
CouchbaseCluster.create(System.getenv("DB_PORT_8091_TCP_ADDR"));
```

Links

```
CouchbaseCluster.create(System.getenv("COUCHBASE_URI"));
```


Networking



Docker Swarm

- Native clustering for Docker
- Provides a unified interface to a pool of Docker hosts
- Fully integrated with Machine and Compose
- Serves the standard Docker API
- 1.1 - Ready for production
 - Reschedule containers when a node fails (experimental)
 - Better node management

Stress tested on 1000 EC2 nodes, ~30k containers

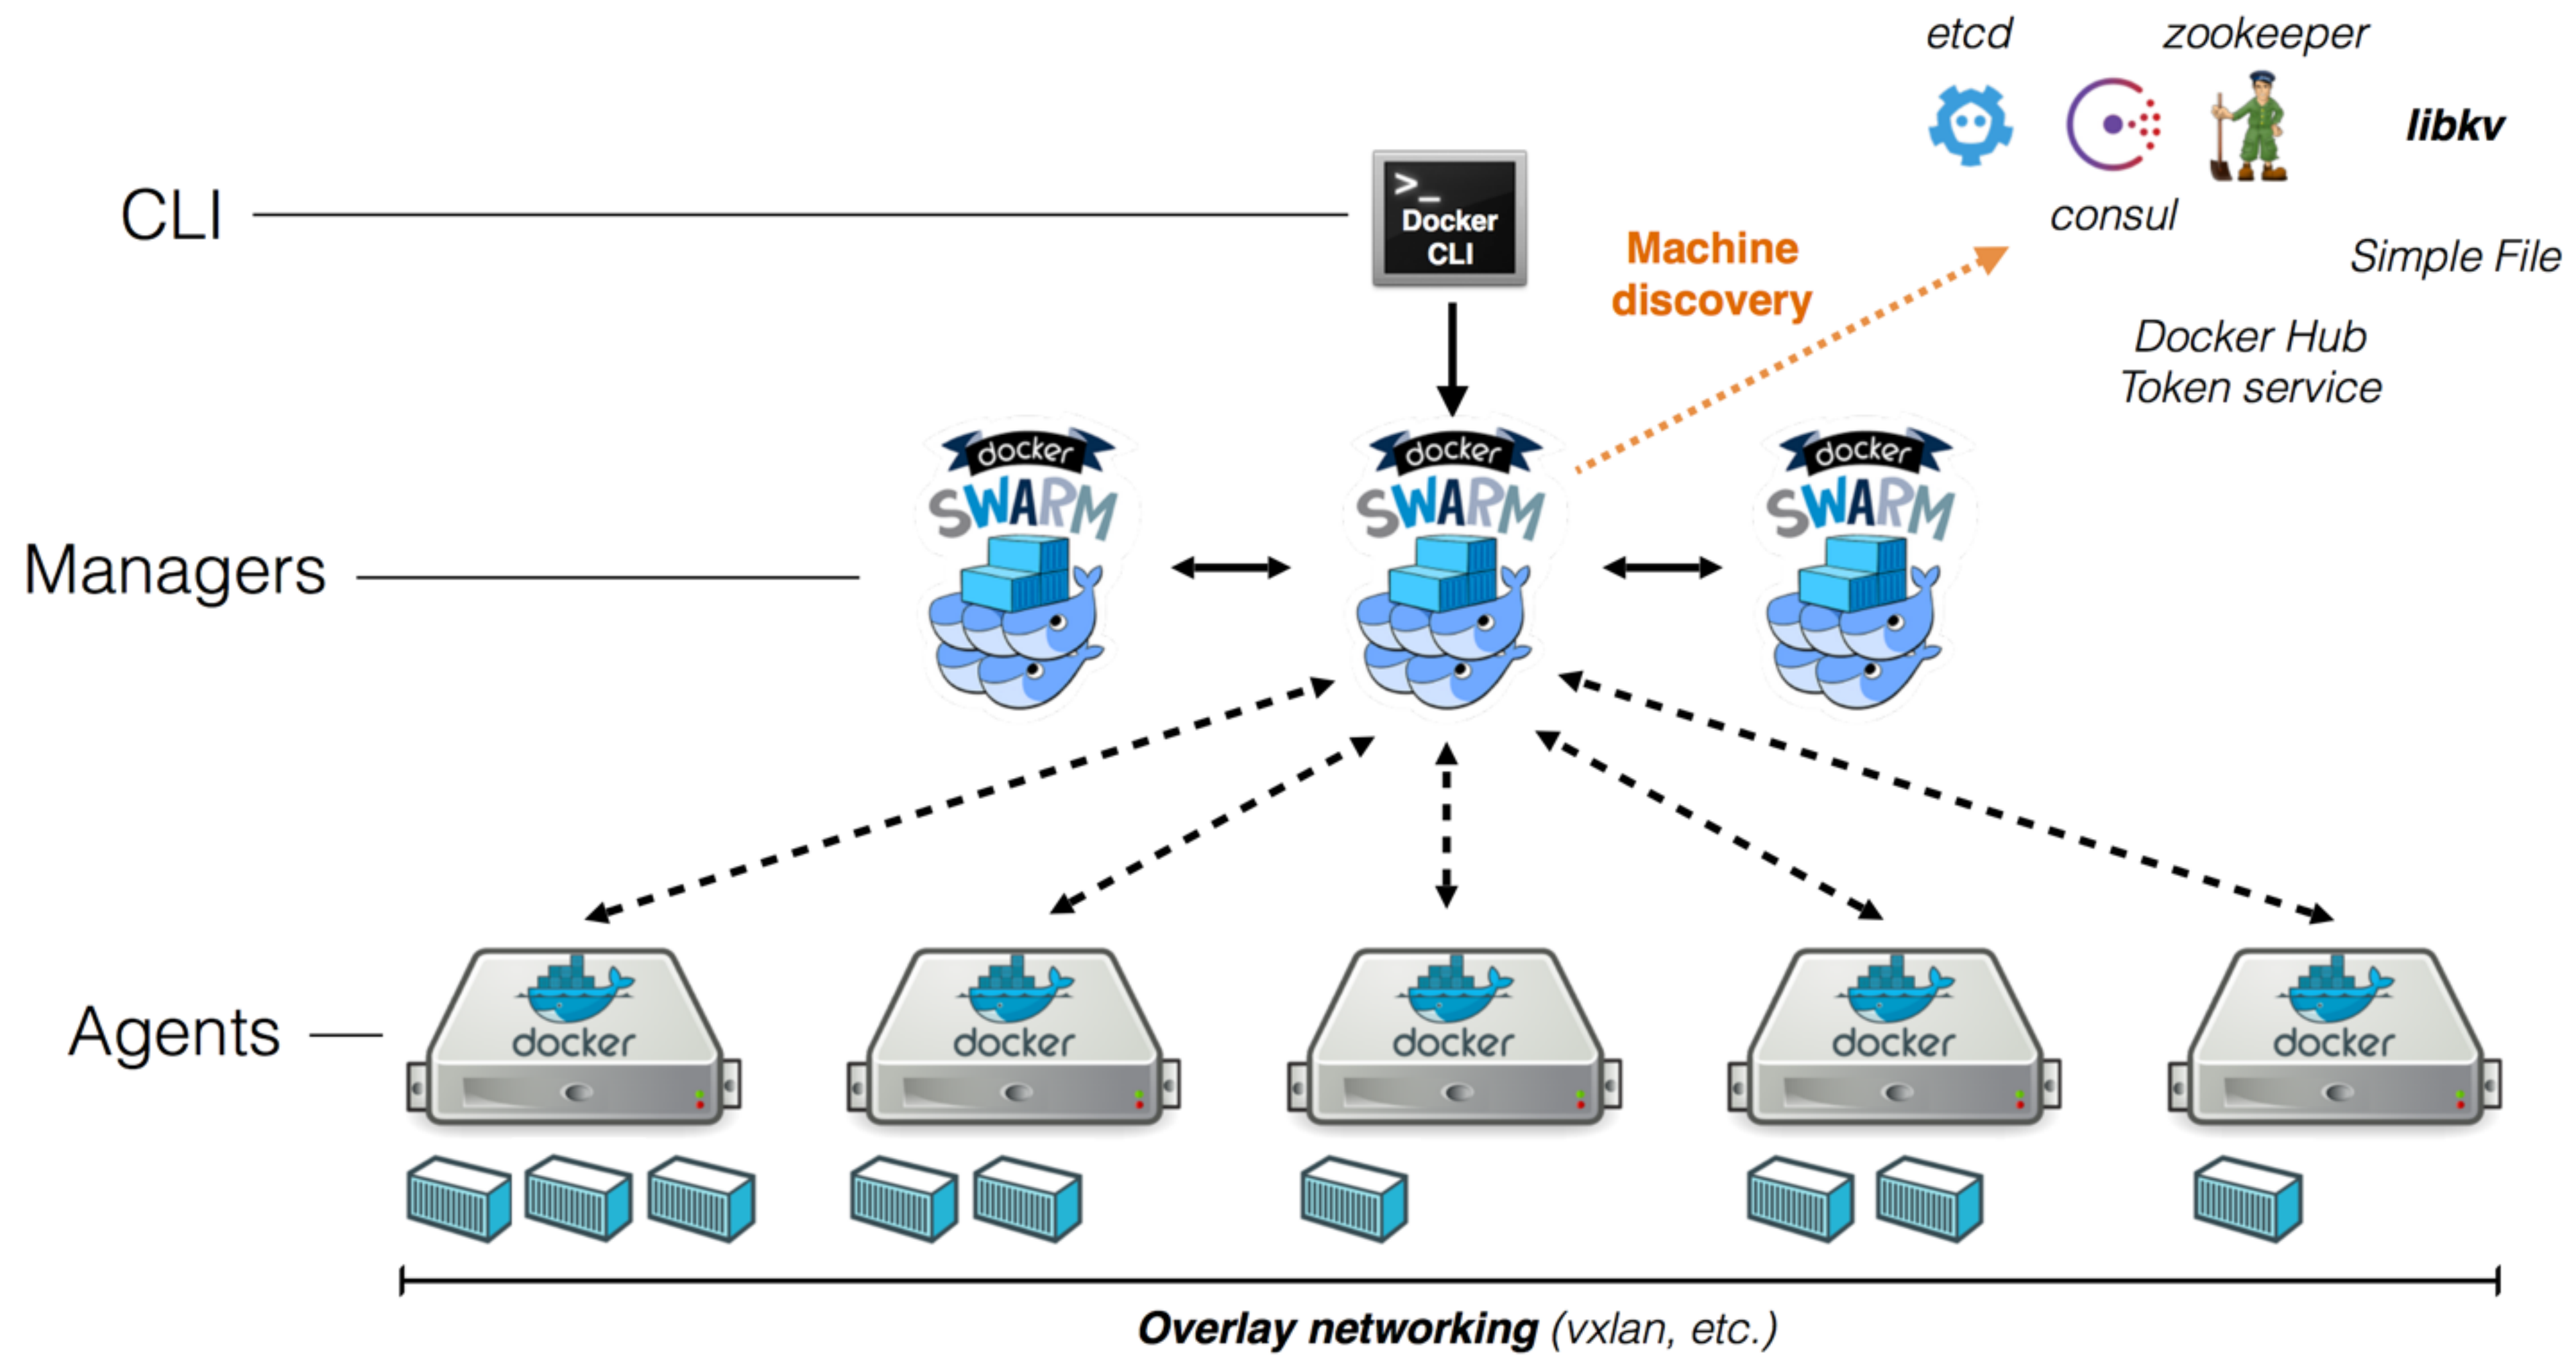



Master High Availability

- Handle the failover of a manager instance
- **Primary** manager, multiple **replica** instances
- Requests to replica are proxied to primary
- `docker run swarm manage`
 - `--replication`: Enable Swarm manager replication
 - `--replication-ttl "30s"`: Leader lock release time on failure
 - `--advertise, --addr`: Address of the swarm manager joining the cluster



Scheduling Backends

- Based on CPU (`-c`), RAM (`-m`), number of containers
- `docker machine create --strategy <value>`
 - `spread` (default): node with least number of running containers
 - `binpack`: node with most number of running containers
 - `random`: mostly for debugging
- API for pluggable backends (e.g. Mesos) coming

Limiting CPU resources

```
docker run --help | grep cpu
```

```
--cpu-shares=0
```

CPU shares (relative weight)

```
--cpu-period=0
```

Limit CPU CFS (Completely Fair Scheduler) period

```
--cpu-quota=0
```

Limit CPU CFS (Completely Fair Scheduler) quota

```
--cpuset-cpus=
```

CPUs in which to allow execution (0-3, 0,1)

```
--cpuset-mems=
```


MEMs in which to allow execution (0-3, 0,1)

-c=1024

-c=512

-c=512

Machine + Swarm + Compose

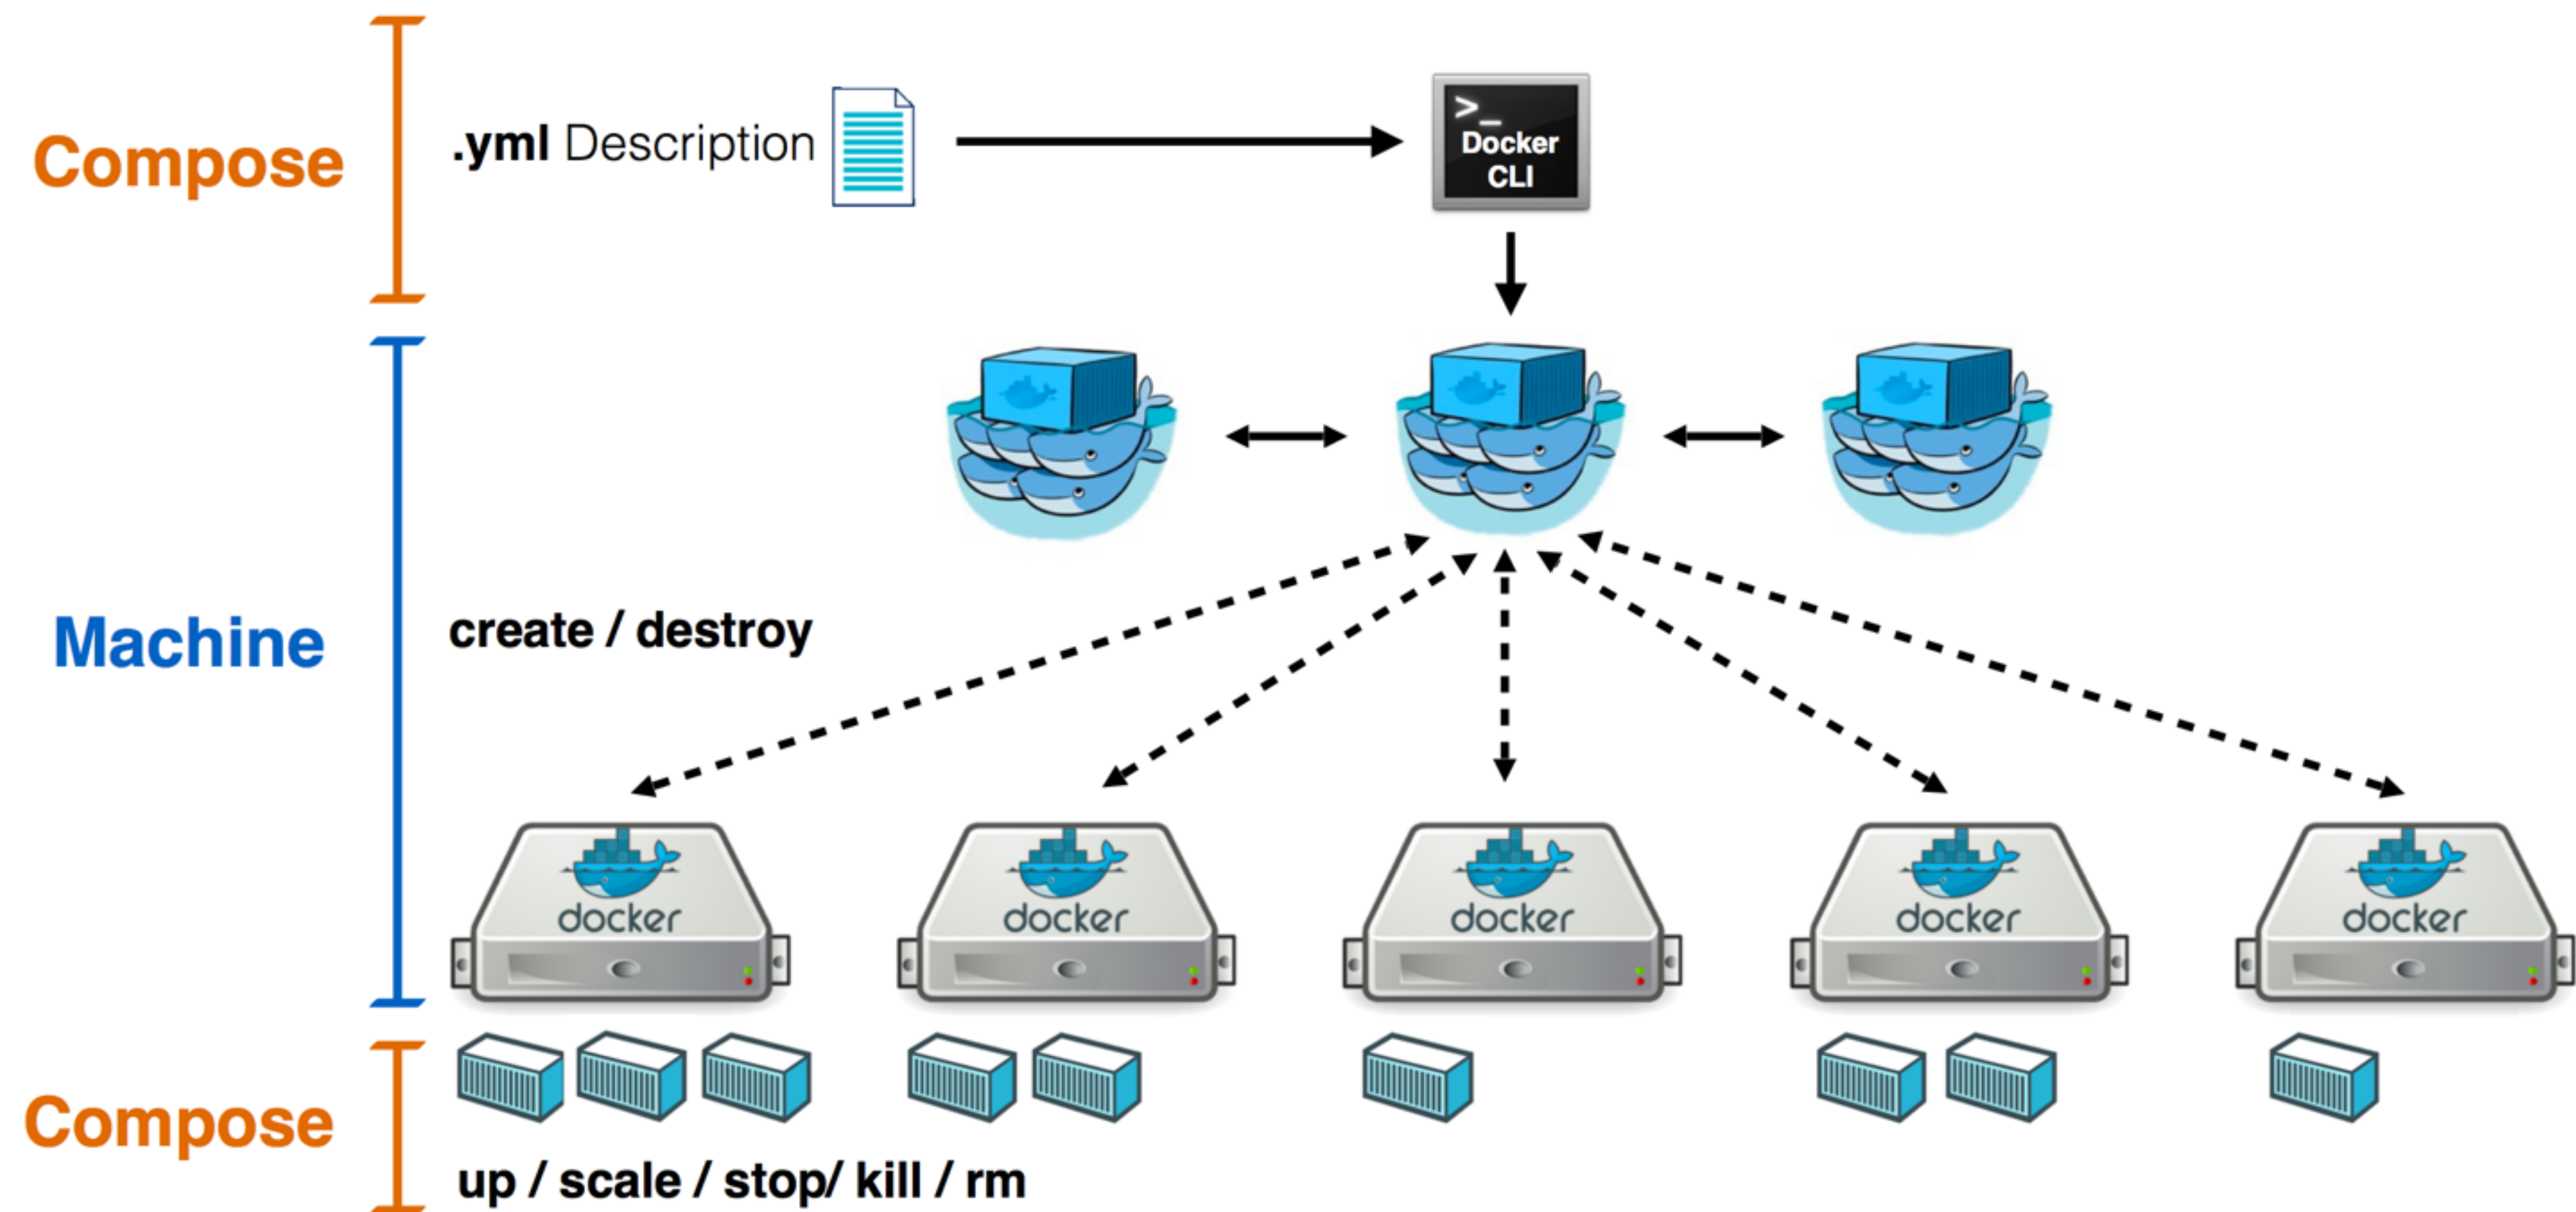

Persistent Storage

- Data volumes - used to persist data independent of container's lifecycle
- Multiple plugins: Flocker, Ceph, . . .

```
docker volume --help
```

```
Usage: docker volume [OPTIONS] [COMMAND]
```

```
Manage Docker volumes
```

```
Commands:
```

```
create
```

```
Create a volume
```

```
inspect
```

```
Return low-level information on a volume
```

```
ls
```

```
List volumes
```

```
rm
```

```
Remove a volume
```

Persistent Storage

Create a volume

```
docker volume create --name=data data
```

Run a container with the volume

```
docker run -it -v data:/opt/couchbase/var couchbase
```


docker network

```
docker network --help
```

```
Usage: docker network [OPTIONS] COMMAND [OPTIONS]
```

Commands:

disconnect	Disconnect container from a network
inspect	Display detailed network information
ls	List all networks
rm	Remove a network
create	Create a network
connect	Connect container to a network

Docker Compose and Networking


- `docker network ls`


NETWORK ID	NAME	DRIVER
1d4d4152b99a	bridge	bridge
8396171e6bbc	none	null
8b50dda5fe61	host	host


- `docker-compose up -d`


- `docker network ls`


NETWORK ID	NAME	DRIVER
1d4d4152b99a	bridge	bridge
8396171e6bbc	none	null
8b50dda5fe61	host	host
b1770955e5aa	wildflycouchbasejavaee7	bridge

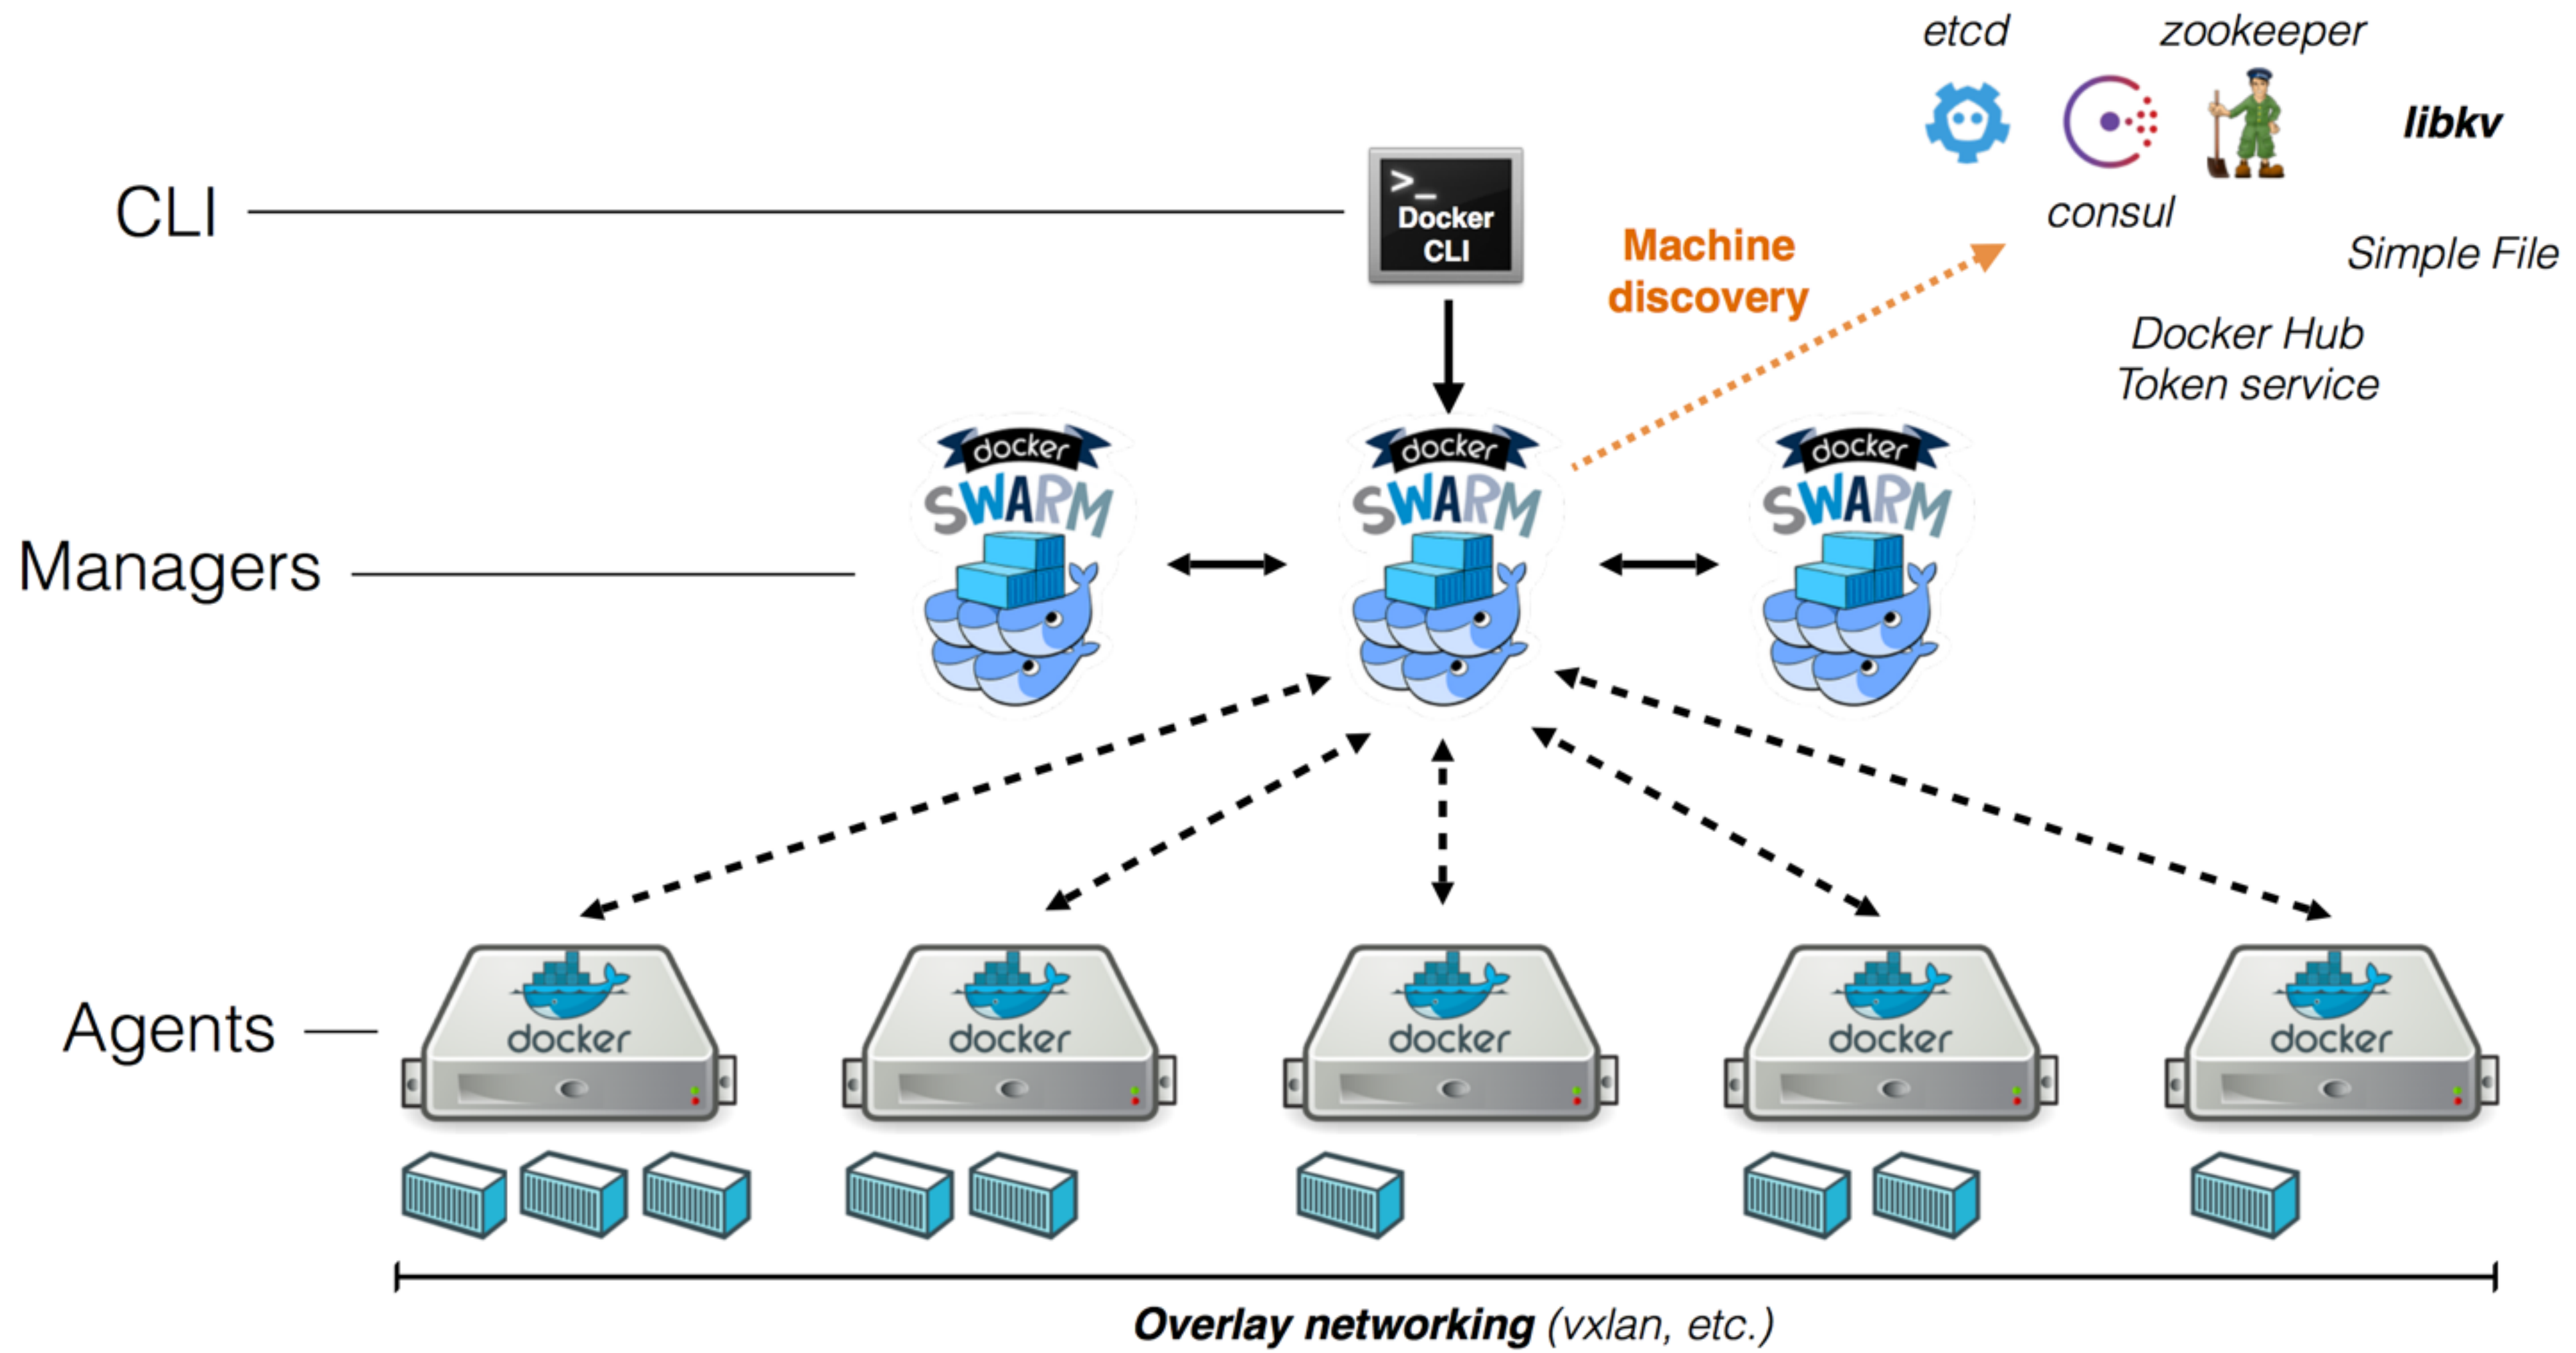


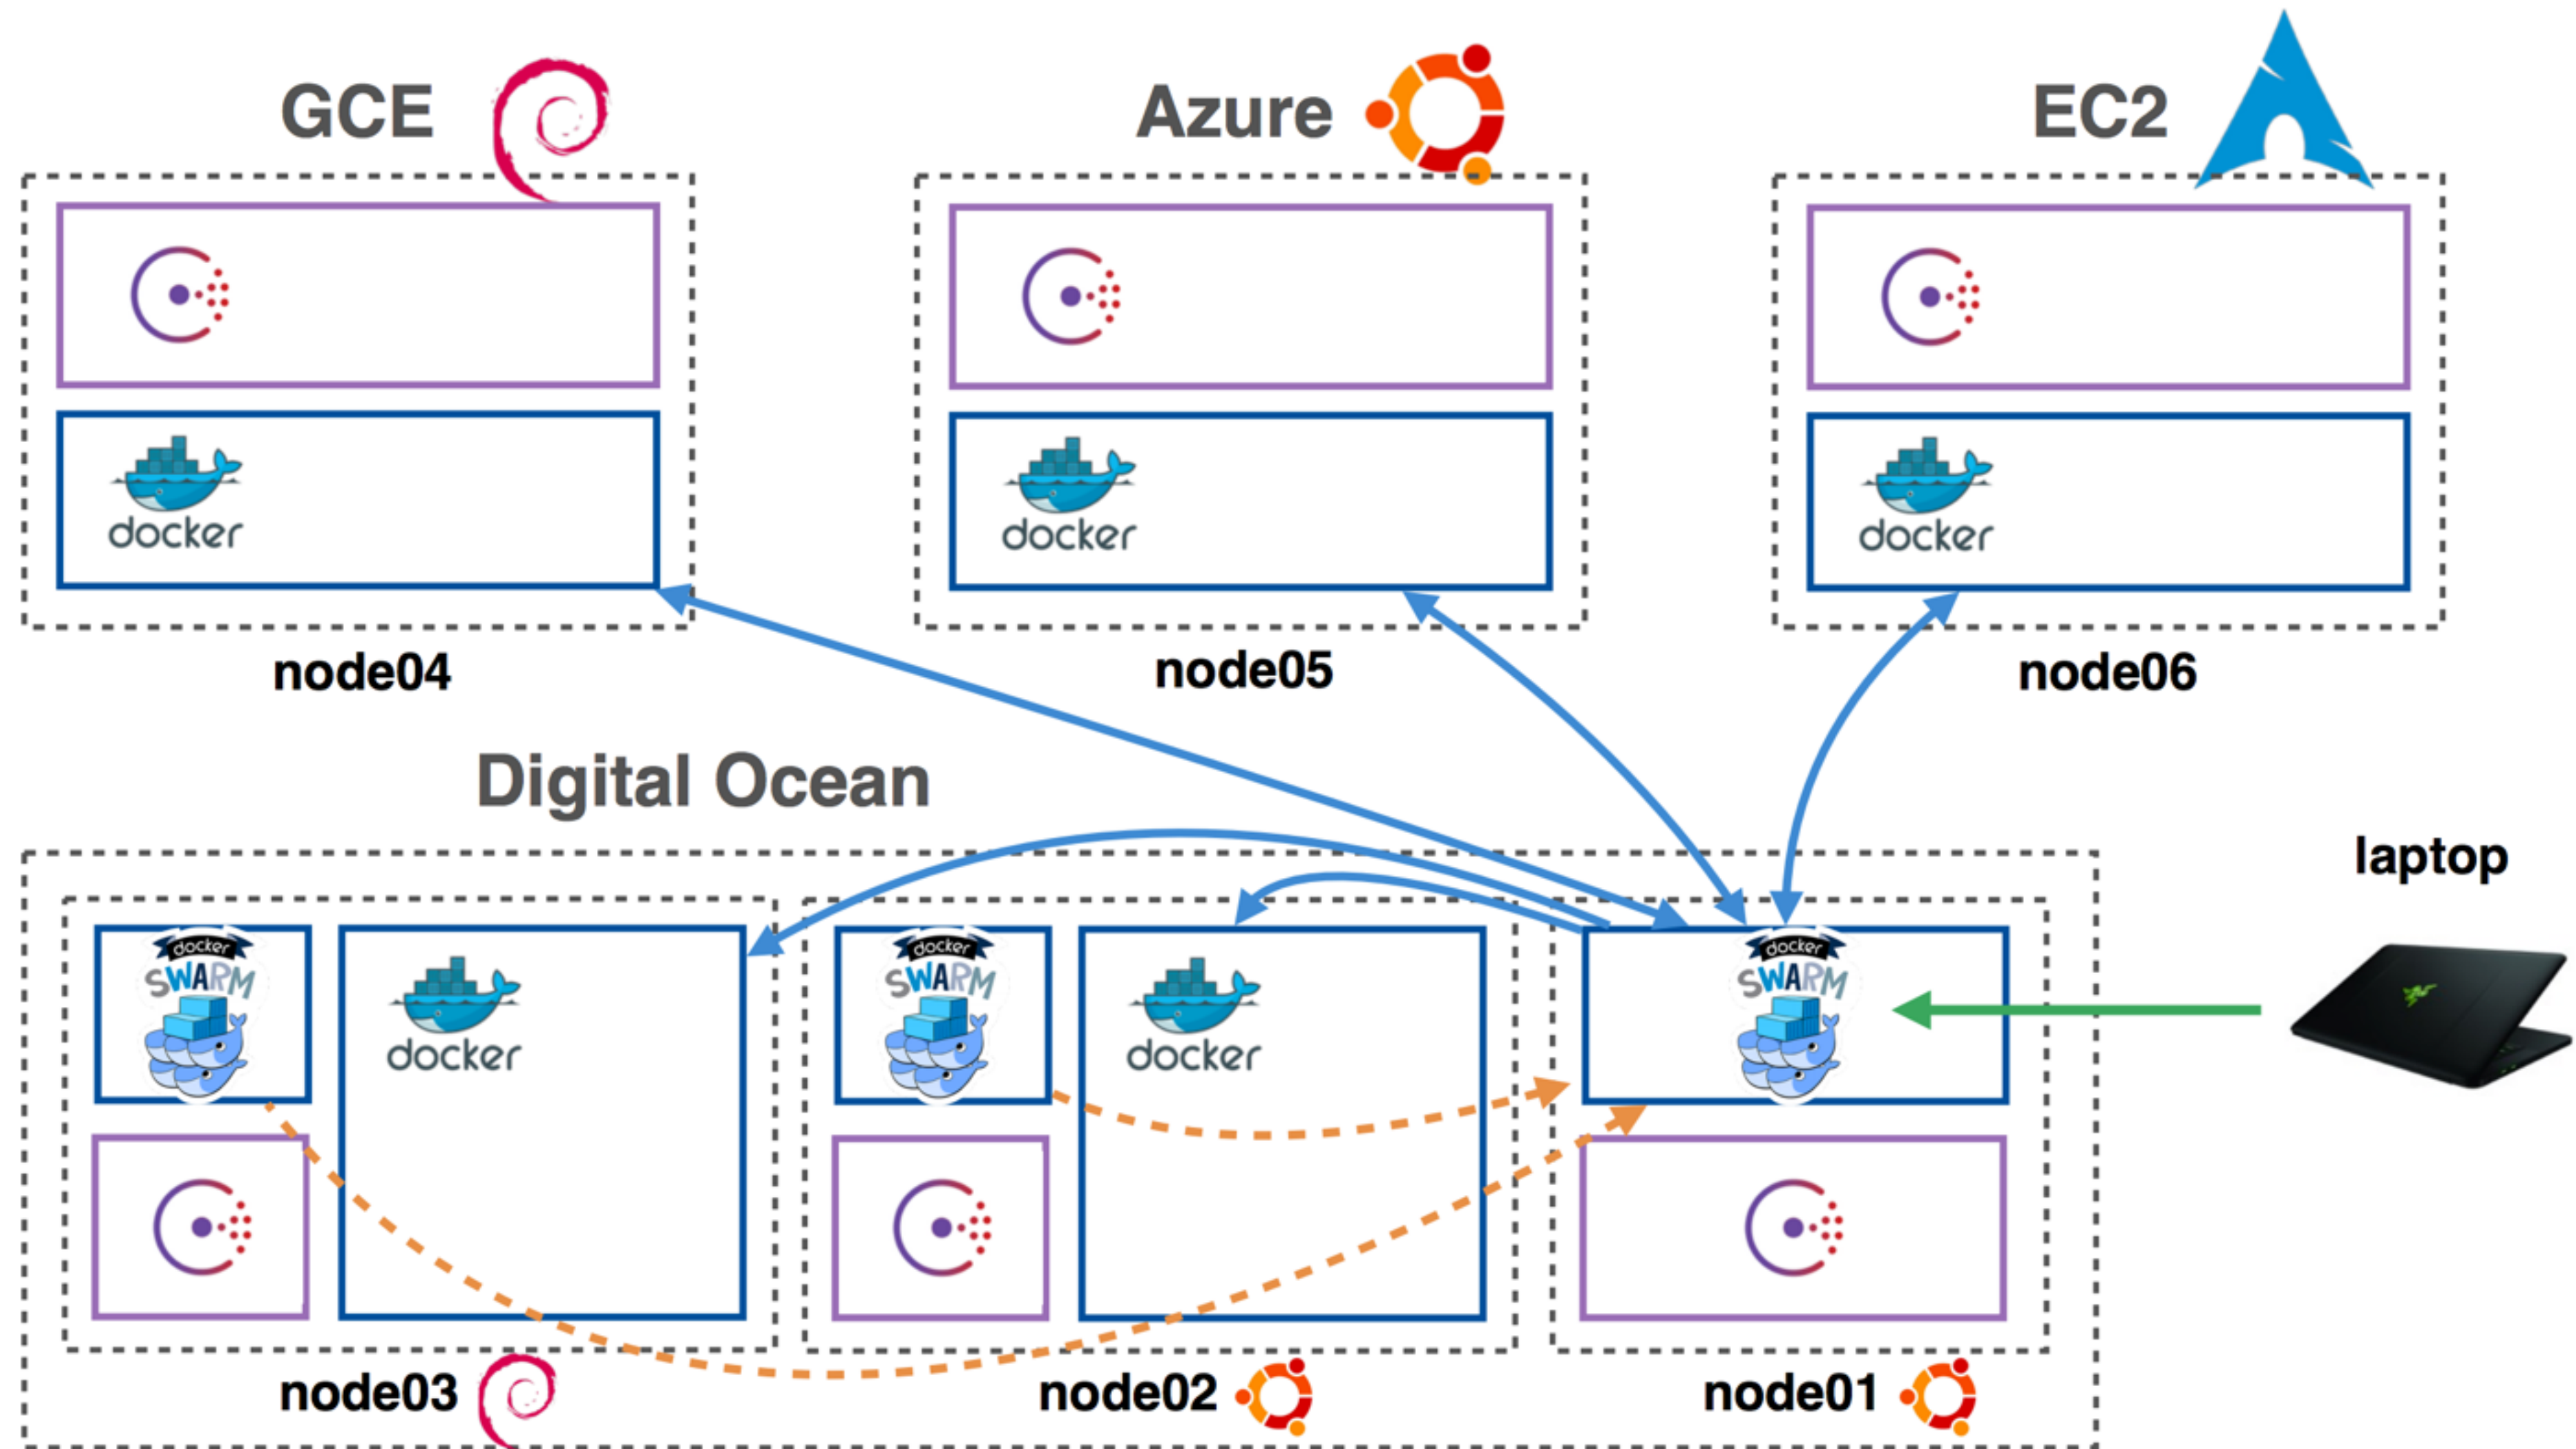


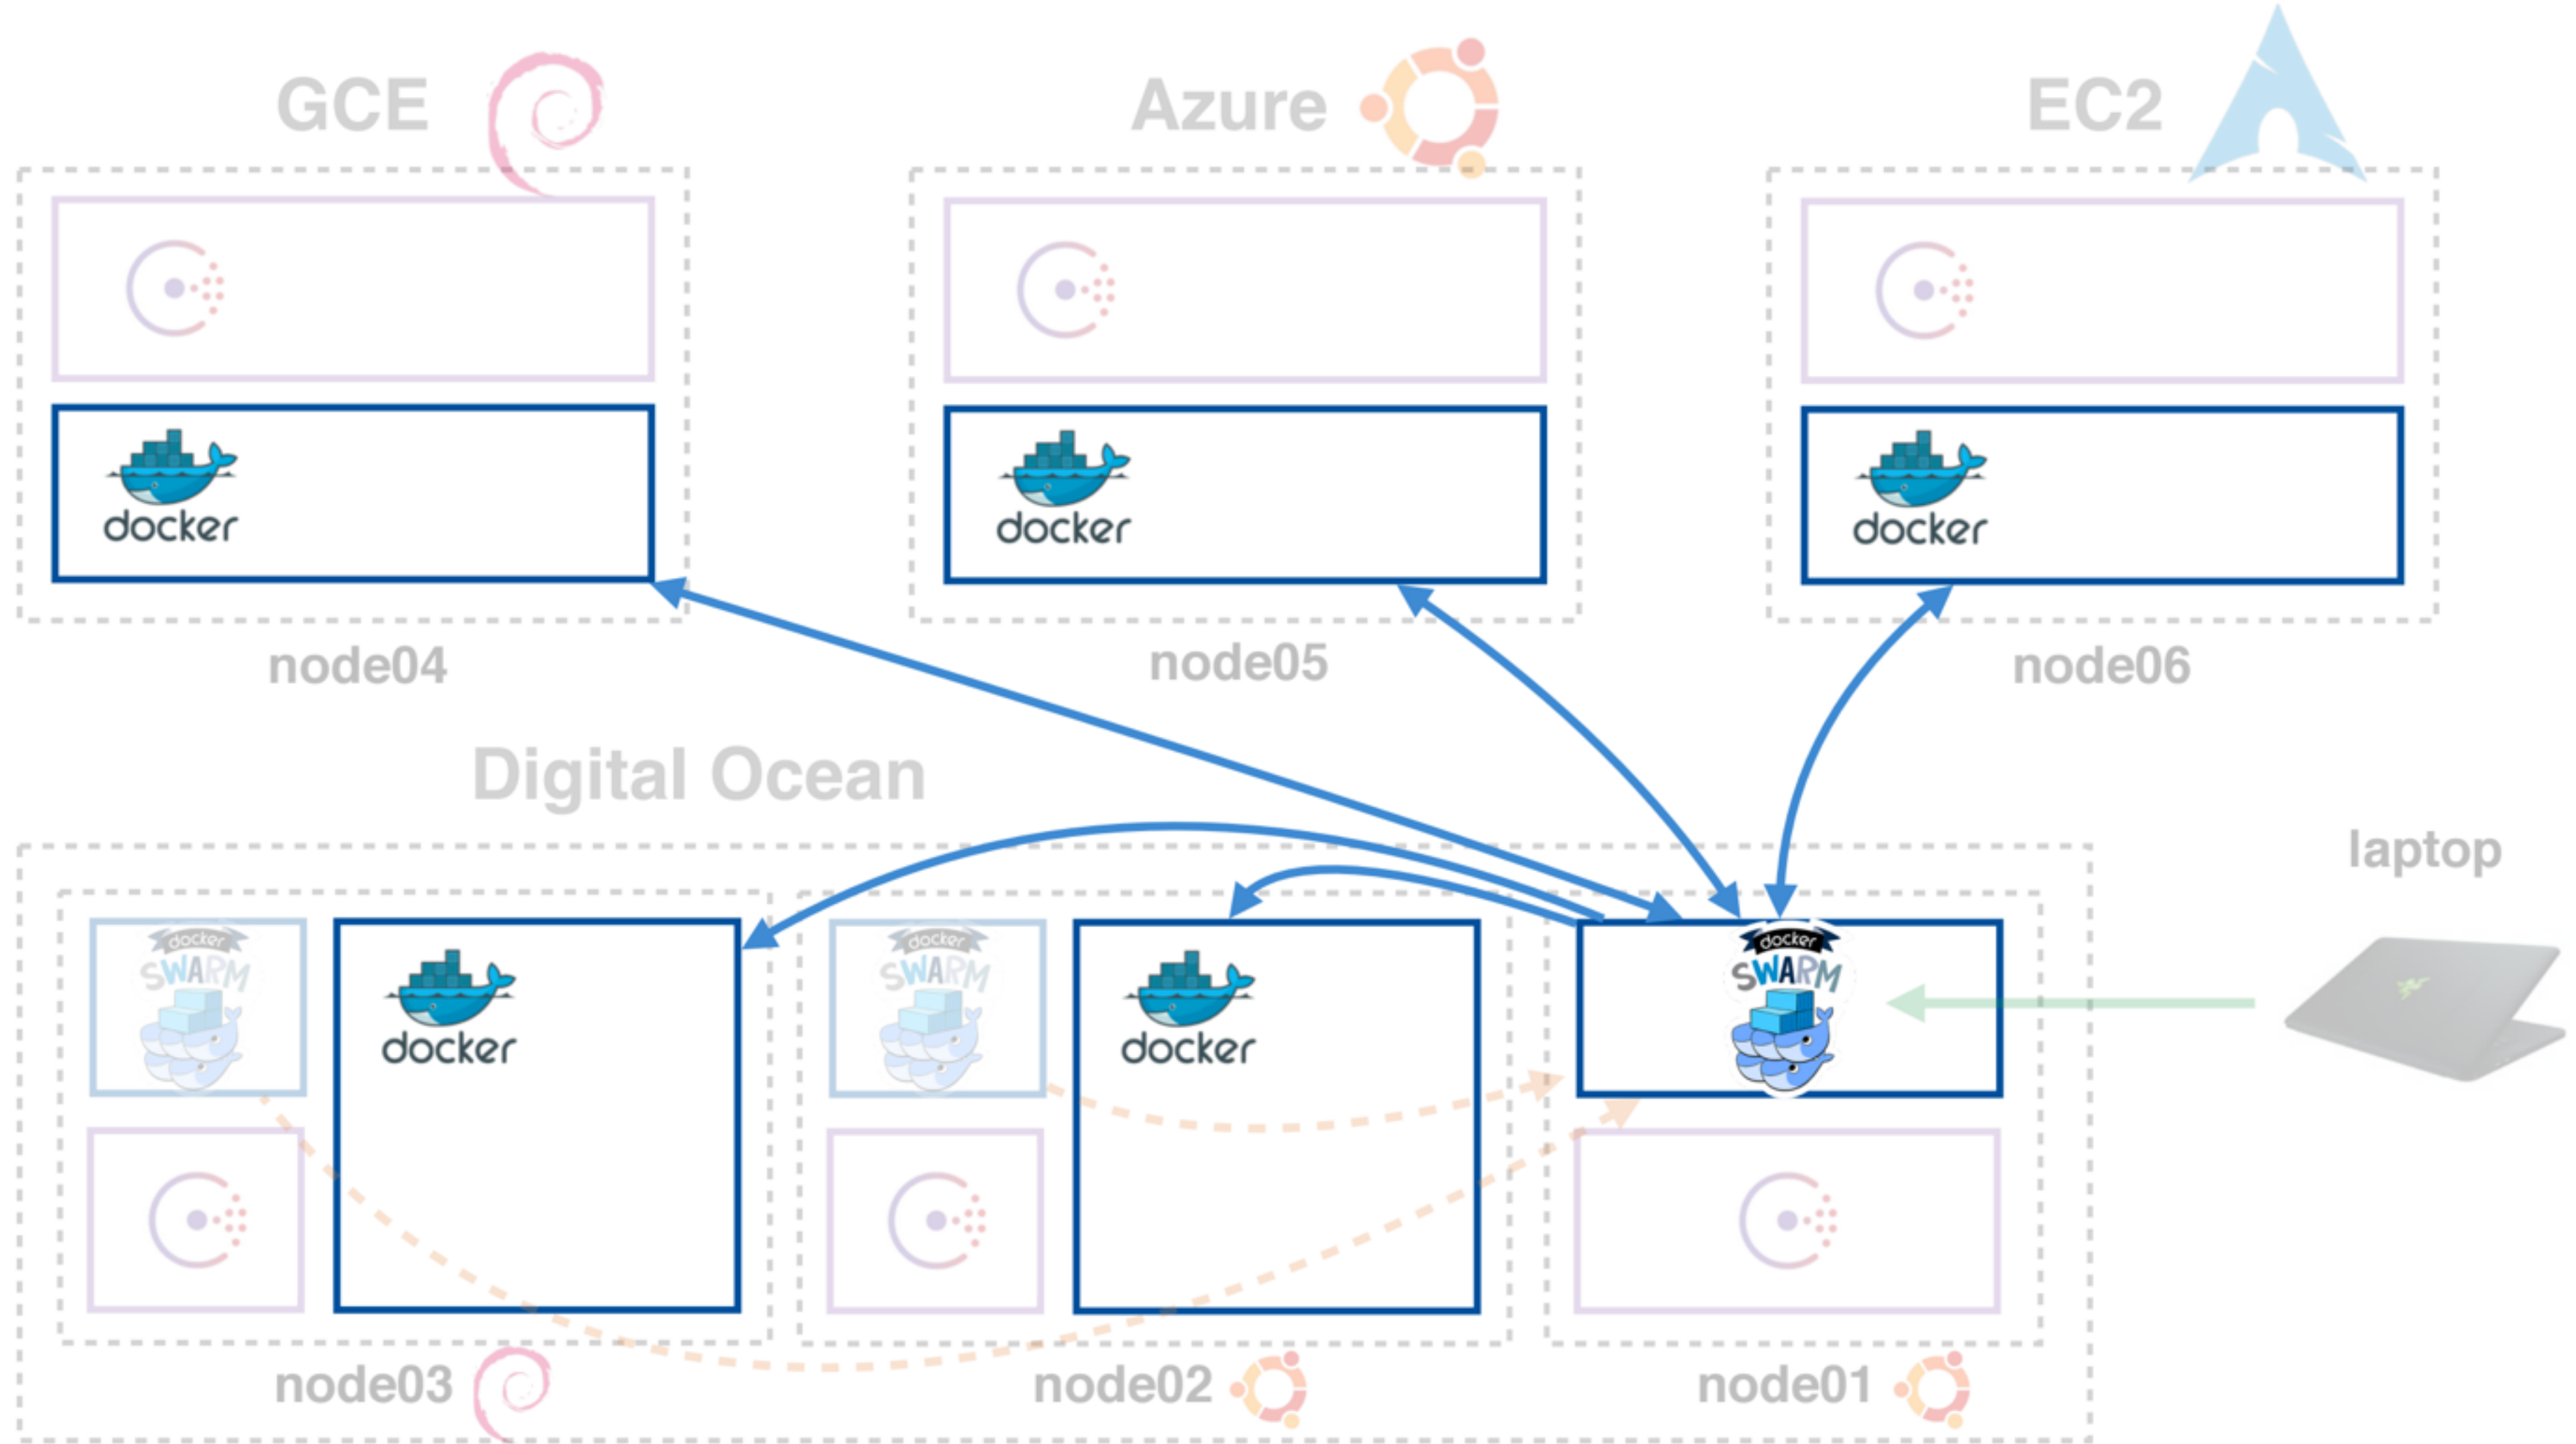


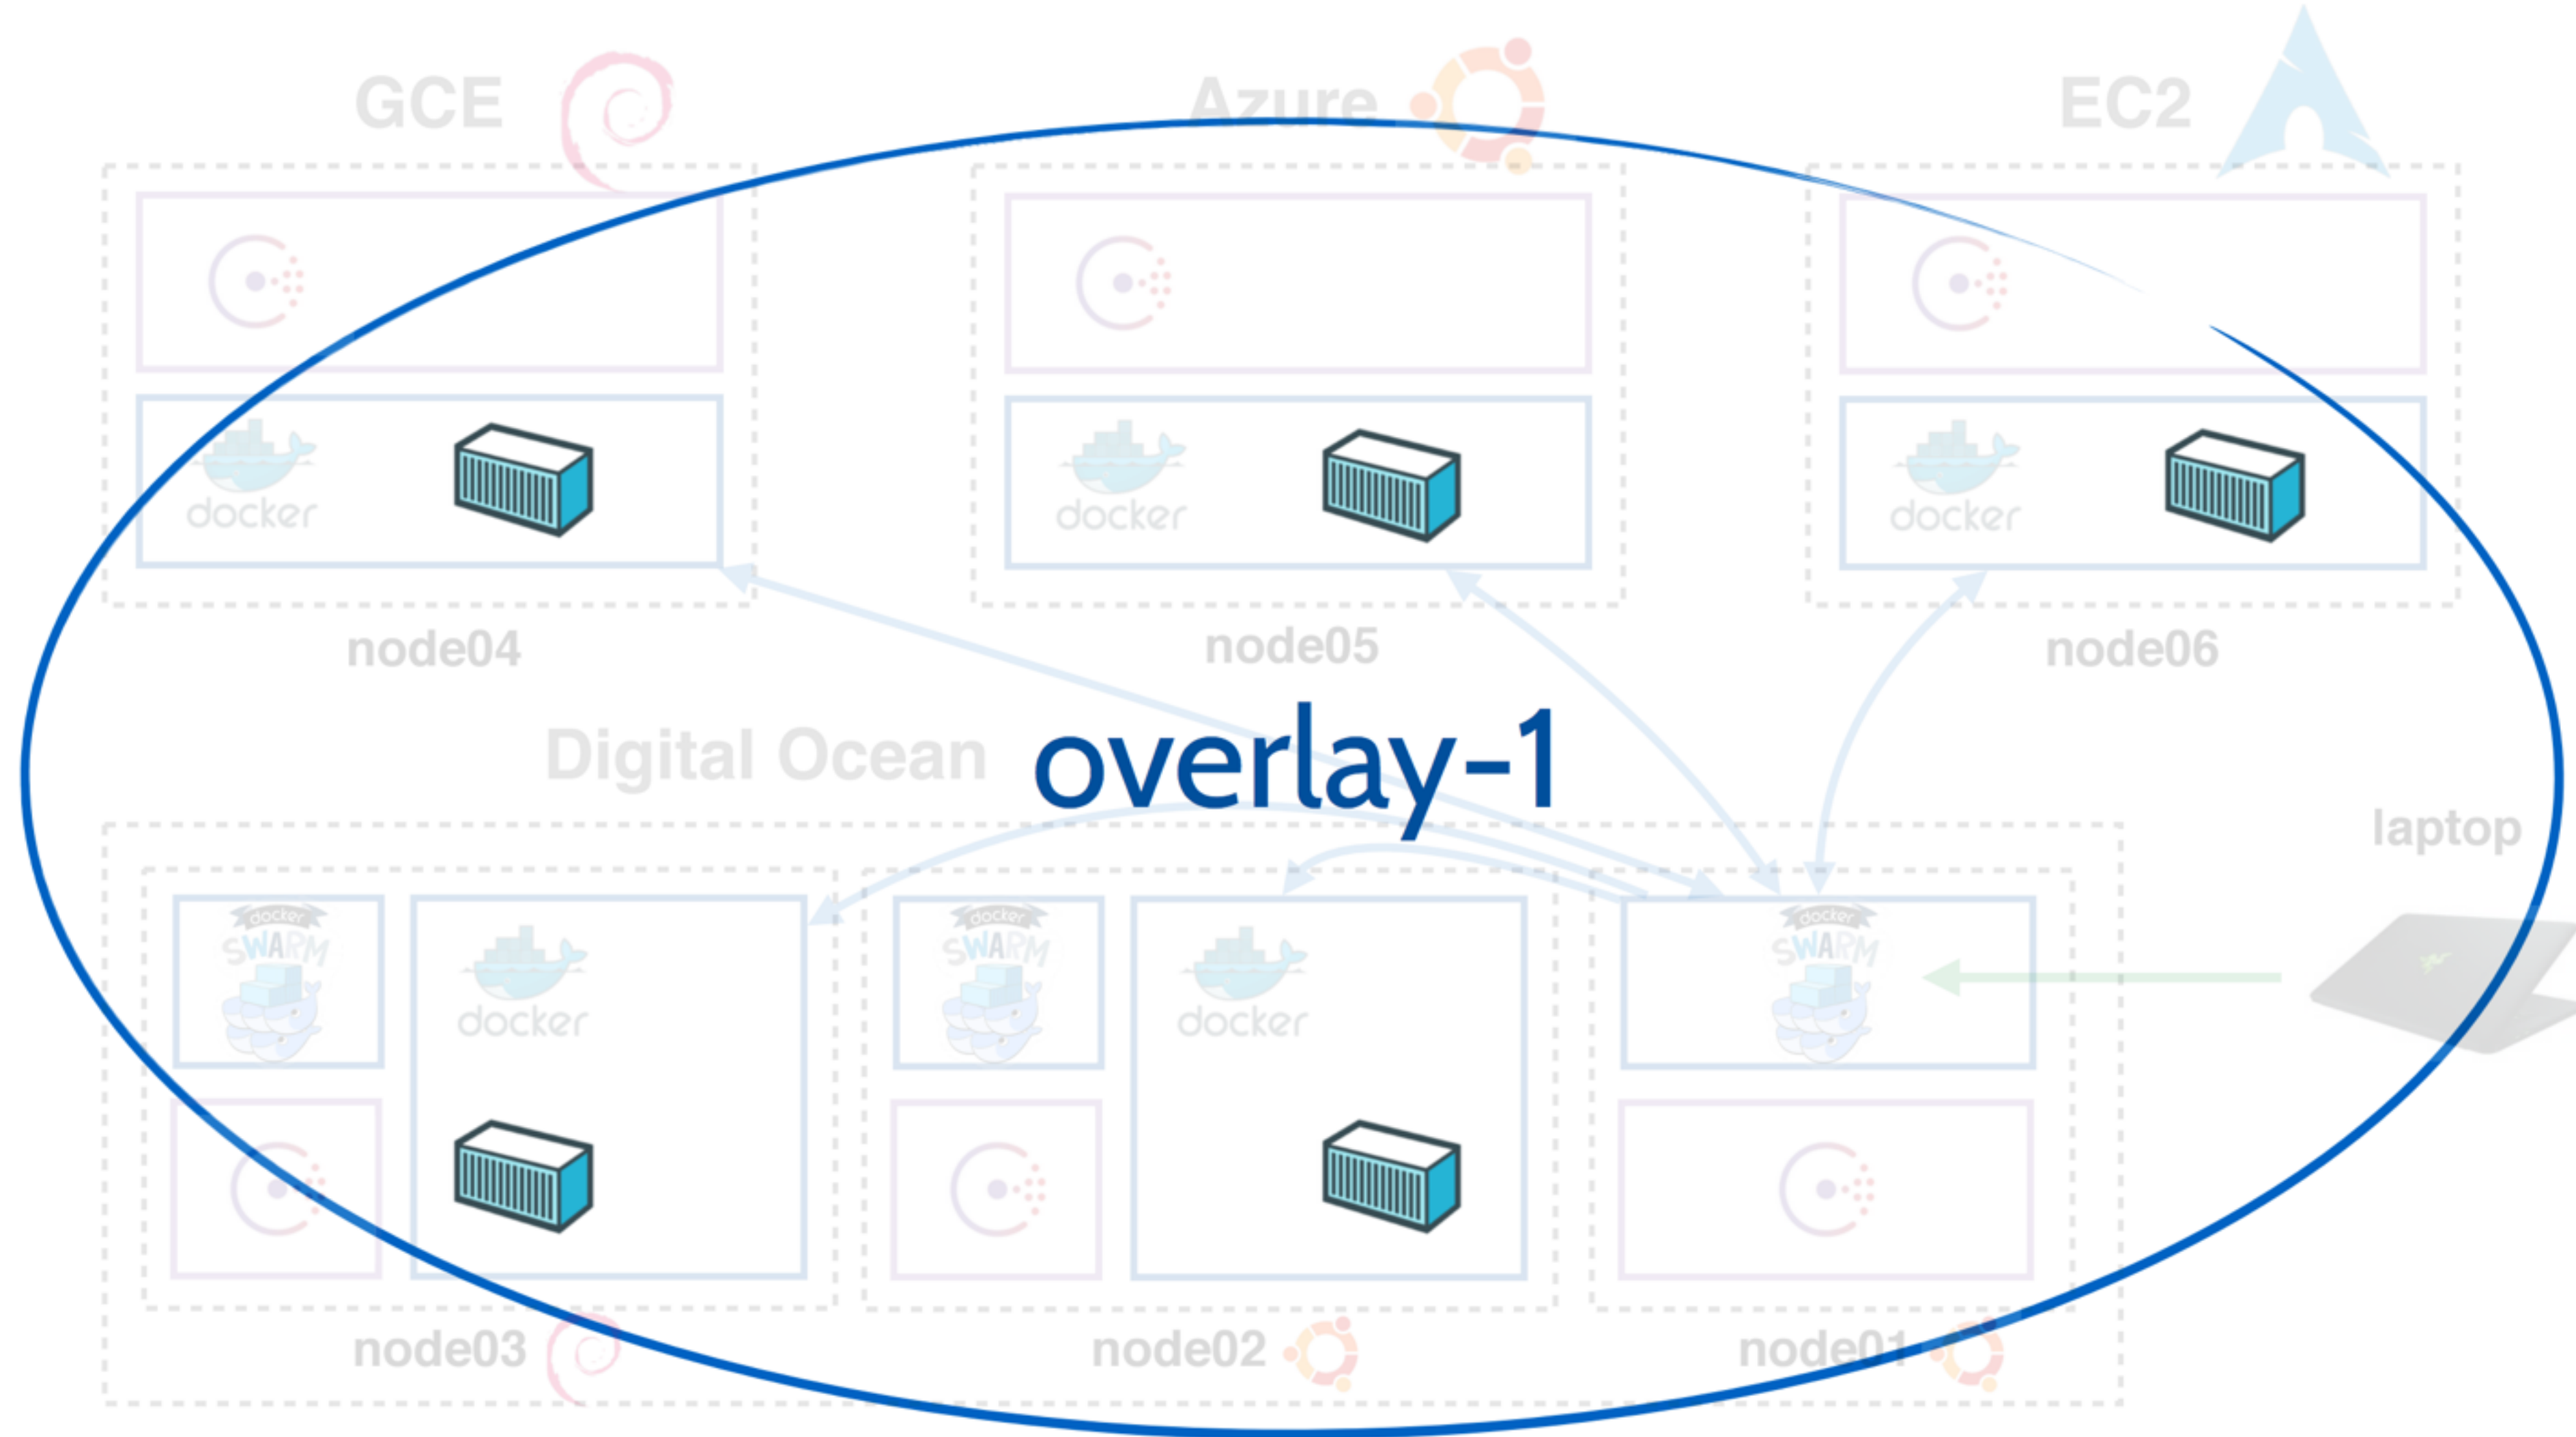

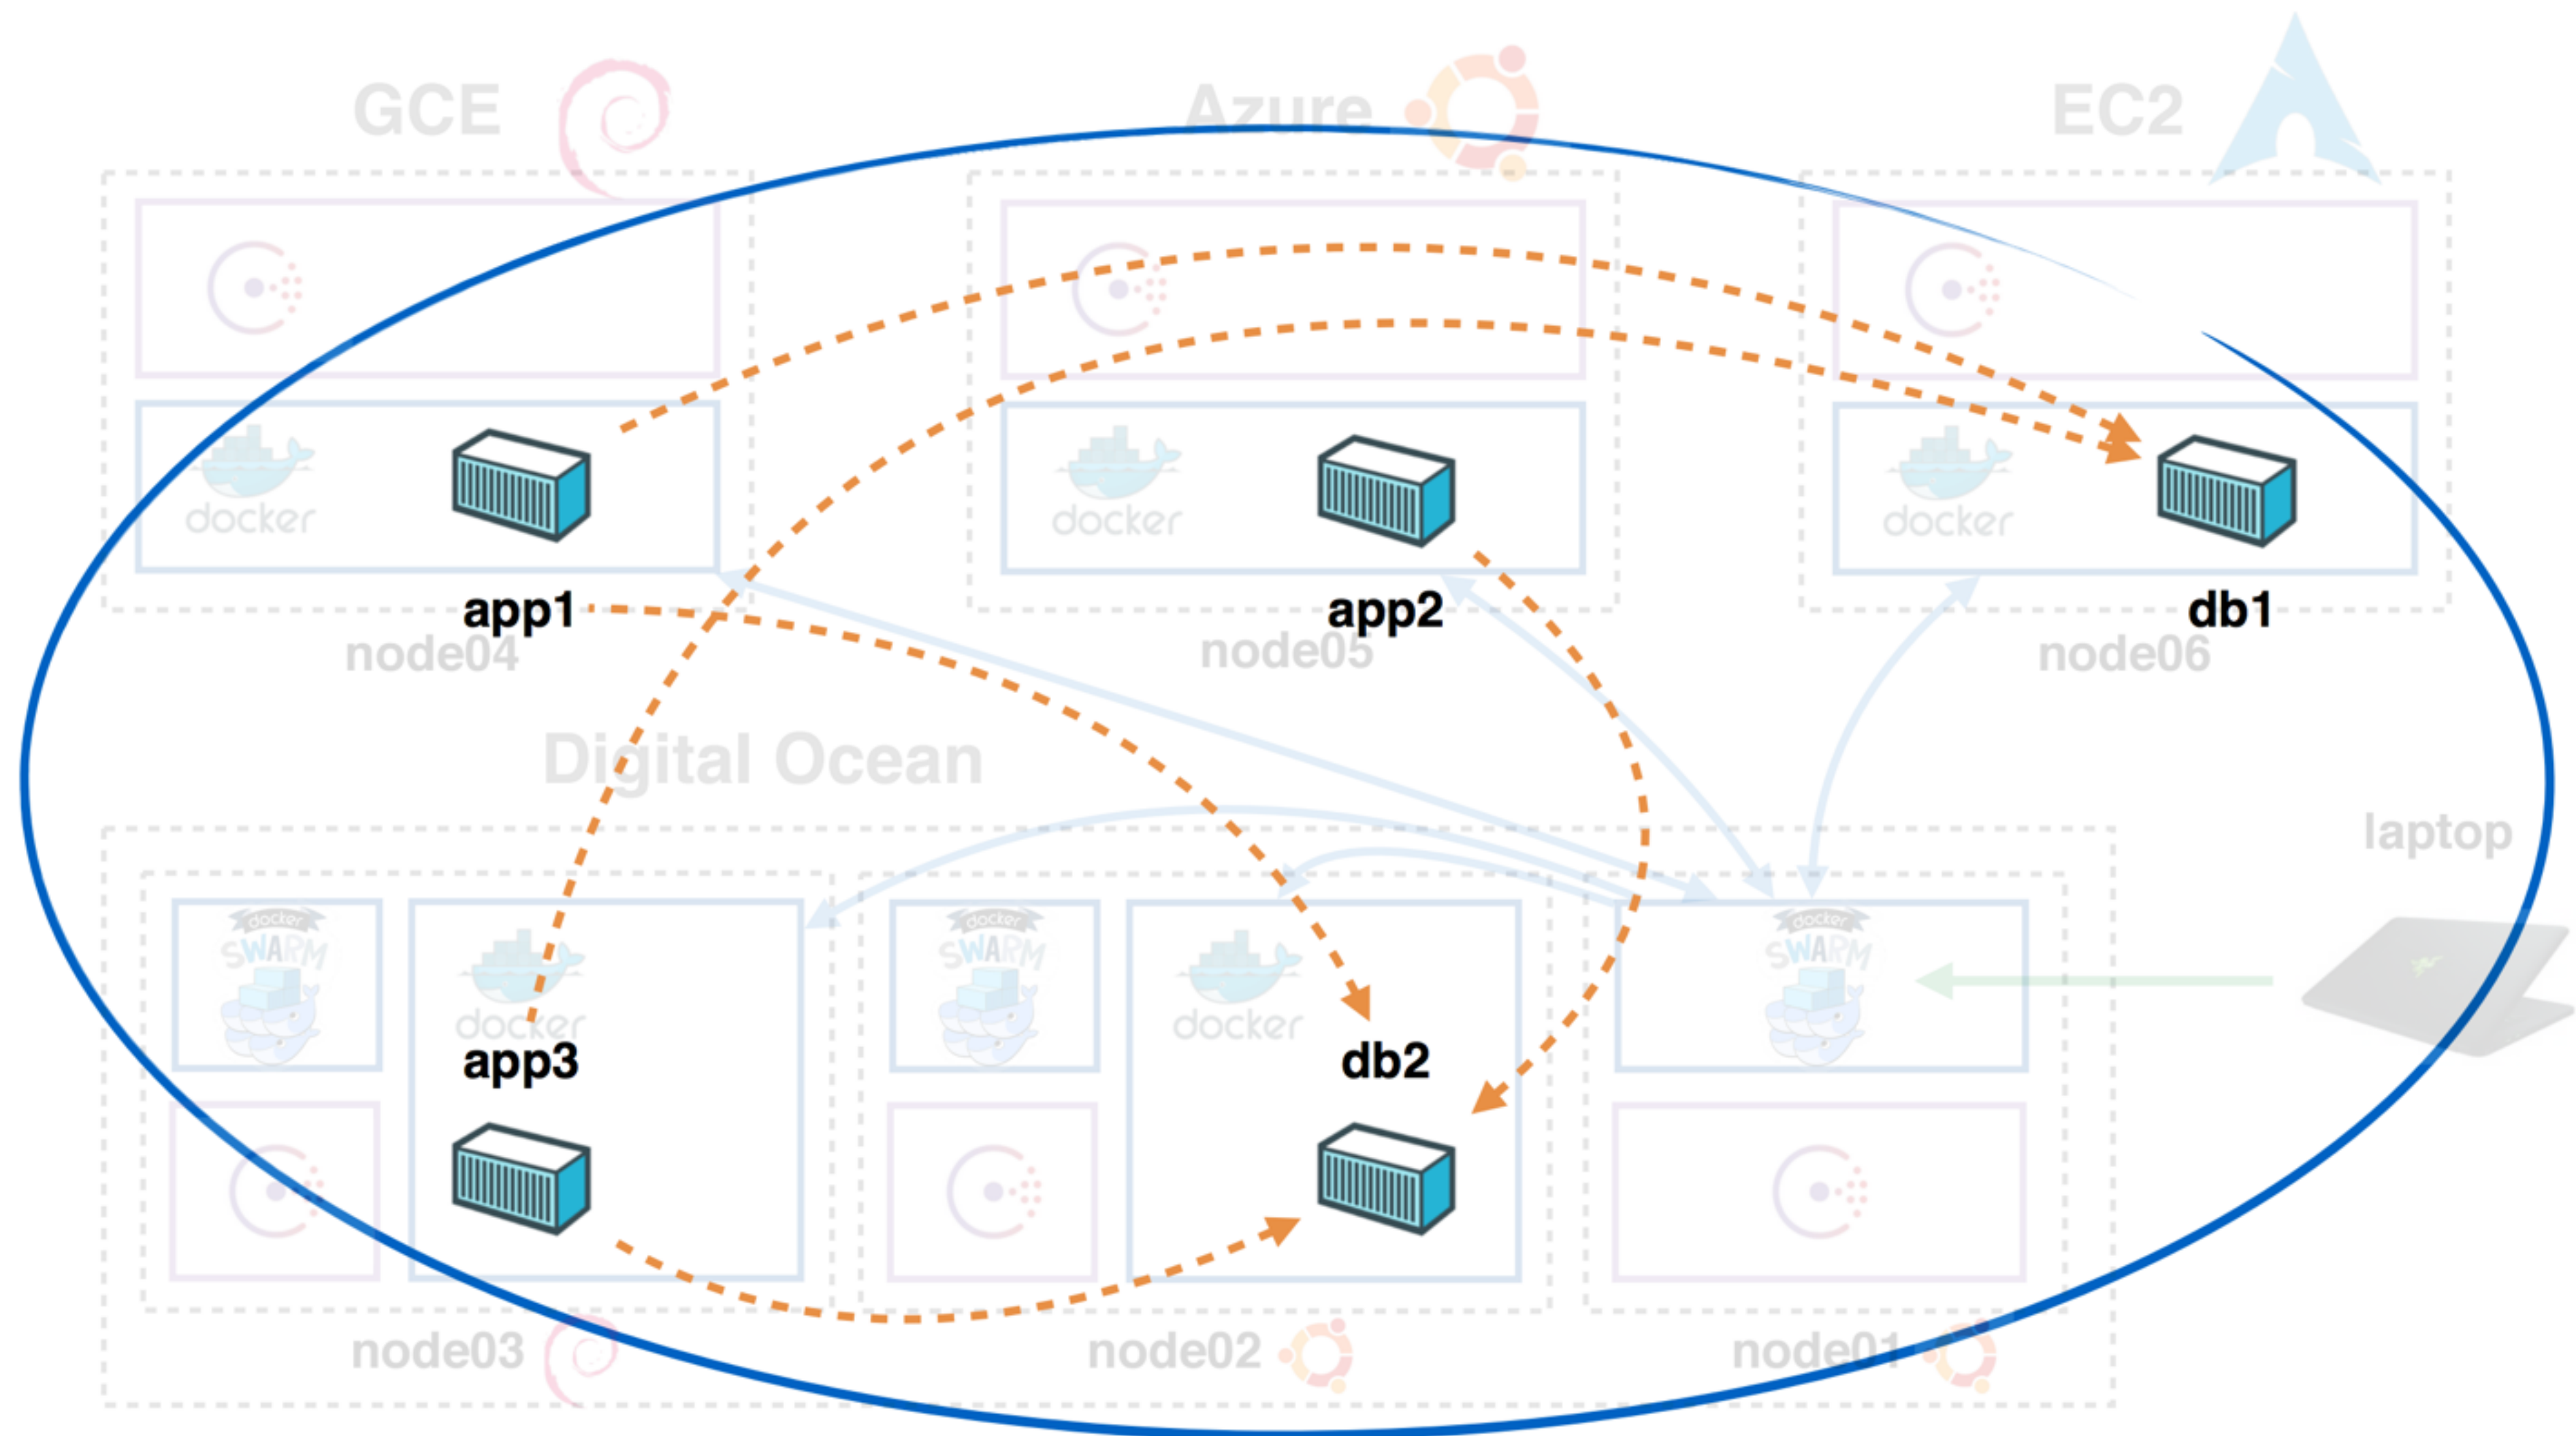

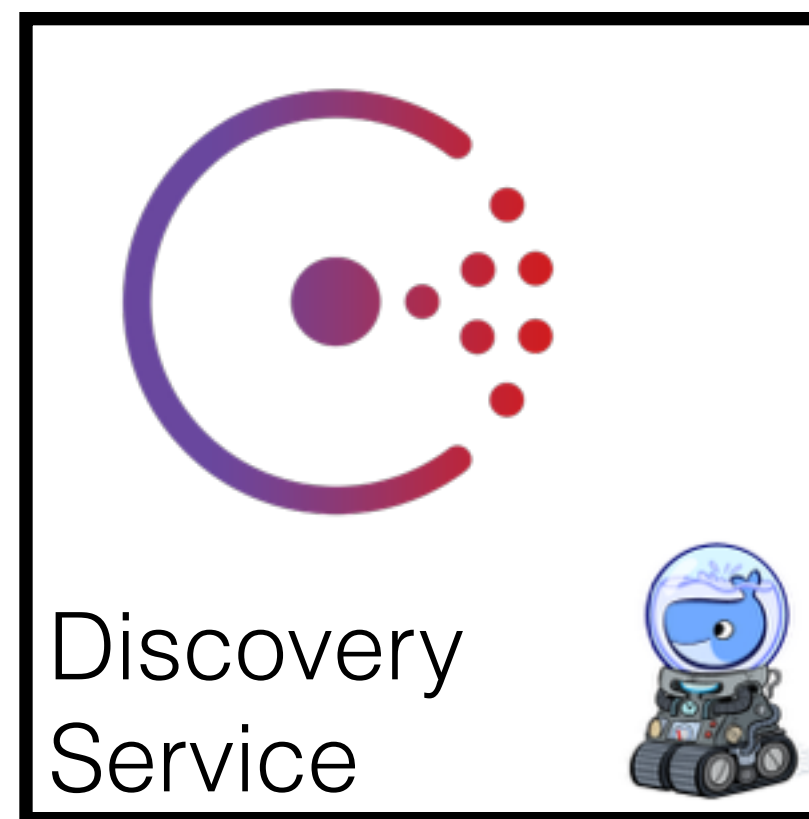

```
mycouchbase:  
  container_name: "db"  
  image: couchbase/server  
  ports:  
    - 8091:8091  
    - 8092:8092  
    - 8093:8093  
    - 11210:11210  
mywildfly:  
  image: arungupta/wildfly-admin  
  environment:  
    - COUCHBASE_URI=db  
  ports:  
    - 8080:8080  
    - 9990:9990
```

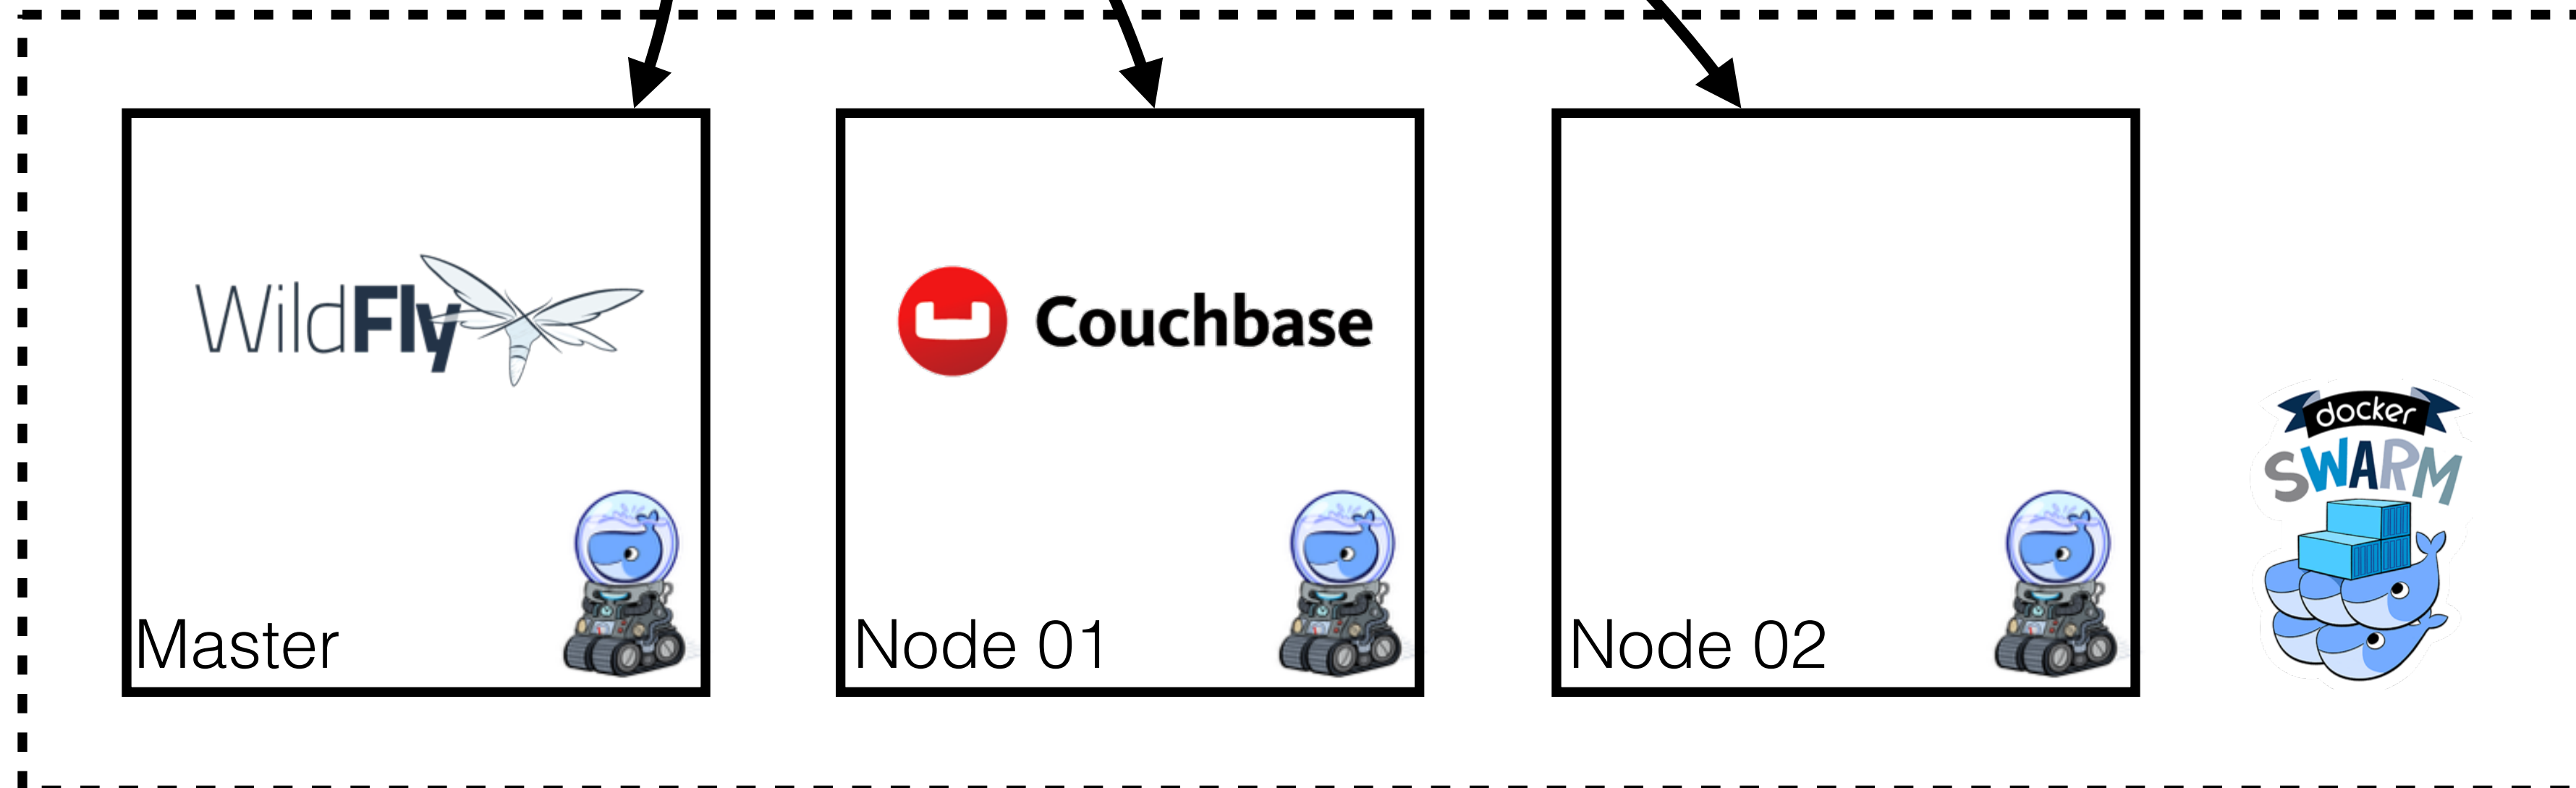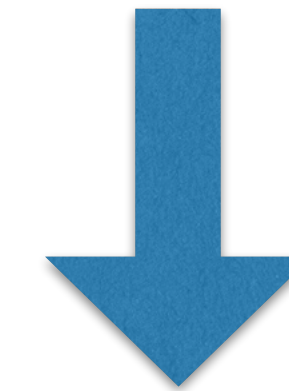

Docker Tutum

- SaaS
- Build your images
- Deploy and manage across different clouds
 - Amazon, Digital Ocean, Microsoft, Azure, IBM SoftLayer
 - BYON



Docker Tutum



Build

Containerize your applications and accelerate development.



Deploy


All frameworks and technologies welcomed.
Scale with ease on any Cloud.



Manage

Simplify operations, focus on your code, and forget about managing servers.

Docker Tutum Architecture

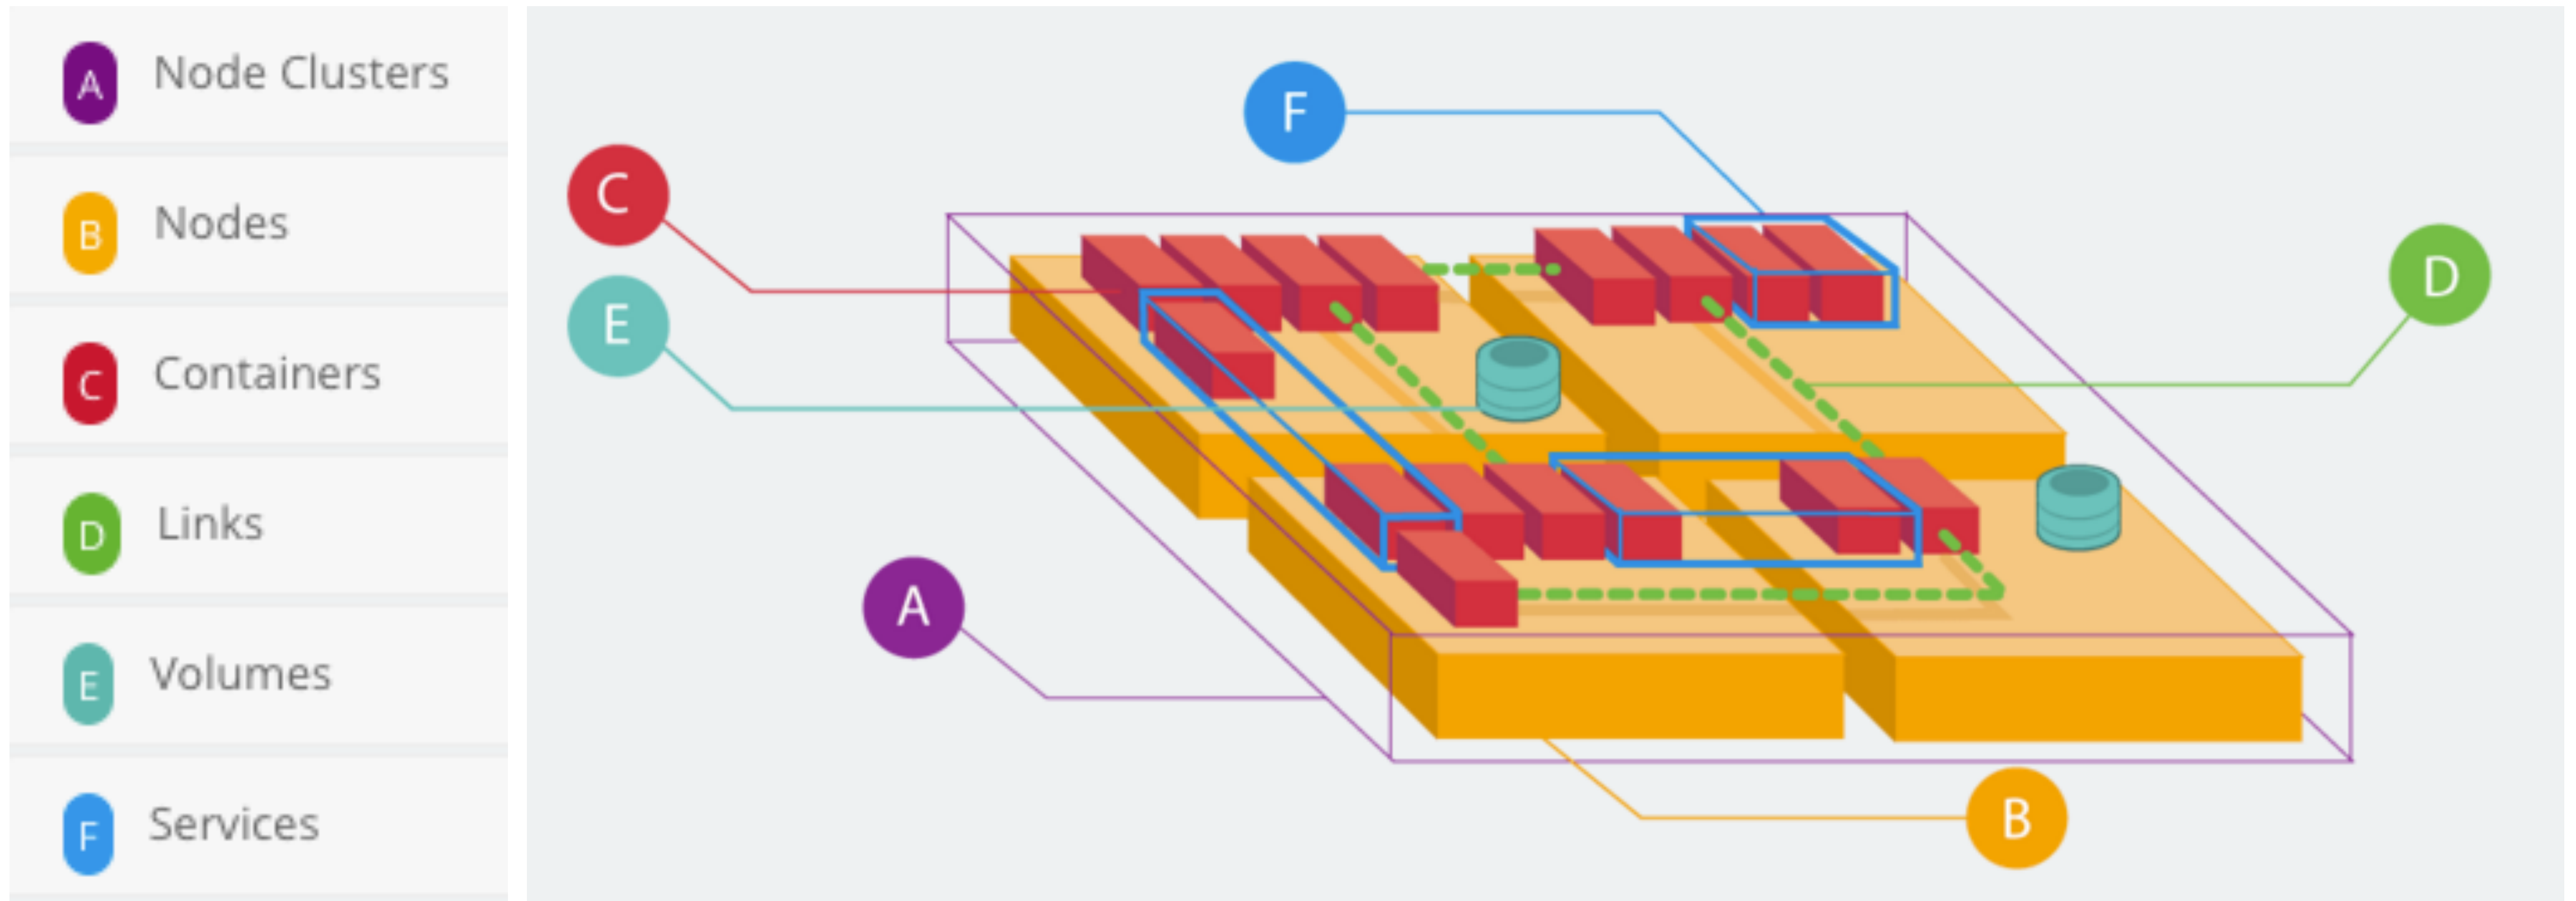

StacksServicesNodesRepositories

Tutum is in BETA

Node cluster name

my-couchbase-node-cluster

Deploy tags

couchbase x

Provider

Amazon Web Services

Region

US West (N. California)

VPC

Auto

Subnet

Auto

1

Image selection

2

Service configuration

3

Environment variables

Vol

unnamed.png

Jumpstarts

Public repositories

Search Docker hub

Other

arungupta/couchbase-node

Image

arungupta/couchbase-node

Service name

couchbase-node-fac95d8b

Image tag

latest

Stack

(No stack)

Deployment strategy

Emptiest node



Running

3 minutes ago ContainersEndpointsLogsMonitoringTriggersTimelineConfiguration

arungupta/couchbase-node:latest

_ /entrypoint.sh /opt/couchbase...

8091->8091/tcp 8092->8092/tcp 8093->8093/tcp 11210->11210/tcp

11207/tcp 11211/tcp 18091/tcp 18092/tcp

Off

Off

Emptiest node

Off

Off

None

Bridge

```
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.247835009Z * upload completely sent off: 26 out of 26 bytes
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.248977666Z < HTTP/1.1 200 OK
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249020953Z < Server: Couchbase Server
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249365963Z < Pragma: no-cache
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249409724Z < Date: Wed, 03 Feb 2016 20:06:42 GMT
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249489512Z < Content-Length: 0
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249528198Z < Cache-Control: no-cache
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.249571522Z <
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.250261947Z 100 26 0 0 100 26 0 8575 ---:---
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.250277355Z * Connection #0 to host 127.0.0.1 left intact
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253313334Z * Trying 127.0.0.1...
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253618754Z % Total % Received % Xferd Average Speed Time
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253642122Z Dload Upload Total
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253714119Z 0 0 0 0 0 0 0 0 ---:---
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253754581Z > POST /settings/web HTTP/1.1
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253788662Z > User-Agent: curl/7.40.0-DEV
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253824697Z > Host: 127.0.0.1:8091
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253862253Z > Accept: */*
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253895929Z > Content-Length: 50
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253928590Z > Content-Type: application/x-www-form-urlencoded
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.253961879Z >
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.254111279Z } [50 bytes data]
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.254450034Z * upload completely sent off: 50 out of 50 bytes
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.258238369Z < HTTP/1.1 200 OK
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259238010Z < Server: Couchbase Server
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259248898Z < Pragma: no-cache
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259254761Z < Date: Wed, 03 Feb 2016 20:06:42 GMT
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259260017Z < Content-Type: application/json
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259264991Z < Content-Length: 39
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259269960Z < Cache-Control: no-cache
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259274912Z <
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259279708Z { [39 bytes data]
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259284462Z 100 89 100 39 100 50 7623 9773 ---:---
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259289392Z * Connection #0 to host 127.0.0.1 left intact
couchbase-node-fac95d8b-1 2016-02-03T20:06:42.259230506Z {"newBaseUri":"http://127.0.0.1:8091/"}entrypoint.sh co
```

ers 1

ags

rts

Container port	Protocol	Published	Node port	
8091	tcp	<input checked="" type="checkbox"/>	8091	
8092	tcp	<input checked="" type="checkbox"/>	8092	
8093	tcp	<input checked="" type="checkbox"/>	8093	
11207	tcp	<input type="checkbox"/>	--	
11210	tcp	<input checked="" type="checkbox"/>	11210	



Docker Registry

- Store and distribute Docker images
 - Control where images are stored
 - Own image distribution pipeline
 - Integrate image storage/distribution in dev workflow
- Docker Hub
 - Free-to-use and hosted
- Docker Trusted Registry
 - Commercially supported
 - RBAC, LDAP/AD integration, updates, etc


Registry Primary Usage Scenario



- CI/CD with Docker
 - Centrally located base images
 - Store individual build images
 - Pull tested images to production

CI/CD with Docker + Jenkins

1. Push a commit to GitHub
2. GitHub webhook
3. Jenkins copies artifacts
4. Jenkins builds Docker image
5. Runs test on Docker container
6. Pushes to DTR

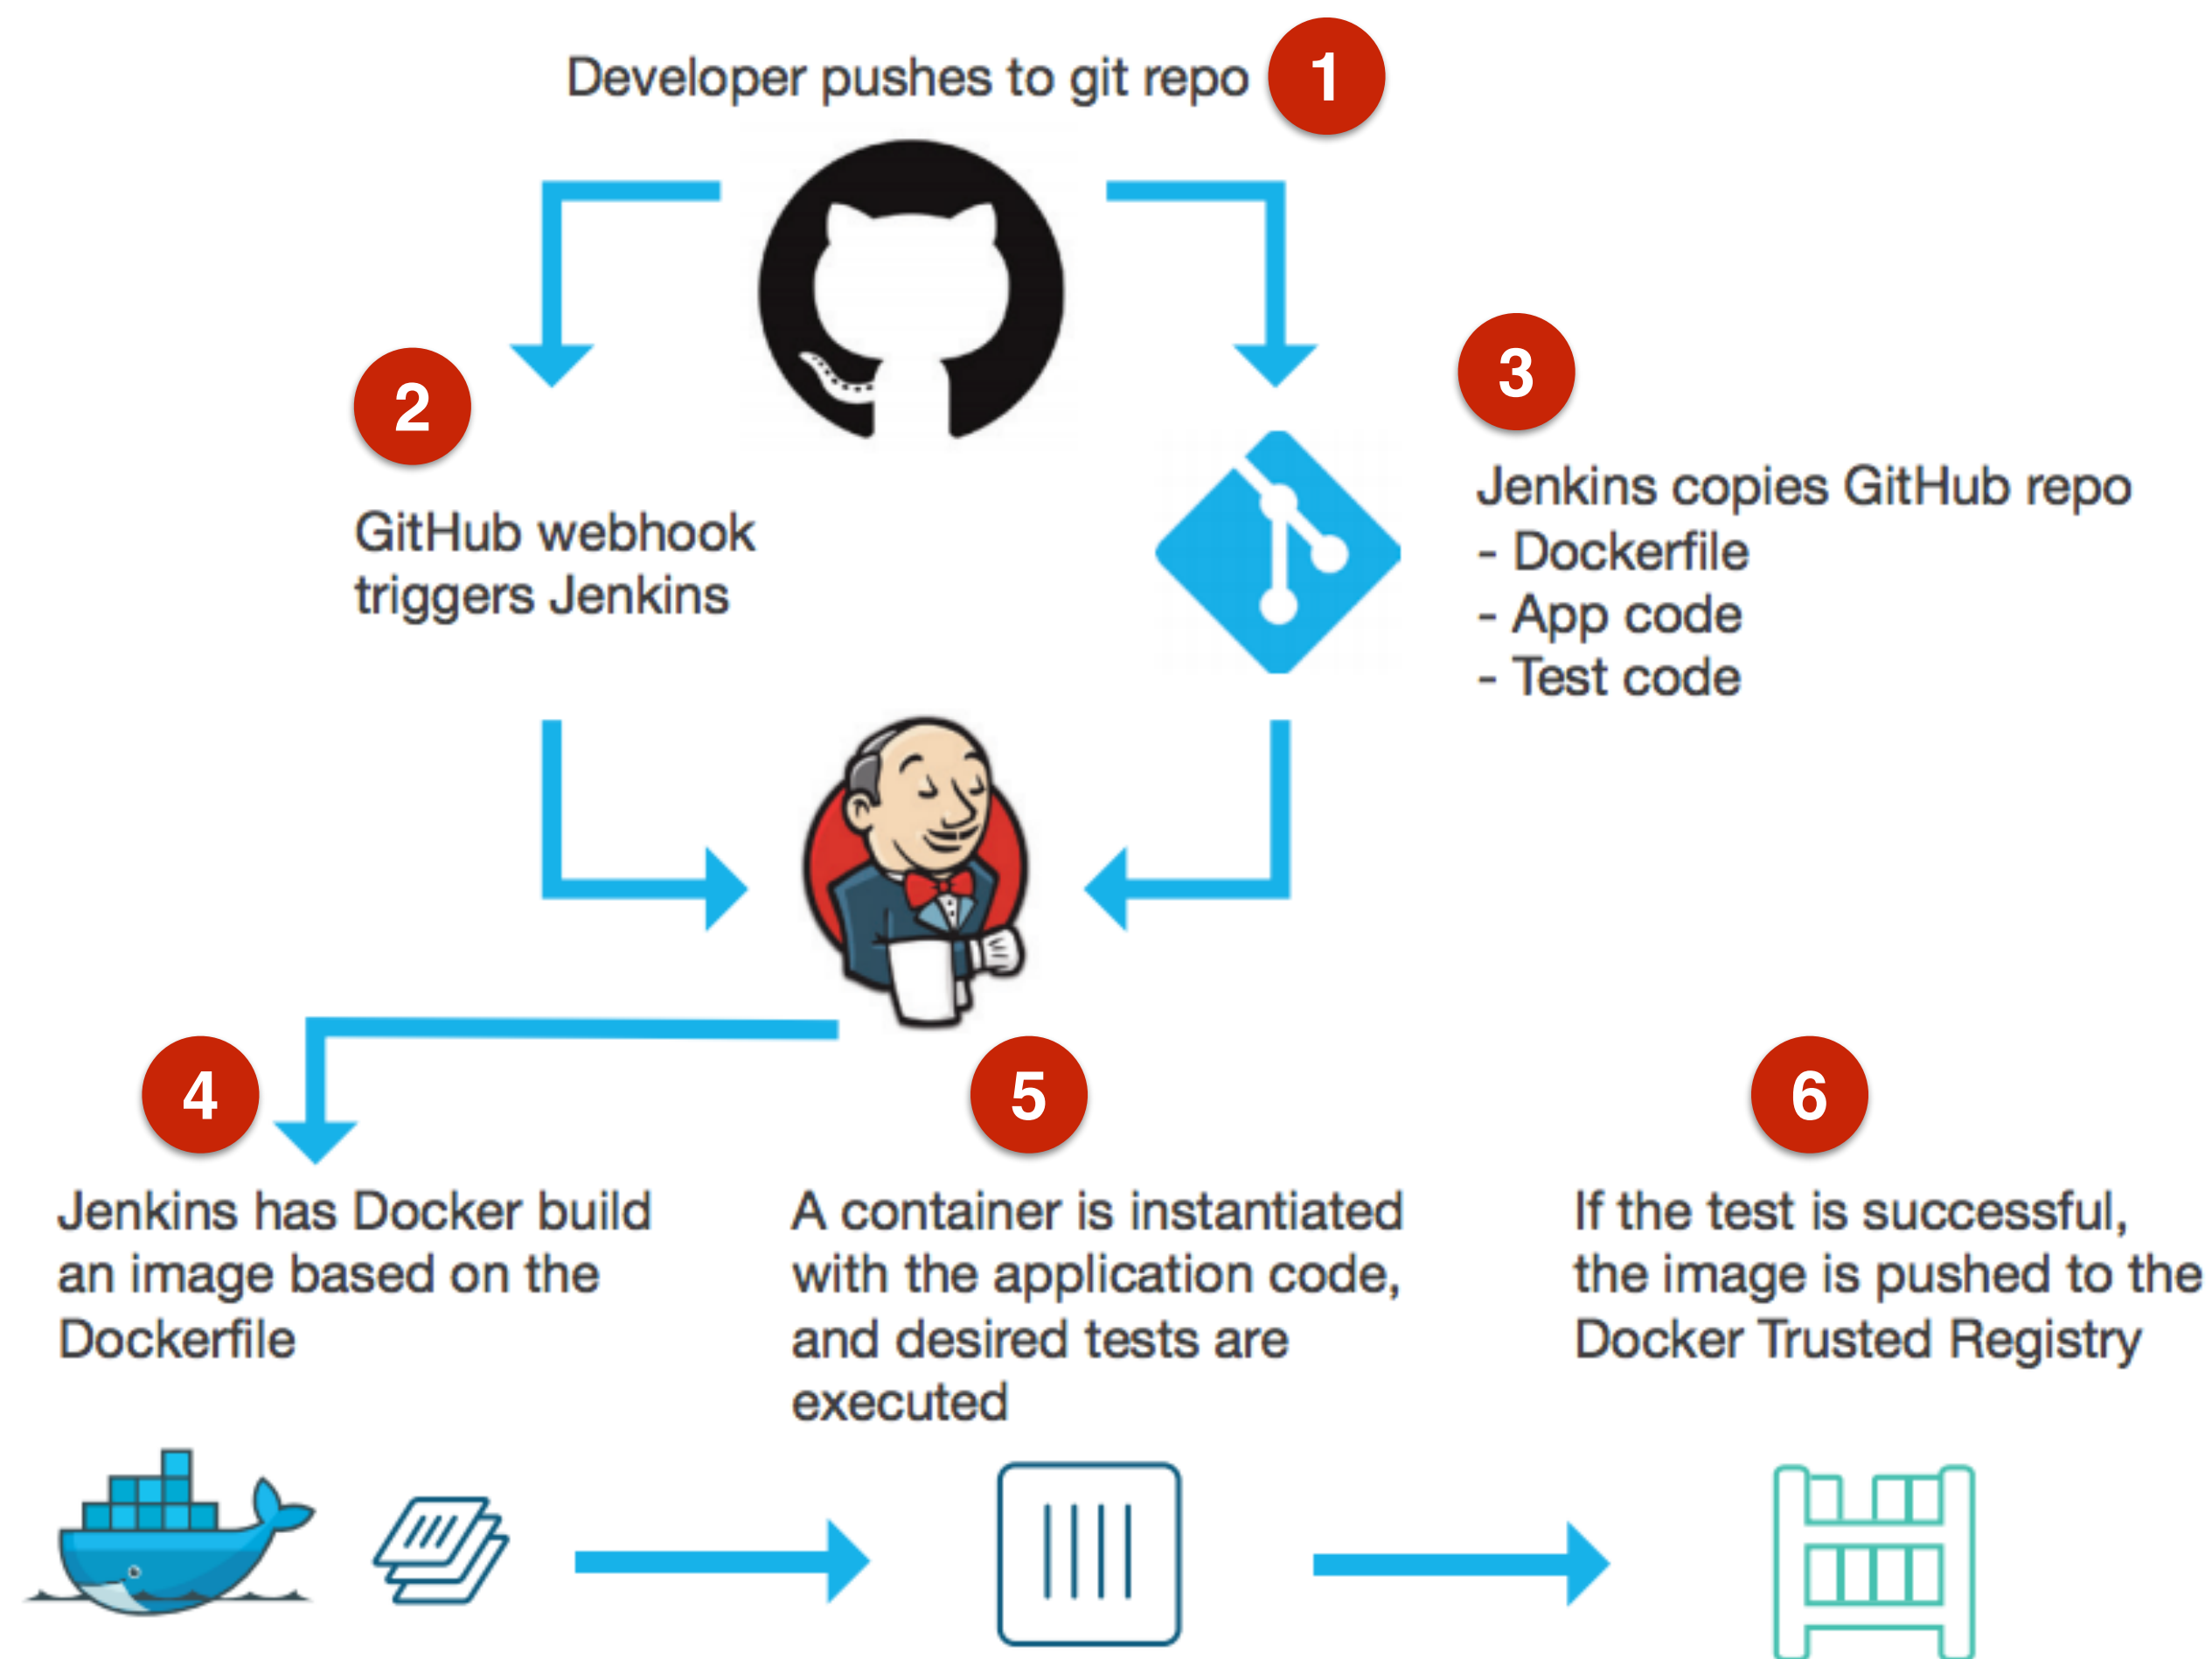

Monitoring Docker Containers

- `docker stats` command

- LogEntries



- Docker Remote API: `/container/{container-name|cid}/stats`

- Docker Universal Control Plane




- cAdvisor

- Prometheus

- InfluxDB



Docker Mission

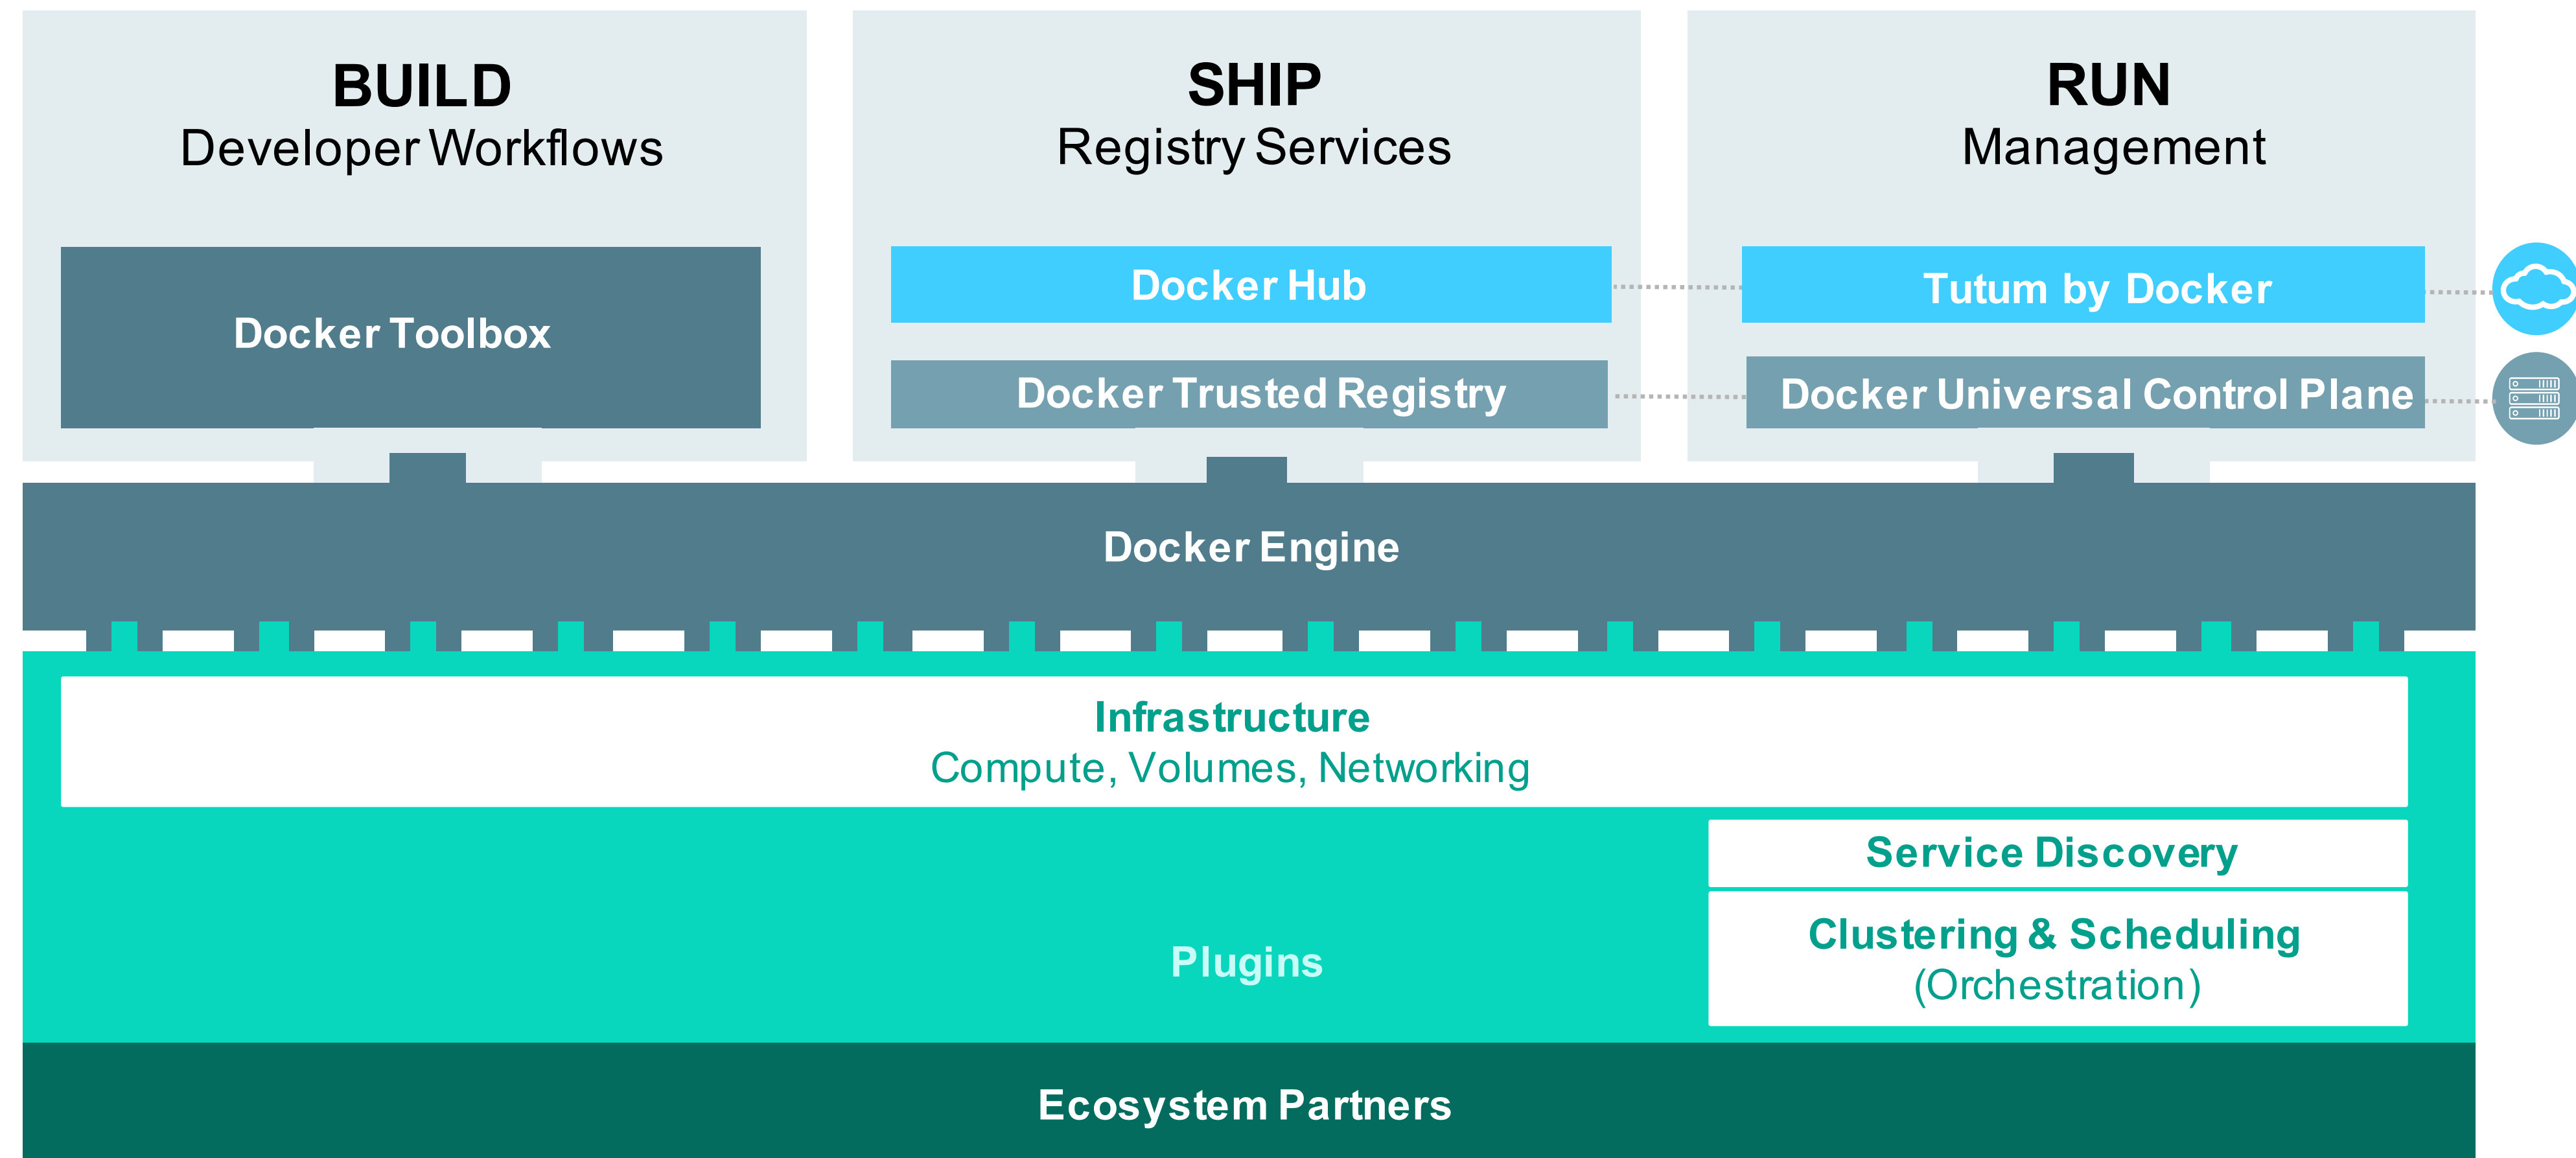

References

- github.com/javaee-samples/docker-java
- docs.docker.com